

ISOLMANT FASCIA NASTRO

IMPACT SOUND - ACCESSORIES

Specific for taping underlay sheets together, suitable for all isolmant products

WHAT IS ISOLMANT FASCIA NASTRO?

7.5 cm adhesive tape that is made of physically reticulated expanded closed-cell Isolmant polyethylene.

SPECIFIC APPLICATIONS

Isolmant Fascia Nastro is specific for floating screeds as provided by UNI 11516:2013 standards with any type of slab. It is ideal for sealing the sheets of the Isolmant underlay range together (especially if they do not have adhesive overlaps), thus preventing the passage of moisture and the formation of acoustic bridges that would occur if the sheets were not properly sealed together. It is also convenient for use when 'acoustic patching' is required prior to install the underscreed.



ADVANTAGES

- Suitable for all Isolmant underscreed products.
- Low thickness.
- Inalterable in time.
- Unlimited duration.
- Contact with water does not affect performance or characteristics.
- Resistant to mould or insects.

ISOLMANT FASCIA NASTRO > TECHNICAL SPECIFICATIONS


NOMINAL THICKNESS:	3 mm
CE MARKING:	Harmonised standards for CE marking are NOT currently available for acoustic insulation products. This means that Isolmant products are currently NOT subject to CE marking, nor to the drawing up of a PDO (declaration of performance) or DDP (declaration of performance). All Isolmant products are placed on the market in compliance with the regulations in force in the country of destination and with the necessary certifications to guarantee their use in dedicated applications.
SIZE:	h 7.5 cm x 50 m linear strips
PACKAGE:	4 tapes equal to 200 linear metres

ITEM SPECIFICATIONS

Adhesive tape that is used to tape and seal Isolmant sheets, made of physically reticulated expanded closed-cell polyethylene, density 30 kg/m³.

H 7.5 cm. Nominal thickness 3 mm.

ISOLMANT FASCIA NASTRO > INSTALLATION

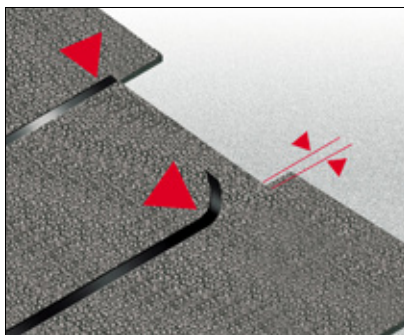

INSTALLING ISOLMANT FASCIA NASTRO

Isolmant underlay sheets must form a uniform and continuous layer in order to ensure the correct functioning of the floating screed system. It is therefore necessary (especially if the sheets do not have adhesive overlaps) to seal them with Isolmant Fascia Nastro.



WARNINGS:

* This data sheet does not constitute a specification and, if it consists of several pages, please ensure that you have consulted the complete document. Although, these instructions are the result of our best expertise they are indicative. The user should establish whether the product is suitable for its intended application. The user will be also in charge of all the responsibility for the use of the product itself.

**The sound insulation values given in this technical data sheet are the result of laboratory tests or tests carried out on site: they cannot be considered a predictive value for every situation that may occur on site. Acoustic performance is closely linked to the specific conditions of each site.

***Caution: do not expose the product to direct sunlight and bad weather.



Via dell'Industria 12, Località Francolino 20074 Carpiano (Mi) Tel. +39 02 9885701 Fax +39 02 98855702
clienti@isolmant.it - www.isolmant.it - www.sistemapavimento.it - www.isolmant4you.it

Isolmant is a TECNASFALTI srl's registered trademark - © TECNASFALTI - All rights reserved - Copying, even partially, is forbidden - In force since October 2022 - This document supersedes and replaces all previous versions.