



ISOLMANT FASCIA PERIMETRALE STACCA/ATTACCA

Perimeter strip for floating systems

WHAT IS ISOLMANT FASCIA PERIMETRALE STACCA/ATTACCA?

15 cm adhesive strips made of Isolmant's physically reticulated, expanded closed-cell polyethylene with "Peel-and-Stick" adhesive.

SPECIFIC APPLICATIONS

Isolmant Fascia Perimetrale Stacca/Attacca: is specific for floating screeds as provided by UNI 11516:2013 standards with any type of slab. In case of disjuncting a floating screed from perimeter walls it is recommended not to turn the resilient layer upside down but to use Isolmant Fascia Perimetrale Stacca/Attacca. Failure to use Isolmant Fascia Perimetrale Stacca/Attacca causes an acoustic bridge that can lead to several decibels reduction.



ADVANTAGES

- Adhesive throughout its height for better positioning.
- Low thickness.
- Inalterable in time.
- Unlimited duration.

ISOLMANT FASCIA PERIMETRALE STACCA/ATTACCA > TECHNICAL SPECIFICATIONS

NOMINAL THICKNESS:	3 mm
CE MARKING:	Harmonised standards for CE marking are NOT currently available for acoustic insulation products. This means that Isolmant products are currently NOT subject to CE marking, nor to the drawing up of a PDO (declaration of performance) or DDP (declaration of performance). All Isolmant products are placed on the market in compliance with the regulations in force in the country of destination and with the necessary certifications to guarantee their use in dedicated applications.
SIZE:	h 15 cm x 100 m linear strips
PACKAGE:	10 elements equal to 200 linear metres



ITEM SPECIFICATIONS

Professional Peel-and-Stick adhesive flanking strip made of reticulated expanded closed-cell polyethylene, featured by 30 kg/m³ density.

A height 15 cm. Nominal thickness 3 mm.

STEP

INSTALLING ISOLMANT FASCIA PERIMETRALE STACCA/ATTACCA

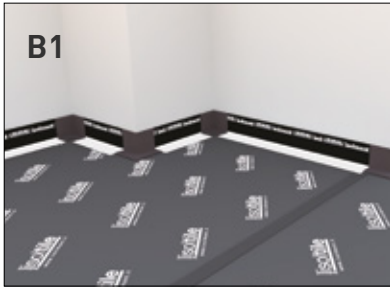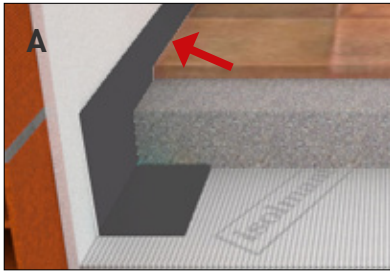

In order to avoid acoustic bridges, the use of Isolmant Fascia Perimetrale Stacca/Attacca is recommended. This product should be installed along the entire perimeter of the room without interruption. After stripping the adhesive, apply this product adhesive to adhere it to the perimeter wall and downwards to the lightened slab/block or resilient layer already laid. The height of the strip must be such as to ensure that it exceeds the floor level by approximately 2/3 cm. This excess must be trimmed only after the flooring has been laid and grouted (fig. 1) The continuity of the installation must also be ensured along the thresholds of entrance doors and French windows, as well as in technical niches for housing the manifolds of the heating system, pillars, pilasters, doors and other wall movements. Specific accessories are available to facilitate this task: Isolmant Angoli e Spigoli and Isolmant Telaio Porte (Fig. 2a -fig. 2b). It is also necessary to avoid gaps between the strip and the walls at the corners (Fig. 3) where cementitious material can penetrate. It is also necessary to that the perimeter strip also adheres continuously along the slab-wall connection: the formation of the groove (fig. 4) causes a reduction in the thickness of the screed resulting in a lack of flooring support at that point, risking cracking over time. In conclusion, before proceeding with the laying of the finishing screed, the contractor must be reasonably certain that he has created a perfect watertight tank in which the cement screed he is going to lay can float without establishing any rigid connection either with the load-bearing layers underneath or with the walls to its sides.



WARNINGS:

* This data sheet does not constitute a specification and, if it consists of several pages, please ensure that you have consulted the complete document. Although, these instructions are the result of our best expertise they are indicative. The user should establish whether the product is suitable for its intended application. The user will be also in charge of all the responsibility for the use of the product itself.

**The sound insulation values given in this technical data sheet are the result of laboratory tests or tests carried out on site: they cannot be considered a predictive value for every situation that may occur on site. Acoustic performance is closely linked to the specific conditions of each site.

***Caution: do not expose the product to direct sunlight and bad weather.



Via dell'Industria 12, Località Francolino 20074 Carpiano (Mi) Tel. +39 02 9885701 Fax +39 02 98855702
clienti@isolmant.it - www.isolmant.it - www.sistemapavimento.it - www.isolmant4you.it

Isolmant is a TECNASFALTI srl's registered trademark - © TECNASFALTI - All rights reserved - Copying, even partially, is forbidden - In force since October 2022 - This document supersedes and replaces all previous versions.