



ISOLMANT NASTRO TELATO

UNDERSCREED INSULATION - ACCESSORY

SPECIFIC FOR TAPING UNDERLAY SHEETS TOGETHER, IDEAL FOR LOW THICKNESS SCREED.

WHAT IS ISOLMANT NASTRO TELATO?

Isolmant Nastro telato is a 5 cm a high-strength adhesive tape. This product is suitable for jointing Isolmant sheets together (all under-screed range).

SPECIFIC APPLICATIONS

Isolmant Nastro Telato specific for floating screeds as provided by UNI 11516:2013 standards with any type of slab. It is ideal for sealing the sheets of the Isolmant underlay range together (especially if they do not have adhesive overlaps), thus preventing the passage of moisture and the formation of acoustic bridges that would occur if the sheets were not properly sealed together.

ADVANTAGES


- High tear resistance.
- Very low thickness.
- Inalterable over time.
- Unlimited durability.

NOMINAL THICKNESS:	< 1 mm
SIZE:	Rolls of 5 cm x 25 m linear
PACKAGE:	Single roll
CE MARKING:	Harmonised standards for CE marking are NOT currently available for acoustic insulation products. This means that Isolmant products are currently NOT subject to CE marking, nor to the drawing up of a PDO (declaration of performance) or DDP (declaration of performance). All Isolmant products are placed on the market in compliance with the regulations in force in the country of destination and with the necessary certifications to guarantee their use in dedicated applications.

ITEM SPECIFICATIONS

Isolmant Fascia Nastro is used to tape and seal Isolmant sheets. H 5 cm. Nominal thickness < 1 mm.

ISOLMANT FASCIA NASTRO INSTALLATION

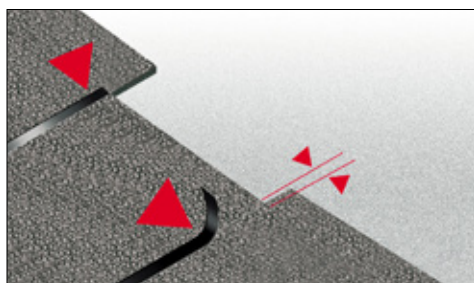

1

Installing Isolmant Nastro Telato. Isolmant underlay range sheet must form a uniform and continuous layer in order to ensure the correct functioning of the floating screed system. If the sheets do not have adhesive overlaps to seal them with Isolmant Nastro Telato.

WARNINGS:

* This data sheet does not constitute a specification and, if it consists of several pages, please ensure that you have consulted the complete document. Although, these instructions are the result of our best expertise they are indicative. The user should establish whether the product is suitable for its intended application. The user will also be in charge of all the responsibility for the use of the product itself.

*The sound insulation values given in this technical data sheet are the result of laboratory tests or tests carried out on site: they cannot be considered a predictive value for every situation that may occur on site. Acoustic performance is closely linked to the specific conditions of each site.

***Caution: Do not expose the product to direct sunlight.

isolmant



Via dell'Industria 12, Località Francolino 20074 Carpiano (Mi) Tel. +39 02 9885701 Fax +39 02 98855702
clienti@isolmant.it - www.isolmant.it - www.sistemapavimento.it - www.isolmant4you.it

Isolmant is a TECNASFALTI srl's registered trademark - © TECNASFALTI - All rights reserved - Copying, even partially, is forbidden - In force since November 2020 - This document supersedes and replaces all previous versions.