

# ISOLMANT **ANGOLO E SPIGOLO**

## UNDERSCREED INSULATION - ACCESSORY

### ACOUSTIC INSULATION ACCESSORIES FOR APPLICATION IN CORNERS AND EDGES

#### WHAT IS ISOLMANT ANGOLO E SPIGOLO?

Special accessory in pre-shaped and adhesive polyethylene to be used for corners and edges.

#### SPECIFIC APPLICATIONS

Isolmant Angolo e Spigolo: is specific for floating screeds as provided by UNI 11516:2013 standards with any type of slab. This product easily ensures continuity of the perimeter strip at corners and edges of walls.

#### ADVANTAGES


- Adhesive product for easy positioning.
- Suitable in combination with all the perimeter strips of the Isolmant range.
- Preformed to size.
- Great practicality and ease of installation
- Inalterable over time.
- Unlimited duration.

NOMINAL THICKNESS:	5 mm
CORNER/EDGE DIMENSION:	Base approx. 5 cm / Height approx. 10 cm
CE MARKING:	Harmonised standards for CE marking are NOT currently available for acoustic insulation products. This means that Isolmant products are currently NOT subject to CE marking, nor to the drawing up of a PDO (declaration of performance) or DDP (declaration of performance). All Isolmant products are placed on the market in compliance with the regulations in force in the country of destination and with the necessary certifications to guarantee their use in dedicated applications.
PACKAGE:	50 pieces box

## ITEM SPECIFICATIONS

Adhesive polyethylene triangle, preformed in the shape of a corner or edge with dimensions of approximately 5 cm base and 10 cm height, to guarantee the continuity of the flanking strip at corners and edges. 5 mm nominal thickness.

## ISOLMANT ANGOLO E SPIGOLO INSTALLATION

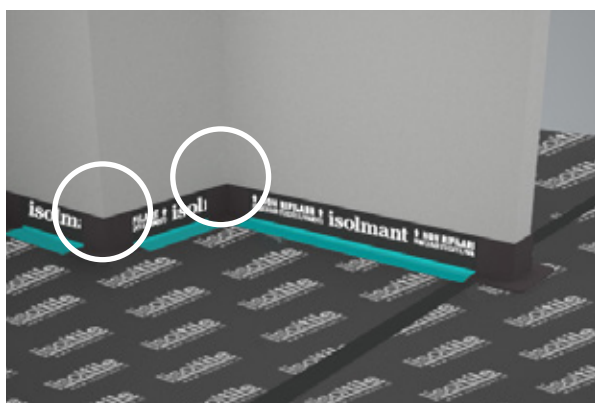

1

**Installing Isolmant Angolo e Spigolo.** In case of pillars, doors and other movements of the walls, any Isolmant Fascia Perimetrale flanking strip must be shaped without interruption to follow faithfully the perimeter of the premises. In order to make the installation of the aforementioned strip easier, faster and more effective, avoiding cutting and bending operations in correspondence with closed corners (concave) or edges (open convex corners), we recommend the installation of Isolmant Angolo e Spigolo, already preformed and adhesive.

### WARNINGS:

\*This data sheet does not constitute a specification and, if it consists of several pages, please ensure that you have consulted the complete document. Although these instructions are the result of our best expertise they are indicative. The user should establish whether the product is suitable for its intended application. The user will be also in charge of all the responsibility for the use of the product itself.

\*\*The sound insulation values given in this technical data sheet are the result of laboratory tests or tests carried out on site: they cannot be considered a predictive value for every situation that may occur on site. Acoustic performance is closely linked to the specific conditions of each site.

\*\*\*Caution: do not expose the product to direct sunlight.

# isolmant



Via dell'Industria 12, Località Francolino 20074 Carpiano (Mi) Tel. +39 02 9885701 Fax +39 02 98855702  
clienti@isolmant.it - [www.isolmant.it](http://www.isolmant.it) - [www.sistemapavimento.it](http://www.sistemapavimento.it) - [www.isolmant4you.it](http://www.isolmant4you.it)

Isolmant is a TECNASFALTI srl's registered trademark - © TECNASFALTI - All rights reserved - Copying, even partially, is forbidden - In force since November 2020 - This document supersedes and replaces all previous versions.