



# CONSTRUCTION PRICE LIST

Updated 1<sup>st</sup> of April 2026

## **NOTE TO THE PRICE LIST**

Due to the unstable market situation caused by the increase in raw material costs, energy costs, and incidental production and transport costs, the price list may change at any time during the year, even for just one or a few products.

The company will immediately notify the customer by e-mail, and **the entry into force of the new price(s) will take effect immediately upon notification.**

The date of the last update can be found on the cover of the **Construction Price List**, which can always be downloaded in its most up-to-date version from [isolmant.it](http://isolmant.it).



# Sound no longer makes noise.



We believe that the quality of our living environment starts with acoustic well-being, which is why, since 1976, we have been combining quality, innovation and expertise

to improve the quality of people's lives in all areas of their everyday surroundings. With Isolmant sound no longer makes noise because, thanks to our solutions, you are both

protected from external noise and free to express yourself and fully enjoy your surroundings. **Isolmant: a world of acoustic comfort.**

**ISOLMANT**  
A world of acoustic **comfort**

# Contents

Let's build our Green Planet	6
A 360° protocol	7
Isolmant is guaranteed sustainability	8
The Green Generation project	9
Isolmant e i CAM	10
Remade	11

## IMPACT NOISE

<b>Under screed insulation</b>	11
Isolmant Special	14
Isolmant Special Plus	15
Isolmant UnderPlus Black.E	16
Isolmant UnderPlus Black.E Radiante BV	17
Isolmant UnderSpecial Classic	18
Isolmant UnderSpecial Radiante BV	19
Isolmant UnderSpecial BiPlus	19
Isolmant Special Fossil Free	20
Isolmant UnderSpecial Fossil Free	21
Isolmant UnderSpecial Biplus Fossil Free	21
Isolmant Super Biplus	22
Isolmant D311	22
Isolmant Fibra HD	23
<b>Under screed and underfloor insulation</b>	
Isolmant IsolTile Classic	24
Isolmant IsolTile AD	25
Isolmant IsolTile BV	25
<b>Underfloor insulation</b>	
Isolmant 3mm Parquet	26
Isolmant Parquet Film	26
Isolmant Special 2 mm Fossil Free	27
Isolmant Top	28
Isolmant Top Incollapavimento	28
Isolmant 200 BV	29
Isolmant Cover	29
Isolmant Cover Plus	29
<b>Stairwell insulation</b>	
Isolmant Stairwell Kit	30
<b>Under screed and underfloor insulation - Accessories</b>	
Isolmant Fascia Perimetrale Pratica	32
Isolmant Fascia Perimetrale Stacca/Attacca	32
Isolmant Fascia Perimetrale Tecnica Reticolata	32
Isolmant Fascia Perimetrale Tecnica Doppio Spessore	33
Isolmant Fascia Perimetrale Tecnica Radiante	33

Isolmant Fascia Nastro	34
Isolmant Nastro Telato	34
Isolmant Nastro Alluminio	34
Isolmant Angolo e Spigolo	35
Isolmant Telaio Porte	35

## AIRBORNE NOISE

### Cavity wall insulation

Isolmant Polimuro	37
Isolmant Perfetto Special	37
Isolmant Perfetto TR	38
Isolmant Fascia Tagliamuro Standard/Strong	39

### The isolmant4you dry system

40

### Wall insulation with direct cladding or counter-wall on framework

IsolGypsum Special Super Green	41
IsolGypsum Special	42-43
IsolGypsum Perfetto	44-45
IsolGypsum Telogomma	46-47
IsolGypsum Duo	48-49
Isolmant Incollafacile	50
Isolmant Fascia Tagliamuro IsolGypsum	50

### Plasterboard wall and counter-wall insulation

Isolmant Perfetto CG	51
Isolmant Polifibre Bloccarumore	51
Isolmant Setto Acustico Fibra	52
Isolmant Setto Acustico CG	53

## MASSIVE PRODUCTS

Isolmant Telogomma Classic	55
Isolmant Telogomma E+45	56
Isolmant Telogomma Plus	56
Isolmant Cemento Armato	57
Isolmant Damp	57
Isolmant Strong	58

### Bonding and cutting

59

### Transport conditions

60

# LET'S BUILD OUR GREEN PLANET

For Isolmant, sustainability is an everyday commitment. A vision of the future constructed through our actions in the present. A path that we have undertaken and that we travel day after day with a greater sense of responsibility and an awareness that this journey is just as important as our destination.

## RESEARCH & DEVELOPMENT

Isolmant's Research & Development department works every day with two important priorities: the sustainability of its solutions and the well-being of people who live in with them. With this in mind, new products are designed and existing ones in the range are improved. Daily research that not only focuses on new technologies but also anticipates them, thanks to constant collaboration with major Italian universities and Italian and European research institutes. Isolmant's technicians, committed to researching tomorrow's products, also work in the field on a daily basis on the products of today, alongside the designer, the company or the end customer, to help them make the most suitable choice for their needs. A complete service for optimal construction.

Isolmant solutions comply with the Green Planet philosophy with products that respect people and the environment:

- Sustainable
- Ecological
- Recyclable
- Environmentally-friendly production
- Reduced energy consumption
- Waste reduction



ECOLOGICAL



SUSTAINABLE



NON-TOXIC



HEALTHY

# A 360° PROTOCOL



## PRODUCT AND PROCESS SUSTAINABILITY

All Research & Development actions are aimed at improving, updating, certifying and innovating our products and our offer to the market



## ENVIRONMENTAL SUSTAINABILITY

All actions undertaken are aimed at reducing our corporate ecological footprint and decreasing CO<sub>2</sub> emissions



## CORPORATE RESPONSIBILITY

All business choices comply with the principles of responsibility and transparency in business management, choice of suppliers and customer relations



## SOCIAL RESPONSIBILITY

All choices to support local entities, our approach to corporate welfare and the dissemination of our know-how on the market



# ISOLMANT IS GUARANTEED SUSTAINABILITY

All Isolmant Research & Development activities are aimed at improving, updating, certifying and innovating the range of products and solutions we bring to the market.

The characteristics of our products are periodically tested to ensure high technical and hygiene characteristics, as well as the highest levels of performance.



All our products bearing the “Guaranteed Green Planet” label are certified and comply with the sustainability criteria of the most important environmental protocols, and are certified according to the highest national and international standards.

## OUR PRODUCT CERTIFICATION

### QUALITY CERTIFICATIONS

- Acoustic Certification
- Flame resistance certification
- Reflected Walking Sound (RWS)
- Thermal Resistance

### HEALTH CERTIFICATIONS

- VOC
- Blue Angel
- Indoor Air Comfort Gold

### SUSTAINABILITY CERTIFICATIONS

- Recycled content certificates
- ISCC PLUS

## LEARN MORE ABOUT OUR CERTIFICATIONS



REMADE is the product certification accredited in Italy and Europe for the verification of the content of recycled material (and by-products).

The certification attests the traceability of the production itself within the production chain, starting from the verification of the origin of the incoming raw materials, up to the certified finished product. Companies whose production takes place exclusively in Italy can request the ReMade in Italy brand.



Indoor Air Comfort Gold certifies the lowest VOC emissions in the category to guarantee best indoor air quality, ensuring product compliance with EU specifications, criteria established by the most relevant eco-labels and international sustainable building certifications such as LEED, BREEAM etc.



The German Blue Angel ecolabel has been among the most recognized product certifications in Europe since 1978. It defines strict standards for the selection of products with demanding requirements in terms of sustainability and performance.



# THE GREEN GENERATION PROJECT

With the Green Generation project, Isolmant Research & Development has researched and developed a unique bio-based reticulated polyurethane foam specifically for soundproofing and thermal insulation. **Isolmant Serie R Fossil Free** is the first polymer-based product made without fossil resources that simultaneously maintains the high technical and performance characteristics of all Isolmant products. If the entire Isolmant range has the sustainability characteristics demanded by the current market, **Isolmant Serie R Fossil Free** goes further by anticipating the needs of the future.



## THE PRINCIPLES OF THE PROJECT

- **Continuous research on raw materials:**  
use of cutting-edge raw materials and alternatives to fossil fuels as envisaged by the 2030 Agenda for Sustainable Development;
- **Optimization of the raw material supply chain:**  
soil protection, use of renewable sources, recovery of raw material without deforestation and not in competition with food crops;
- **Sustainable supply chain:**  
local sourcing, certification of raw materials, processes and products;
- **Reduced harmful emissions:**  
reduction of CO<sub>2</sub> and non-renewable energy consumption.

## CERTIFIED SUSTAINABLE PRODUCTION



ISCC is a leading global certification system that seeks to contribute to the implementation of the environmentally, socially and economically sustainable production and use of all types of biomass in global supply chains.

ISCC certification confirms the highest sustainability requirements for Isolmant's production, logistics and distribution chain by certifying the entire supply chain to guarantee the sustainable sourcing of raw materials from non-fossil sources.



**FIND OUT MORE**  
about the Green  
Generation project  
by visiting our website

**DOWNLOAD** the  
project brochure

The certification attests to the traceability of production within the supply chain, from verifying the origin of incoming raw materials to the certified finished product, becoming a tool for transparency and simplification for Green Public Procurement and the private market. Certified products guarantee the recycled content of materials and products to public administrations. The certification operates under the accredited authority of ACCREDIA, guaranteeing independence and transparency, and is expressly recognized in the Italian CAM (Minimum Environmental Criteria) and admitted in public tenders.

## REMADE CERTIFICATION FOR ISOLMANT PRODUCTS


**N.b.** 50% is the minimum percentage required by the Italian CAM for polyester fiber.

### Example of a single-component product made of polyester fiber:

In the case of a product made with a single raw material, the percentage of recycled content is unequivocal.

This is the case, for example, of Isolmant Fibra HD, whose raw material is made up of 100% polyester fiber, 60% of which comes from recycled material. cui il 60% proveniente da materiale di riciclo.

### ISOLMANT FIBRA HD

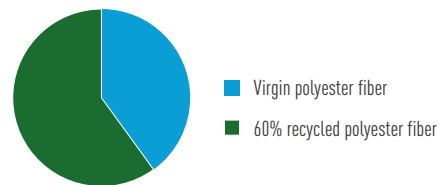


### Multicomponent product where one material is polyester fiber:

In the case of a product made with two raw materials of which one is listed and one is not, the requirement to comply with a minimum percentage of recycled content applies exclusively to the listed raw material.

This is the case, for example, with Isolmant UnderSpecial (a combination of polyethylene and polyester fiber), which has two percentages of recycled content: the recycled content for the polyester fiber alone, equal to 62%, well above the 50% limit imposed by the CAM, and the reweighed percentage in the finished product, which is equal to 35%.

### ISOLMANT UNDERSPECIAL CLASSIC

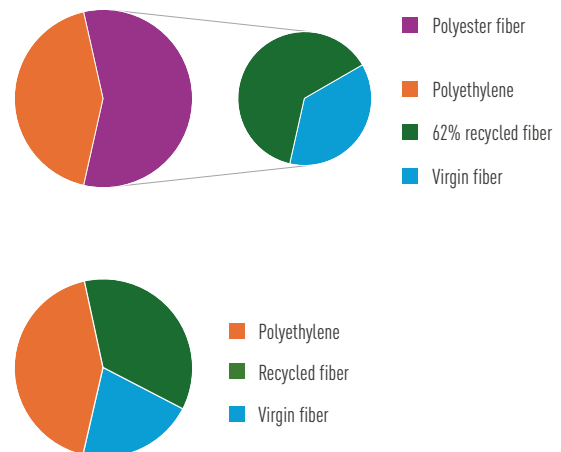

**UnderSpecial Classic is REMADE IN ITALY certified (1)**, product certification, under ACCREDIA accreditation, which attests to the recycled content in the product.

This certification is accepted during the tender and award phase, in accordance with the provisions of the public procurement regulations and the CAM.

RECYCLED CONTENT CERTIFICATE REMADE UNDERSPECIAL CLASSIC 10 mm N° IT335452 Issued on 03/09/2024			
Raw material	% of raw material in the product	""% of recycled content in 1 kg of raw material""	""% of recycled content in the finished product""
FIBTEC XF1-22	57%	62%*	35%
SPECIAL	43%	0%**	



On page 2 of the technical data sheet for each product with recycled content, there is an explanatory table highlighting the requirements (recycled in polyester fiber, FIBTEC) required by the Italian CAM Edilizia.





IMPACT  
**NOISE**



For years now, the Isolmant brand has promoted the "Sistema Pavimento" concept, literal translation in Italian of "flooring system", the set of all the elements that compose the stratigraphy of a horizontal partition, from the suspended ceiling to the final floor.

**The physical performances: acoustic, mechanical, thermal of the package are determined by all the elements interacting with one another."** which is based on the premise that the system concept should be the foundation for any new construction activity or renovation. Isolmant was undoubtedly a forerunner with respect to the "Sistema Pavimento" concept, which is now well established.


In the case of acoustic insulation, underfloor insulation is not enough: what is required is a "Sistema Pavimento" within which every element of the structure works in unison to achieve the desired result. In this system, the insulation, which can be inserted either under the screed (underscreed solutions) or under the finish (underfloor solutions), plays a central role with respect to the requirements of the customer, who not only demand compliance with the limits established by the regulations but, above all, the possibility of living in a comfortable environment.

**Over the years the layering of slabs, screed and floors has become increasingly complex due to various factors, such as the spread of underfloor heating systems, advancements in terms of finishes, which are increasingly thinner and larger in size, and changes in construction sites, which demand high-level performances in increasingly smaller spaces.**

In this scenario, talking about the "Sistema Pavimento" has forced all players in the supply chain to work together to create a system that is effective from all points of view: not only in terms of performance, but also in terms of durability, effectiveness, and resistance.

**As regards the Isolmant Flooring System, the solutions for insulating horizontal partitions fall into two categories: SOLUTIONS FOR UNDERSCREED ACOUSTIC INSULATION and SOLUTIONS FOR UNDERFLOOR ACOUSTIC INSULATION.**

On the [sistemapavimento.it](http://sistemapavimento.it) website you can find all the work that Isolmant has done in recent years with the major companies of the sector. Work and experience that materialize in specific packages tested and certified for the insulation of horizontal structures, both under the screed and under the flooring. A continuously updated "archive" created to be a daily work tool for designers and businesses.

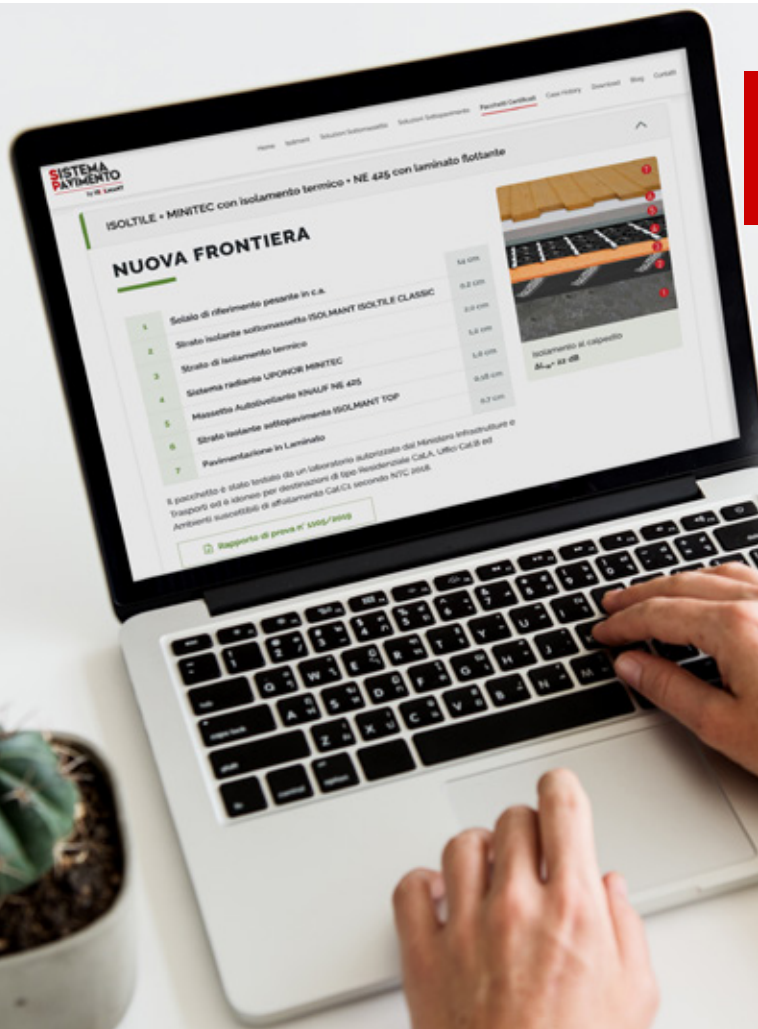

**DISCOVER ALL  
THE PACKAGES ON  
SISTEMAPAVIMENTO.IT**

# THE SPECIAL LINE

Timeless classic of the Isolmant underscreed range, specifically for horizontal structures with screed thickness of > 4 cm.

## HIGH-PERFORMANCE AND SUSTAINABLE

Isolmant Special is the classic product of the Isolmant underscreed range, distinctive for its iconic silver color and embossed with the brand's silkscreen print on the side to be installed in view.

A high-performance product available in four thicknesses: 3, 5, 10 and 15 mm, for every construction requirement. The second generation Isolmant Special is now even more high-performance with excellent sustainability characteristics: in addition to being VOC A+, it has been awarded the German Blue Angel ecolabel, guarantee of the eco-sustainable criteria with which the product was made. Isolmant Special meets the sustainability criteria of major environmental protocols: MEC, ITACA, WELL, BREEAM, LEED.

## FIBER-REINFORCED VERSION

Isolmant Special is also available in the PLUS version, coupled with a special fiber-reinforced fabric that protects the resilient layer: ideal for application in "difficult" worksites where greater resistance to foot traffic and tearing is required.

## ISOLMANT SPECIAL

THE CLASSIC UNDERFLOOR SOUNDPROOFING PRODUCT, NOW UPGRADED FOR EVEN BETTER PERFORMANCE.



Second-generation Isolmant Special resilient polyethylene layer embossed and silk-screen printed on the upper side, characterized by the improved and calibrated quality of the polyethylene cells. It guarantees consistent performance over time thanks to its intrinsic quality and physical characteristics.

To be installed with the embossed and screen-printed side upward.

✂️ Nominal thickness: 3 - 5 - 10 - 15 mm

The 10- and 15-mm thicknesses are equipped with ledge.



[www.blauer-engel.de/uz156](http://www.blauer-engel.de/uz156)

For more information visit the product page



CODE	Description	Roll Size	Pack	€/m <sup>2</sup>
ISOL03NS	Isolmant Special 3 mm	1.50 m x 50 m	75 m <sup>2</sup> (1 roll)	4.80
ISOL05NS50	Isolmant Special 5 mm	1.50 m x 50 m	75 m <sup>2</sup> (1 roll)	8.10
ISOL10NS	Isolmant Special 10 mm	1.50 m x 50 m	75 m <sup>2</sup> (1 roll)	16.80
ISOL15NS	Isolmant Special 15 mm	1.50 m x 30 m	45 m <sup>2</sup> (1 roll)	25.20



## ISOLMANT SPECIAL PLUS

THE FIBER-REINFORCED VERSION OF ISOLMANT SPECIAL, FOR GREATER ON-SITE RESISTANCE.  
SUITABLE FOR APPLICATIONS WHERE SYSTEMS PASS OVER THE MAT.



Resilient layer composed of second-generation Isolmant Special polyethylene, sandwiched on the upper side with FIBTEC XT1 screen-printed fabric. This fiber-reinforced layer with an anti-tear function makes it particularly suitable for applications where systems pass over the mat, or in all cases where greater resistance to foot traffic and tearing is required.

Product with over lap. To be installed with the fiber-reinforced fabric facing upward.

✂ Nominal thickness: 5 mm

For more information visit the product page



CODE	Description	Roll Size	Pack	€/ m <sup>2</sup>
ISOLSPECIALPLUS	Isolmant Special Plus	1.50 m x 50 m	75 m <sup>2</sup> (1 roll)	12.10

Refers to our web  
sistemapavimento.com  
for certified stratigraphy

# THE UNDERPLUS BLACK.E LINE

## Solutions for under screed sound insulation for structures with screed of reduced thickness ( $\geq 3$ cm)

Isolmant UnderPlus Black.E is the laminate with the best price-performance ratio among under screed acoustic insulation solutions.

Thanks to its technical characteristics, it can also be successfully used in structures with reduced screed thickness (between 3 and 5 cm).

It does not contain any volatile substances (Indoor Air Comfort Gold), is environmentally friendly and recyclable, and complies with the requirements defined by Construction MEC for soundproofing and thermal insulation materials with regard to the demand for high soundproofing performance, the percentage of recycled material and the absence of hazardous substances.

**New:** now also available in the Radiante BV version, with aluminum film at the top that provides a vapor barrier in accordance with the law ( $S_d > 100$  m).

### ISOLMANT UNDERPLUS BLACK.E


THE UNDER SCREED SOLUTION WITH THE BEST QUALITY-PRICE RATIO, ALSO IDEAL FOR STRUCTURES WITH REDUCED SCREED THICKNESS ( $\geq 3$  cm).



Resilient layer consisting of Isolmant polyethylene sandwiched on the underside with FIBTEC XF1 (special needle-punched fiber manufactured to calibrated specifications for improved soundproofing). It provides good insulation against impact noise and airborne noise for horizontal partitions.

Product with over lap. To be installed with the fiber facing downwards.


 Nominal thickness: 7 mm

For more information visit the product page 



CODE	Description	Size	Pack	€/m <sup>2</sup>
UNDERPLUSBL.E	Isolmant UnderPlus Black.E	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	9.55
UNDERPLUSBL.EM	Isolmant UnderPlus Black.E	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	9.75

Available upon request in Euroclass B<sub>fl</sub>-s1 with quotation to be requested at [export@isolmant.it](mailto:export@isolmant.it)

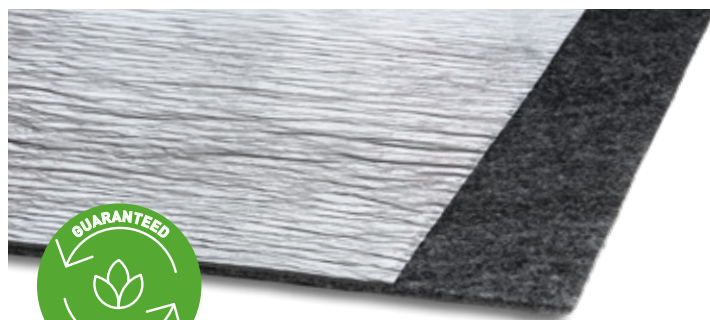

## ISOLMANT UNDERPLUS BLACK.E RADIANTE BV

THE VERSION OF UNDERPLUS BLACK.E SPECIFICALLY FOR RADIANT SYSTEMS, WITH REFLECTIVE ALUMINUM FILM THAT ACTS AS A VAPOR BARRIER.

UnderPlus Black.E coupled on the top side with a specific reflective film with vapor barrier function. Particularly suitable also for installations with reduced screed thicknesses, in the presence of an underfloor heating or cooling system or where a vapor barrier is required ( $S_d > 100$  m).

**Product with over lap. To be installed with the fiber facing downwards.**

✂️ **Nominal thickness: 7 mm**

For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
UNPLUSRADIANTE	Isolmant UnderPlus Radiante	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	13.20
UNPLUSRADIANTEM	Isolmant UnderPlus Radiante	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	13.45

Refers to our web  
sistemapavimento.com  
for certified stratigraphy

# THE ISOLMANT UNDERSPECIAL LINE

Under screed soundproofing solutions for structures with traditional screed ( $\geq 5$  cm)

## IMPROVED VERSION

Isolmant's Research & Development Department has created a new version of UnderSpecial, which now comes with improved technical characteristics thanks mainly to the presence of the new FIBTEC XF3 fiber. The denier rating and compound of the special second generation needle-punched fiber has been improved for even more consistent performance over time.

## COMPLETE LINE

For easier identification of the right product for every construction site need, UnderSpecial becomes a genuine range with three specific solutions:

- **Isolmant UnderSpecial Classic:** the classic version, but with something extra
- **Isolmant UnderSpecial Radiante BV:** coated with reflective film, specifically for under screed soundproofing in the presence of underfloor heating systems (formerly Isolmant Radiante)
- **Isolmant UnderSpecial BiPlus:** coated with fiber-reinforced fabric, ideal for single-layer structures and/or where greater resistance is required (formerly Isolmant BiPlus)

## ISOLMANT ( BEST-SELLING EVER ) UNDERSPECIAL CLASSIC

THE HIGH-END PRODUCT FOR UNDER SCREED SOUNDPROOFING. HIGH PERFORMANCE AND GUARANTEED EFFICIENCY. NOW WITH NEW FIBTEC FIBRE XF3 ENHANCED COMPOSITION FOR EVEN HIGHER LEVELS OF PERFORMANCE.



High-end resilient layer consisting of Isolmant Special polyethylene coupled on the underside with FIBTEC XF3 (special second-generation needle-punched fiber, manufactured to calibrated specifications for improved noise reduction). Ledged for easy installation.

Product with over lap. To be installed with the fiber facing downwards.

➤ Nominal thickness: 10 - 15 mm



For more information visit the product page




CODE	Description	Size	Pack	€/ m <sup>2</sup>
UNDERSPECIAL	Isolmant UnderSpecial Classic 10 mm	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	13.45
UNDERSPECIALM	Isolmant UnderSpecial Classic 10 mm	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	13.65
UNDERSPECIALA	Isolmant UnderSpecial Classic 15 mm	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	21.95

Also available on request in Euroclass B<sub>n</sub>-s1 version with quotation to be requested to the Customer Office.



## ISOLMANT UNDERSPECIAL RADIANTE BV

THE HIGH-END PRODUCT, SPECIFICALLY FOR RADIANT SYSTEMS, WITH REFLECTIVE ALUMINUM FILM ACTING AS VAPOR BARRIER.

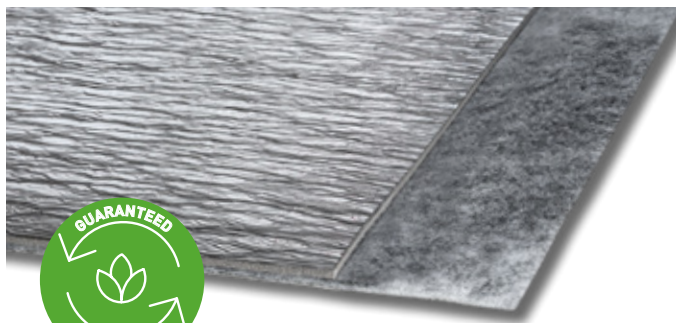

Isolmant UnderSpecial coupled on the top side with a specific reflective film with vapor barrier function. Particularly suitable for installations in the presence of an underfloor heating or cooling system or where a vapor barrier is required ( $S_d > 100$  m).

Product with over lap. To be installed with the fiber facing downwards.

✂ Nominal thickness: 10 mm




For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
UNDSPECRADIANT	Isolmant UnderSpecial Radiante	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	17.10
UNDSPECRADIANTM	Isolmant UnderSpecial Radiante	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	17.30

## ISOLMANT UNDERSPECIAL BIPLUS

THE FIBER-REINFORCED VERSION OF ISOLMANT UNDERSPECIAL, FOR ADDED STRENGTH ON THE CONSTRUCTION SITE.

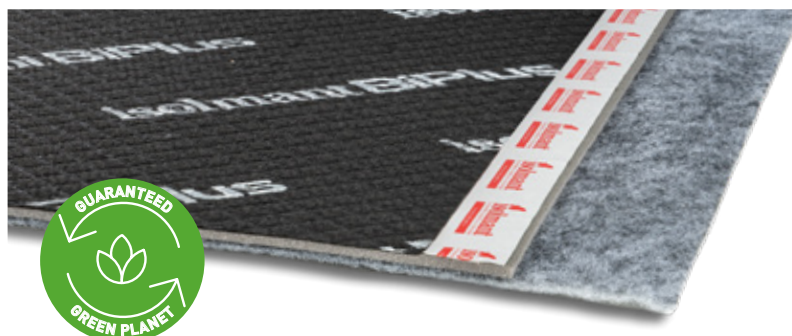

Isolmant UnderSpecial coupled on the top side with FIBTEC XT1 (FIBER-REINFORCED screen-printed fabric). The fiber-reinforced top layer with anti-tear function makes it particularly suitable for application where systems pass over the mat, or in all cases where greater resistance to foot traffic and tearing is required.

Product with over lap. To be installed with the fiber facing downwards.

✂ Nominal thickness: 11 - 16 mm



For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
UNDSPECBPLUS	Isolmant UnderSpecial Biplus 11 mm	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	17.70
UNDSPECBPLUSM	Isolmant UnderSpecial Biplus 11 mm	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	17.90
UNDSPECBPLUSA	Isolmant UnderSpecial Biplus 16 mm	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	26.20

Refers to our web [sistemapavimento.com](http://sistemapavimento.com) for certified stratigraphy

# THE ISOLMANT FOSSIL FREE LINE

Solutions with Isolmant Special Fossil Free from non-fossil renewable sources.

Isolmant Serie R Fossil Free is the newest and only Isolmant polyethylene made from non-fossil derived raw materials. Our unique Isolmant Serie R Fossil Free polyethylene is made by using processing residues from other production chains that would otherwise have to be disposed of without recreating value. By optimizing production processes, it is thus possible to recover useful waste that is transformed into valuable materials without deforestation and without using products intended for the food industry. These processing residues are then subjected to a normal polymerization process to achieve a "natural" plastic material, i.e. deriving from renewable raw materials of non-fossil origin.

**The result is a range of products that maintain the same technical, performance and durability qualities as their respective fossil-based products.**

Isolmant Serie R Fossil Free is ISCC PLUS certified, a world-leading certification system that confirms the highest sustainability requirements for Isolmant's production, logistics and distribution chain. **All Fossil Free products contribute to obtaining credits for the most stringent environmental certifications (CAM, LEED, ITACA, BREEAM...).**



Learn about the other two products made with Isolmant Serie R Fossil Free:

- **Isolmant Special 2 mm Fossil Free** (Page 25)
- **IsolGypsum Special Super Green** (Page 39)



## ISOLMANT SPECIAL FOSSIL FREE

ISOLMANT SPECIAL FROM RENEWABLE SOURCES, FOR UNDER SCREED SOUNDPROOFING.



Isolmant Special Serie R Fossil Free fully sustainable and renewably sourced polyethylene resilient layer, which is green in color, embossed and screen-printed on the top side, featuring improved and calibrated polyethylene cell quality.

Its sustainable characteristics are guaranteed by the international ISCC PLUS certification.

This ensures very high standards of accountability and sustainable development, not only of the product, but also of the entire supply chain, and helps achieve credits for the most stringent environmental certifications (CAM, LEED, ITACA, BREEAM, etc.).

**To be installed with the embossed and screen-printed side upward.**

✂️ **Nominal thickness: 5 - 10 - 15 mm**

For more information visit the product page



CODE	Description	Size	Pack	€/ m <sup>2</sup>
ISOL05NS50R	Isolmant Special 5 mm Serie R	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	10.25
ISOL10NSR	Isolmant Special 10 mm Serie R	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	21.55
ISOL15NSR	Isolmant Special 15 mm Serie R	1.50 m x 30 m rolls	45 m <sup>2</sup> (1 roll)	32.80





**FOSSIL  
FREE**

## ISOLMANT UNDERSPECIAL FOSSIL FREE

THE TOP-OF-THE-RANGE PRODUCT FOR UNDER SCREED SOUNDPROOFING. HIGH PERFORMANCE AND GUARANTEED EFFECTIVENESS. MADE WITH ISOLMANT SPECIAL SERIE R FROM RENEWABLE SOURCES.

High-end resilient layer consisting of ISCC PLUS-certified Isolmant Special Serie R Fossil Free polyethylene, sandwiched on the underside with FIBTEC XF3 (special second-generation needle-punched fiber, manufactured to calibrated specifications for improved noise reduction). It provides excellent insulation against impact noise and airborne noise for horizontal partitions.

Product with over lap. To be installed with the fiber facing downwards.

✂ Nominal thickness: 10 - 15 mm



For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
UNDERSPECIALR	Isolmant Underspecial Serie R 10 mm	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	16.40
UNDERSPECIALRM	Isolmant Underspecial Serie R 10 mm	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	16.60
UNDERSPECIALRA	Isolmant Underspecial Serie R 15 mm	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	27.70

## ISOLMANT UNDERSPECIAL BIPLUS FOSSIL FREE

THE FIBER-REINFORCED VERSION OF ISOLMANT UNDERSPECIAL BIPLUS SERIE R FOSSIL FREE, FOR ADDED STRENGTH ON THE CONSTRUCTION SITE. MADE WITH ISOLMANT SPECIAL SERIE R FROM RENEWABLE SOURCES.



**FOSSIL  
FREE**

Isolmant UnderSpecial Fossil Free ISCC PLUS certified, coupled on the upper side with FIBTEC XT1, (special FIBER-REINFORCED screen-printed fabric). The fiber-reinforced upper layer with anti-tear function makes it particularly suitable for application in the case of passage of systems above the acoustic mat, or in all cases where greater resistance to walkability and tearing is required. It helps to obtain credits for the most stringent environmental certifications (CAM, LEED, ITACA, BREEAM...).

Product with over lap. To be installed with the fiber facing downwards.

✂ Nominal thickness: 11 - 16 mm




For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
UNDSPECPLUSR	Isolmant UnderSpecial Biplus Serie R 11 mm	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	20.50
UNDSPECPLUSRM	Isolmant UnderSpecial Biplus Serie R 11 mm	1.50 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	20.70
UNDSPECPLUSRA	Isolmant UnderSpecial Biplus Serie R 16 mm	1.50 m x 25 m roll	37.5 m <sup>2</sup> (1 roll)	31.80

# SPECIAL PRODUCTS

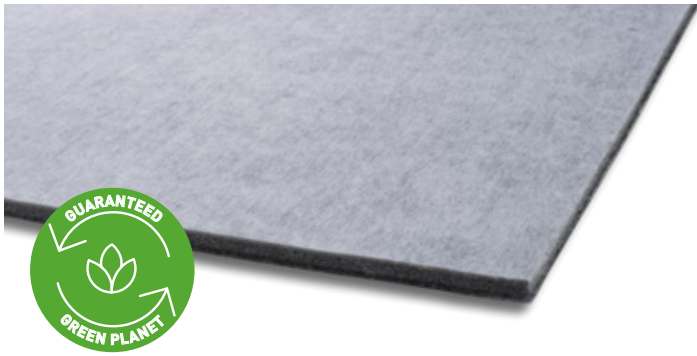

## ISOLMANT SUPER BIPLUS

FOR SOUNDPROOFING OF LIGHT STRUCTURES  
THAT REQUIRE GREATER MASS.

Resilient impact-absorbing layer composed of Isolmant Special sandwiched on the underside with FIBTEC XF1-EL (high-performance elasticized needle-punched fiber) and on the upper side with Isolmant Telogomma (specially calibrated in terms of mass) covered with a layer of TNT. Particularly suitable in lightweight structures, such as wooden floors, it can be used in both single-layer and two-layer solutions.

To be installed with the rubber facing upward.

✂ Nominal thickness: 10 mm




For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
ISOL10SUPBPLUS	Isolmant Super BiPlus 1x10	1 m x 5 m rolls	5 m <sup>2</sup> (1 roll)	26.75

## ISOLMANT D311

FOR SOUNDPROOFING AND THERMAL INSULATION, PARTICULARLY ON PILOTIS SURFACES.

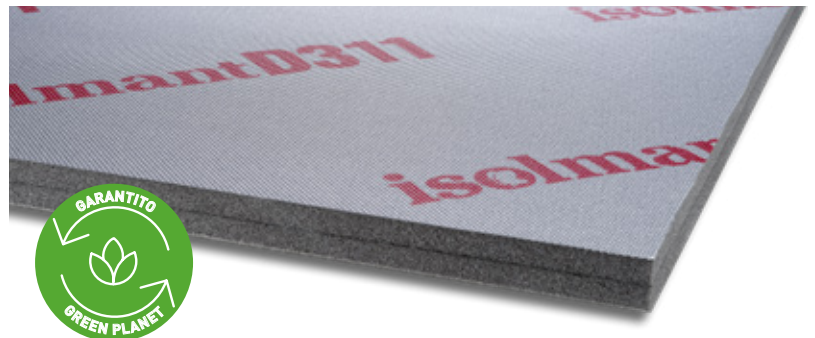

Product composed of Isolmant sandwiched on the top side with an extremely resistant aluminum-coated and embossed film with anti-tear function.

To be installed with the aluminum side facing upward.


✂ Nominal thickness: 22 mm



For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
ISOLD311	Isolmant D311	1 m x 1.50 m panels	15-panel packs (22.5 m <sup>2</sup> )	33.00

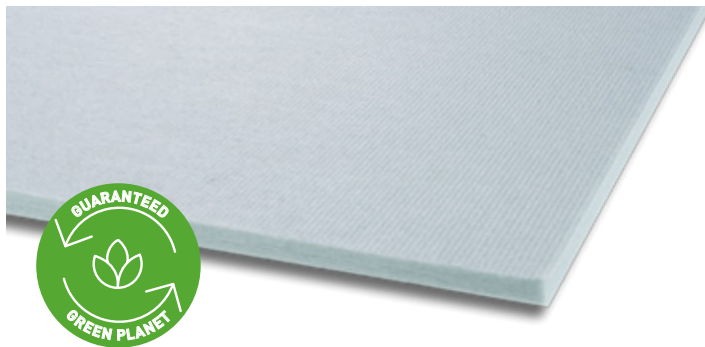

## ISOLMANT FIBRA HD

**FOR SOUNDPROOFING OF DRY STRUCTURES AND/OR IN THE PRESENCE OF LIGHT FLOORS, INCLUDING CAST UNDER SCREEDS.**

Product consisting of a FIBTEC PHD polyester fiber panel (140 kg/m<sup>3</sup>), for soundproofing against impact noise especially in the case of dry finish screeds.


Unlimited durability, non-toxic, environmentally friendly.

✂ **Nominal thickness: 10 mm**

For more information visit the product page




CODE	Description	Size	Pack	€/m <sup>2</sup>
ISOLDRYSCREED10	Isolmant Fibra HD 10 mm thickness	1.0 m x 1.20 m panels	15-panel packs (18 m <sup>2</sup> )	29.20

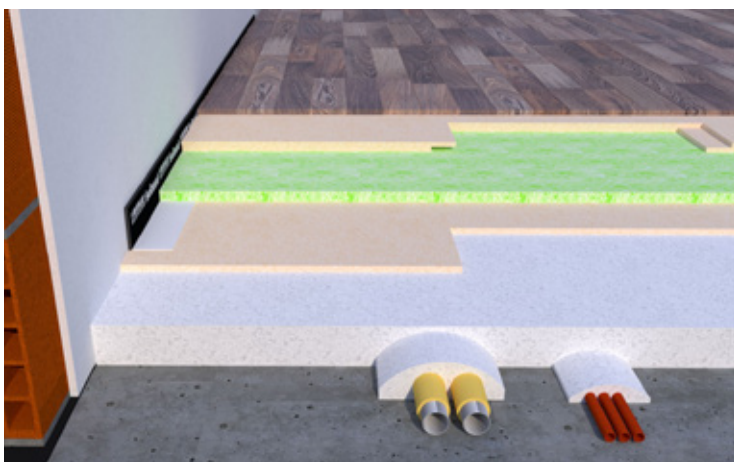

The acoustic and thermal retrofitting of existing slabs is an increasingly common practice in building renovation projects. The easiest way to improve impact noise soundproofing performance is to install "multilayer systems" - low-thickness dry-laid solutions consisting of a resilient layer and a rigid panel on which the floor can be constructed directly - on top of the existing slab.

This type of low-thickness system can significantly increase slab performance and acoustic comfort, while also effectively integrating modern underfloor heating/cooling systems, not only in renovations but also in new construction projects.

For these types of structures Isolmant Fibra HD guarantees excellent sound insulation performance in dry systems with granular substrates and gypsum plasterboards, fiber cement or wood-based panels, but it can also be used with cast screeds.

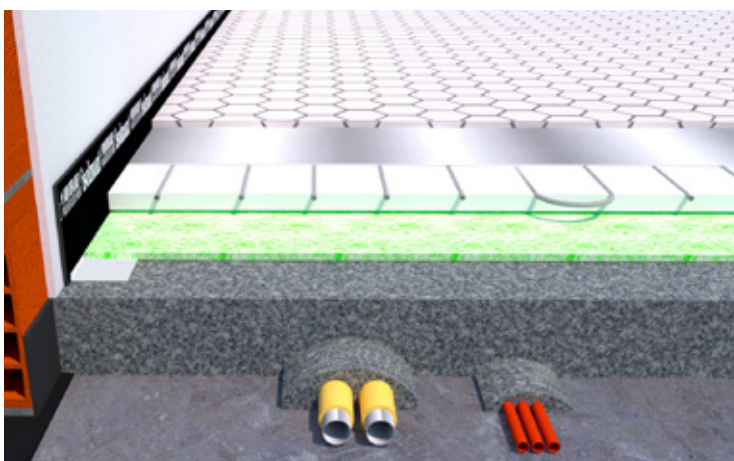

Easy to install and handle, thanks to the handy size of the panels, Isolmant Fibra HD is environmentally friendly, recycled and recyclable, contains no volatile substances (VOC A+ certified) and complies with the requirements defconstruction MEC for soundproofing and thermal insulation materials with regard to the demand for high soundproofing performance, the percentage of recycled material and the absence of hazardous substances.

Refers to our web [sistemapavimento.com](http://sistemapavimento.com) for certified stratigraphy



# THE ISOLTILE LINE

Innovative solutions for acoustic insulation under screed and under flooring. Today with a new look for greater worksite recognisability!

Isolmant IsolTile is a 2 mm concentration of technology: an elastodynamic, isolating and reinforcing resilient acoustic layer designed for under screed and underfloor applications (both ceramic and parquet).

All versions of IsolTile (Classic, BV and AD) are presented with the side to be laid exposed screen-printed with the recognizable IsolTile brand, while **the lower side differs in the three versions: total black for IsolTile Classic, silver for IsolTile BV with vapor barrier and adhesive for IsolTile AD. A restyling of the range that makes it even more recognizable on site and easy to install.**

In particular, IsolTile is generally applied, depending on the version chosen, in the following structures:

## UNDER SCREED APPLICATION

Application under thin screeds  $\leq 3$  cm (with or without underfloor heating)

## UNDERFLOOR APPLICATION

- Application under floor - ceramic, stone material, parquet - on screed (with or without underfloor heating)
- Application under floor - ceramic, stone material, parquet - directly on low thickness/low inertia radiant system
- Application under floor - ceramic, stone material, parquet - directly on existing floor

## ISOLMANT ISOLTILE CLASSIC

MATERASSIMO INNOVATIVE TECHNOLOGY SPECIFICALLY FOR UNDERFLOOR AND UNDER SCREED SOUNDPROOFING WITH A VERY THIN SURFACE LAYER (< 3 cm).



New bottom side total black

Isolmant IsolTile Classic consists of high-density, physically reticulated Isolmant polypropylene, coated on both sides with special FIBTEC XP1 (black, screen-printed, calendered polypropylene technical geotextile) and on the bottom side with special FIBTEC XP1B (black polypropylene technical geotextile).

To be installed with the screen-printed side facing up.

✂ Nominal thickness: 2 mm

**STRIPS INCLUDED IN THE PACKAGE**

The package includes:

- 1 joint strip (h 7.5 cm x L 20 m) Code **FADISOLTILE75**
- 2 perimeter strips (h 3 cm x L 10 m) Code **FADISPRM3H3L10**



For more information visit the product page



CODE	Description	Size	Pack	€/ m <sup>2</sup>
ISOL2TILE	IsolTile Classic	1 m x 20 m rolls	20 m <sup>2</sup> (1 roll)	22.00



## ISOLMANT ISOLTILE AD

SPECIFICALLY FOR THE GLUED INSTALLATION  
OF NEW FINISHES ON EXISTING FLOORS.

Adjustable adhesive coating

Isolmant IsolTile AD consists of physically reticulated, high-density Isolmant polypropylene, coated on the top side with special FIBTEC XP1 (technical polypropylene geotextile, black in color, screen-printed and calendered) and on the bottom side with an adhesive positioning layer, specifically for installation on existing flooring.

To be installed with the screen-printed side facing up.

✂ Nominal thickness: 2 mm



STRIPS INCLUDED  
IN THE PACKAGE

The package includes:

- 1 joint strip (h 7.5 cm x L 20 m) Code FADISOLTILE75
- 2 perimeter strips (h 3 cm x L 10 m) Code FADISPRM3H3L10



For more information visit the product page



CODE	Description	Size	Pack	€/ m <sup>2</sup>
ISOL2TILEADSA	IsolTile AD adhesive	1 m x 20 m rolls	20 m <sup>2</sup> (1 roll)	23.00

## ISOLMANT ISOLTILE BV

ALL THE ADVANTAGES OF ISOLTILE WITH  
THE BENEFITS OF AN INTEGRATED VAPOR  
BARRIER.



New bottom side silver  
(barrier against vapour)

Isolmant IsolTile BV is made of HD expanded polypropylene material which is coated on upper side with special FIBTEC XP1 fabric (black screen-printed and calendered polypropylene fabric for technical application) and on the underside with FIBTEC XP2 (silver screen and calendered polypropylene fabric with an integrated protection against vapour -  $S_d > 40$  m).

To be installed with the screen-printed side facing up.

✂ Nominal thickness: 2 mm



STRIPS INCLUDED  
IN THE PACKAGE

The package includes:

- 1 joint strip (h 7.5 cm x L 20 m) Code FADISOLTILE75
- 2 perimeter strips (h 3 cm x L 10 m) Code FADISPRM3H3L10




For more information visit the product page



CODE	Description	Size	Pack	€/ m <sup>2</sup>
ISOL2TILEBV	IsolTile BV	1 m x 20 m rolls	20 m <sup>2</sup> (1 roll)	24.00

Refers to our web  
sistemapavimento.com  
for certified stratigraphy

# UNDERFLOOR PRODUCTS

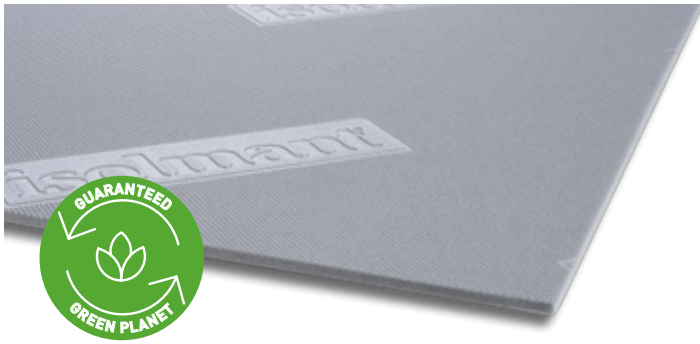


## ISOLMANT 3 mm PARQUET

A CLASSIC FOR THE FLOATING INSTALLATION OF PARQUET AND LAMINATE FLOORING.

Insulating mat made Isolmant Special, embossed and screen-printed on the upper side, specific for the floating installation of laminate floors, parquet and other rigid floors of adequate thickness.

To be installed with the embossed and screen-printed side upward.

 Nominal thickness: 3 mm



For more information visit the product page



CODE	Description	Size	Packaging (pallet)	€/m²
ISOL03SH1L20	Isolmant 3 mm Parquet	1.05 m x 20 m rolls	252 m² (12 rolls)	5.00

■ N.B.: this product can be ordered by the pallet (no loose rolls)

## ISOLMANT PARQUET FILM


SPECIFIC PRODUCT FOR ACOUSTIC INSULATION UNDER FLOATING FLOORS, WITH INTEGRATED VAPOUR BARRIER AND ADHESIVE SELVAGE FOR EASY INSTALLATION.



High-density NPE-type polyethylene insulation mat coated with PE film with vapor barrier function. Product with adhesive selvage for overlapping and sealing of sheets.

Product with over lap. To be installed with the film facing upward.

 Nominal thickness: 2 mm



For more information visit the product page



CODE	Description	Size	Packaging (pallet)	€/m²
ISOLPARQUETFILM	Isolmant Parquet Film	1 m x 15 m rolls	300 m² (20 rolls)	4.80

■ N.B.: this product can be ordered by the pallet (no loose rolls)




## ISOLMANT SPECIAL 2 mm FOSSIL FREE

ISOLMANT SPECIAL SERIE R FOSSIL FREE FROM RENEWABLE SOURCES. THE MOST HIGH-PERFORMANCE SOLUTION FOR SOUNDPROOFING UNDER FLOATING FLOORS.

Isolmant Special Serie R Fossil Free polyethylene insulation mat, fully sustainable and from renewable sources. Its sustainable characteristics are guaranteed by Blue Angel and ISCC PLUS certification. The latter guarantees very high standards of responsibility and sustainable development, not only of the product, but also of the entire supply chain, and helps to achieve credits for the most stringent environmental certifications (CAM, LEED, ITACA, BREEAM, etc.).

To be installed with the embossed and screen-printed side upward.

✂ Nominal thickness: 2 mm




For more information visit the product page



CODE	Description	Size	Packaging (pallet)	€/m <sup>2</sup>
ISOL02GREEN15	Isolmant Special 2 mm Serie R Fossil Free	1.00 m x 15 m rolls	360 m <sup>2</sup> (24 rolls)	5.40

■ N.B.: this product can be ordered by the pallet (no loose rolls)

## FROM WOOD FOR WOOD: UNDERFLOOR ACOUSTIC INSULATION OF PLANT-BASED ORIGIN

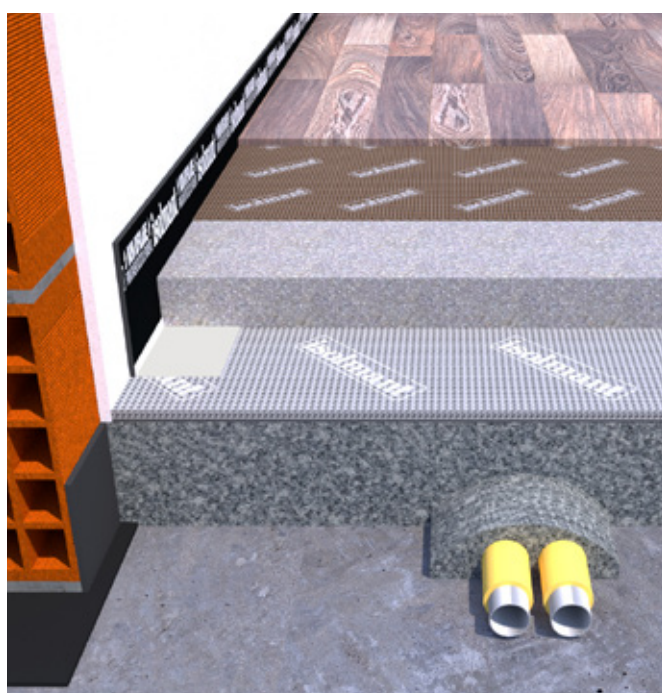


Isolmant Special 2 mm Serie R Fossil Free is part of the Isolmant Serie R Fossil Free range, made with special ISCC PLUS-certified polyethylene and composed of bio-circular renewable material (using the mass balance approach).

The wood-brown coloring is reminiscent of the type of flooring for which it is designed and the bio-circular materials of which it is composed. **Isolmant Special 2 mm Serie R Fossil Free** is made with tall oil, a waste product deriving from wood processing. This processing waste is then subjected to a normal polymerization process to achieve a “natural” plastic material, i.e. one deriving from renewable raw materials of non-fossil origin.

Isolmant Special 2 mm Serie R Fossil Free guarantees consistent performance over time, thanks to its intrinsic quality and high density, which improves impact sound insulation ( $\Delta L_w$  22 dB) and reflected walking noise (RWS, 21 sone) performance when used for floating installations of parquet and laminate flooring.

Blue Angel certified, it does not contain volatile substances (VOC A+) and can be disposed of according to EWC No. 170604.

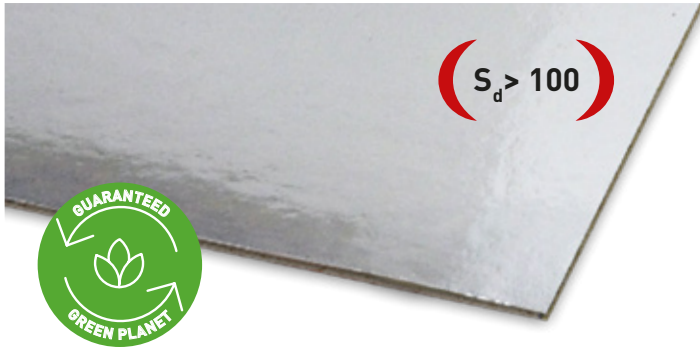


## ISOLMANT TOP CLASSIC

THE MOST COMPREHENSIVE, UNIVERSAL AND VERSATILE PRODUCT FOR UNDERFLOOR APPLICATIONS. MASS PRODUCT WITH SPECIFIC FIRE RATING FOR RADIANT FLOORS. 100% NATURAL PRODUCT WITH BLUE ANGEL CERTIFICATION.

Insulating mat made of high-density thermally conductive viscoelastic material covered with aluminum foil to prevent moisture from rising. We recommend using the Isolmant Aluminum Tape to tape the sheets of Isolmant Top Classic together. Classe di reazione al fuoco: B<sub>fl</sub>-s1

To be installed with the aluminum side facing up

✂️ Nominal thickness: 1.8 mm



[www.blauer-engel.de/uz156](http://www.blauer-engel.de/uz156)

For more information visit the product page



CODE	Description	Size	Packaging (pallet)	€/m <sup>2</sup>
ISOLMANTOP1.8	Isolmant Top	1 m x 8.5 m rolls	340 m <sup>2</sup> (40 rolls)	9.00

■ N.B.: the product can be ordered by pallets (no loose rolls). Loose rolls are available upon request for availability and always in compliance with the sales conditions defined with the sales office.

## ISOLMANT TOP INCOLLAPAVIMENTO




THE INSTALLATION SYSTEM FOR GLUE-FREE BONDING, ISOLMANT'S INNOVATION FOR A HYBRID INSTALLATION THAT COMBINES THE STABILITY OF GLUED INSTALLATION WITH THE SPEED AND CLEANLINESS OF FLOATING INSTALLATION.

Acoustic insulation mat made of high-density viscoelastic heat-conductive material. The product is coated with an adhesive layer, protected by silicone film, specially designed for gluing parquet, laminate and LVT flooring.

To be installed with the adhesive side facing up

✂️ Nominal thickness: 1.8 mm



[www.blauer-engel.de/uz156](http://www.blauer-engel.de/uz156)

For more information visit the product page




Installation video

CODE	Description	Size	Packaging (pallet)	€/m <sup>2</sup>
ISOLMANTOP1.8AD	Isolmant Top AD adhesive	1 m x 6.5 m rolls	260 m <sup>2</sup> (40 rolls)	19.00

■ N.B.: the product can be ordered by pallets (no loose rolls). Loose rolls are available upon request for availability and always in compliance with the sales conditions defined with the sales office.

## ISOLMANT 200 BV

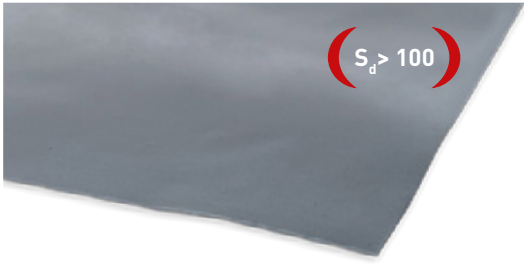

### INDICATED FOR PROTECTION AGAINST RISE OF HUMIDITY

HDPE (high density polyethylene) film for protection against rising humidity (vapour barrier). Isolmant 200 BV must be installed overlapping the sheets for 10 cm and taped using Isolmant Nastro Alluminato, to guarantee the continuity of the vapour barrier. Coming from recycled material.

✂ Nominal thickness: 200 µm

For more information visit the product page



CODE	Description	Size	Packaging	€/ m <sup>2</sup>
FILM200MYBV	Isolmant 200 BV	2 m (1+1 folded) x 25 m roll	300 m <sup>2</sup> (6 rolls)	1.74

**AFTER INSTALLATION AND IN THE EVENT OF FURTHER WORK IN ROOMS, PROTECT YOUR FLOOR WITH SPECIFIC PRODUCTS.**

## ISOLMANT COVER

Multifunctional non-woven non-slip protective sheet coated with waterproof PE film.

To be installed with the non-slip side facing down.

✂ Nominal thickness: 2.5 mm

### SUITABLE FOR THE TEMPORARY PROTECTION OF FLOORS, WITH WATERPROOF FILM.



For more information visit the product page



CODE	Description	Size	Packaging	€/ m <sup>2</sup>
ISOLCOVER	Anti-slip protective sheet	h 1 m x 25 m rolls (25 m <sup>2</sup> )	pallet of 15 rolls (375 m <sup>2</sup> )	5.00

## ISOLMANT COVER PLUS



### SUITABLE FOR TEMPORARY FLOOR PROTECTION, WITH WATERPROOF AND BREATHABLE FILM.

Multifunctional non-woven non-slip protective sheet coated with waterproof and breathable film (70 g/m<sup>2</sup>/24h). To be installed with the non-slip side facing down.

✂ Nominal thickness: 2.5 mm

For more information visit the product page



CODE	Description	Size	Packaging	€/ m <sup>2</sup>
ISOLCOVERPLUS	Anti-slip protective sheet	h 1 m x 25 m rolls (25 m <sup>2</sup> )	pallet of 15 rolls (375 m <sup>2</sup> )	5.90



## ISOLMANT KIT SCALE

SPECIFICALLY DESIGNED FOR THE  
SOUNDPROOFING OF STAIRWELLS.

Isolmant Kit Scale consists of standard-size sheets of IsolTile Classic for risers, treads and middle levels, to be trimmed on site to fit the specific surface. The KIT also contains the sheet joint strip and the side strip for separating the staircase from the stairwell, which is essential for completing the soundproofing.

### Package includes:

- Isolmant IsolTile Telo Pedata \* ▶ h 33 x 125 cm ▶ 22 pieces
- Isolmant IsolTile Telo Alzata \*\* ▶ h 20 x 125 cm ▶ 22 pieces
- Isolmant IsolTile Telo Ripiano ▶ h 50 x 125 cm ▶ 4 pieces
- Isolmant Fascia IsolTile ▶ h 7.5 cm x 20 m ▶ 5 pieces
- Isolmant Fascia Laterale ▶ h 18.5 cm x 25 m ▶ 1 piece
- Isolmant Fascia Tagliabattiscopa ▶ h 3 cm x 20 m ▶ 2 pieces

✂ **Nominal thickness: 2 mm**

\* and \*\* See image below


For more  
information visit  
the product page



CODE	Description	Pack	€/box
ISOL2TILESCALE	IsolTile Stairwell Kit	1 box	420.00

The issue of impact sound on the internal stairs of a building is well documented, particularly in residential buildings where all too often inconveniences arise due to the propagation and amplification of impact noise by people who do not use lifts. In fact, the particular and extremely rigid design of the stairwell and staircase generates structural noise which is rarely controlled at the design stage or during the construction of the building, either due to a lack of construction solutions or regulatory shortcomings.

This issue can be solved by applying resilient sheeting (IsolTile Classic), cut to size for risers, treads and intermediate levels. The sheets are applied by glue to any substrate, and the covering material is glued onto them.

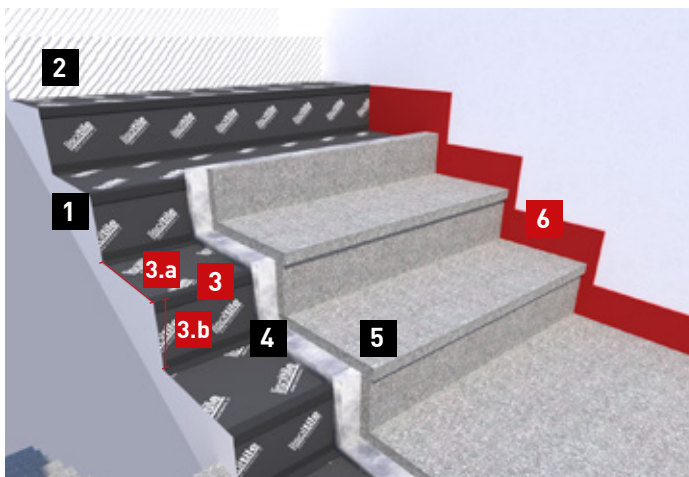

1. Structure of the stairwell
2. Cement glue
3. Isolmant Kit Scala  
\*3.a - \*\*3.b
4. Cement glue
5. Marble finish
6. Isolmant Fascia IsolTile Kit Scale




## ACOUSTIC ACCESSORIES

Where there are pillars, doors and other wall elements, any Isolmant Perimeter Strip must be seamlessly shaped to follow the perimeter of the room. The Isolmant range offers several versions of perimeter strips, specific to the various types of structures that may be encountered on the construction site.

To make the installation of the “**Isolmant Acoustic System**” easier, faster and more efficient, the range includes specific accessories that guarantee the separation of the screed from the walls at closed corners (concave) or edges (open - convex).

**Isolmant Angolo e Spigolo** and **Isolmant Angolo Porte**, already pre-formed to size and adhesively bonded, avoid the cutting and bending of the Perimeter Strip at non-linear wall elements.

Obviously, when building a floating substructure, choosing the Perimeter Strip that best suits the stratigraphy being installed and the use of Isolmant Tape Strip to tape the sheets together is essential.

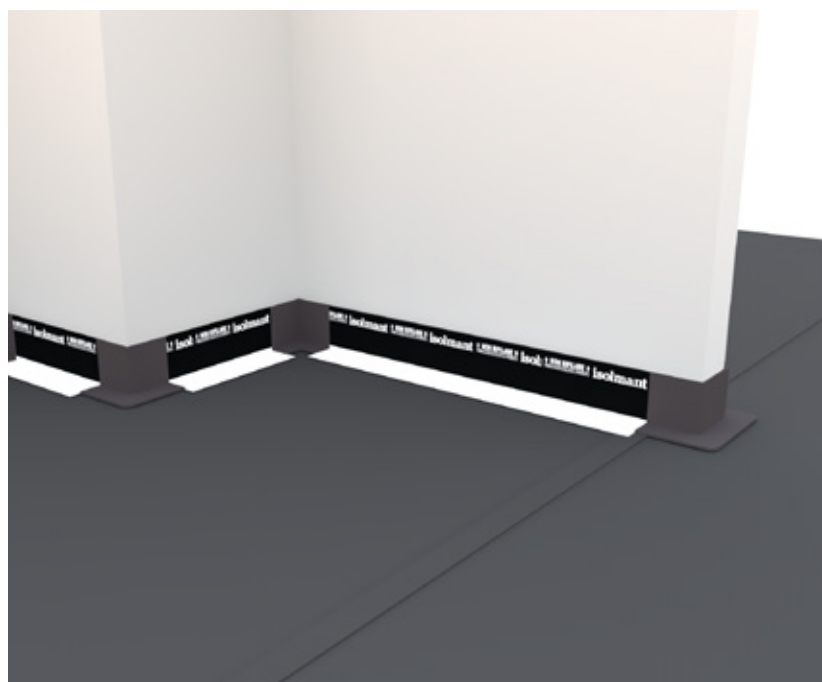

**THE USE OF APPROPRIATE AND SPECIALLY DESIGNED PERIMETER STRIPS AND TAPE STRIPS IS ESSENTIAL FOR A SUCCESSFUL ACOUSTIC SYSTEM. THE USE OF UNSUITABLE ACCESSORIES CAN COMPROMISE THE INSULATION PERFORMANCE OF THE STRUCTURE BY AS MUCH AS SEVERAL DECIBELS.**



## ISOLMANT FASCIA PERIMETRALE PRATICA

BASIC STRIP FOR PROPER  
INSTALLATION OF THE FLOATING  
SYSTEM.

For more  
information visit  
the product page



Adhesive strips made of non-reticulated polyethylene foam prepared for easy "L" shaped installation. Available in h 15 cm and h 25 cm sizes.

✂ Nominal thickness: 5 mm

CODE	Description	Size	Pack	€/m
FAPRATICPRM5H15	Fascia Perimetrale Pratica	15 cm x 50 m strips	10 strips = 500 m	1.86
FAPRATICPRM5H25	Fascia Perimetrale Pratica	25 cm x 50 m strips	6 strips = 300 m	2.60

## ISOLMANT FASCIA PERIMETRALE STACCA/ATTACCA

POLYETHYLENE PERIMETER STRIP WITH  
STICKER/TACK ADHESIVE TO HELP WITH  
CORRECT POSITIONING.



For more  
information visit  
the product page



15-cm adhesive strips made of closed-cell reticulated polyethylene foam with "peel-and-stick" adhesive.

✂ Nominal thickness: 3 mm

CODE	Description	Size	Pack	€/m
FADISPRM3H15SA	Fascia Perimetrale Stacca/Attacca	15 cm x 100 m strips	10 strips = 1000 m	2.00



## ISOLMANT FASCIA PERIMETRALE TECNICA RETICOLATA

"L" SHAPED PERIMETER STRIP FOR  
EASY AND SAFE INSTALLATION.


For more  
information visit  
the product page



Adhesive strips made of closed-cell, reticulated polyethylene foam prepared for easy "L"-shaped installation. Available in sizes h 18.5 cm (11 cm wall and 7.5 cm floor) and h 25 cm (17.5 cm wall and 7.5 cm floor). The strips come with silk-screen printed film with installation instructions.

✂ Nominal thickness: 5 mm

CODE	Description	Size	Pack	€/m
FATECISOLPRM5AD	Fascia Perimetrale Tecnica Reticolata	18.5 cm x 50 m strips	8 strips = 400 m	2.90
FATECISOL5H25AD	Fascia Perimetrale Tecnica Reticolata	25 cm x 50 m strips	6 strips = 300 m	3.80

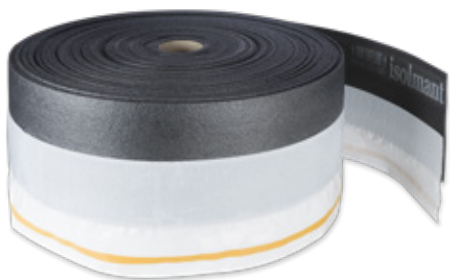

## ISOLMANT FASCIA PERIMETRALE TECNICA DOPPIO SPESSORE

A TECHNOLOGICALLY ADVANCED STRIP WITH THE DOUBLE THICKNESS THAT MAKES IT IDEAL EVEN IN LOW-THICKNESS SYSTEMS.

Adhesive perimeter strips prepared for easy "L"-shaped installation, consisting of a vertical part made of partially adhesive 5 mm-thick polyethylene to be applied to the wall and a horizontal part made of reduced 0.1 mm-thick HDPE with adhesive silicone paper on the underside. Available in the h 28 cm size (18 cm wall and 10 cm floor).

The strips come with silk-screened film with installation instructions.

✂️ Nominal thickness: 5 mm

For more information visit the product page



CODE	Description	Size	Pack	€/m
FATECPRMDS	Fascia Perimetrale Tecnica Doppio Sp.	28 cm x 50 m strips	4 strips = 200 m	3.30

## ISOLMANT FASCIA PERIMETRALE TECNICA RADIANTE

SPECIFIC STRIPS FOR SYSTEMS WITH UNDERFLOOR HEATING.



8 mm-thick, white-colored, 15 cm-high vertical polyethylene reticulated foam strips. The strips are adhesive-coated to a height of 7.5 cm, and fitted with transparent film for mounting on the radiant panel. Specifically designed for use with Isolmant Radiante.

✂️ Nominal thickness: 8 mm

For more information visit the product page



CODE	Description	Size	Pack	€/m
FARADIANT8H15	Fascia Perimetrale Radiante	15 cm x 50 m strips	8 strips = 400 m	2.40

**THE USE OF APPROPRIATE AND SPECIALLY DESIGNED PERIMETER STRIPS AND TAPE STRIPS IS ESSENTIAL FOR A SUCCESSFUL ACOUSTIC SYSTEM. THE USE OF UNSUITABLE ACCESSORIES CAN COMPROMISE THE INSULATION PERFORMANCE OF THE STRUCTURE BY AS MUCH AS SEVERAL DECIBELS.**



## ISOLMANT FASCIA NASTRO

TO TAPE THE UNDER SCREED SHEETS  
AND GUARANTEE A PROPER ACOUSTIC  
SYSTEM.

✂ Nominal thickness: 3 mm

7.5 cm high Isolmant adhesive strip.  
Suitable for sealing the various Isolmant sheets together (suitable for the entire under screed range).

For more  
information visit  
the product page



CODE	Description	Size	Pack	€/m
NSAD3H7.5	Isolmant Fascia Nastro	7.5 cm x 50 m strips	4 strips = 200 m	1.05

## ISOLMANT NASTRO TELATO

IDEAL FOR TAPING THE UNDER  
SCREED SHEETS WHERE GREATER  
RESISTANCE AND LOW THICKNESS  
IS REQUIRED.

✂ Nominal thickness: < 1 mm

High-strength adhesive duct tape, 5 cm thick.  
Suitable for sealing the various Isolmant sheets together (suitable for the entire under screed range).



For more  
information visit  
the product page



CODE	Description	Size	Pack	€/roll
NST	Isolmant Nastro Telato	5 cm x 25 m rolls	single roll	17.60



## ISOLMANT NASTRO ALLUMINATO

SPECIFICALLY FOR STRUCTURES WHERE  
THERE IS A UNDERFLOOR HEATING  
SYSTEM, IT PROVIDES CONTINUITY TO THE  
VAPOR BARRIER.

✂ Nominal thickness: < 1 mm

High-strength aluminum tape, 5 cm thick.  
Suitable for sealing all sheets together, particularly Isolmant UnderPlus Black.E Radiante BV, Isolmant UnderSpecial Radiante BV, Isolmant D311 and Isolmant Top Classic.

For more  
information visit  
the product page



CODE	Description	Size	Pack	€/roll
NSTPPALU50	Isolmant Nastro Alluminato	5 cm x 50 m rolls	single roll	9.95



## ISOLMANT ANGOLO E SPIGOLO

ENSURES THE CONTINUITY  
OF THE PERIMETER STRIP AT  
CORNERS AND EDGES PRESENT  
IN MASONRY.

✂ Nominal thickness: 5 mm

For more  
information visit  
the product page




Special accessories made of pre-formed and adhesive-coated polyethylene for forming corners.

CODE	Description	Size	Pack	€/piece
ISOLANGOLO	Isolmant Angolo	boxes of 50 pieces (base 5 cm x h 10 cm)	1 box	5.55 (x 50)
ISOLSPIGOLO	Isolmant Spigolo	boxes of 50 pieces (base 5 cm x h 10 cm)	1 box	5.55 (x 50)

## ISOLMANT TELAIO PORTE

ENSURES THE CONTINUITY  
OF THE PERIMETER STRIP AT  
DOOR SUB FRAMES.

✂ Nominal thickness: 5 mm



For more  
information visit  
the product page



Special preformed and adhesive-coated polyethylene accessories for application at sub frames. Inner opening about 11 cm.


CODE	Description	Size	Pack	€/piece
ISOLTELAIOPORTE	Isolmant Telaio Porte	boxes of 30 pieces (base 5 cm x h 10 cm)	1 box	10.50 (x 30)

**THE USE OF APPROPRIATE AND SPECIALLY DESIGNED PERIMETER STRIPS AND TAPE STRIPS IS ESSENTIAL FOR A SUCCESSFUL ACOUSTIC SYSTEM. THE USE OF UNSUITABLE ACCESSORIES CAN COMPROMISE THE INSULATION PERFORMANCE OF THE STRUCTURE BY AS MUCH AS SEVERAL DECIBELS.**



# AIRBORNE NOISE



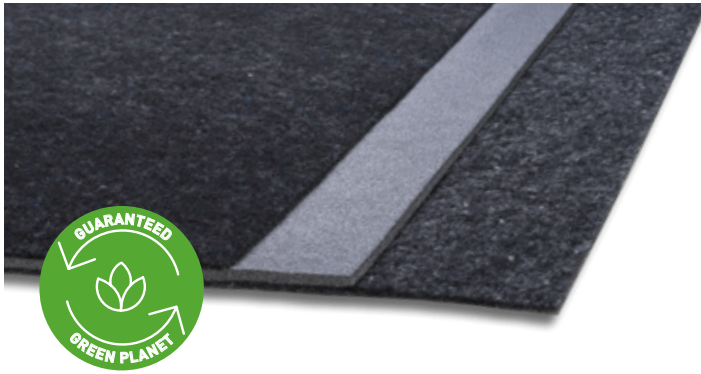

## ISOLMANT POLIMURO

PRODUCT SPECIFICALLY DESIGNED FOR ACOUSTIC INSULATION OF PARTITIONS WITH A REDUCED INTERFACE THICKNESS OR IN STRUCTURES, EVEN DRY-BUILT, WITH MINIMAL THICKNESSES.



Product consisting of Isolmant 5 mm sandwiched on both sides with FIBTEC XF1 (special needle-punched fiber produced to calibrated specifications to improve acoustic performance).

Product with over lap for easy installation.

✂ Nominal thickness: 12 mm



For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
ISOLPOLIMUROM	Isolmant Polimuro	1.5 m x 25 m rolls	37.5 m <sup>2</sup> (1 roll)	18.80
ISOLPOLIMURO	Isolmant Polimuro	1.5 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	18.25

## ISOLMANT PERFETTO SPECIAL

HIGH PERFORMANCE IS COMBINED WITH EXTREME EASE OF INSTALLATION ON THE BUILDING SITE, THANKS TO THE ADHESIVE LEDGE AND THE FULL-HEIGHT LOAD-BEARING PANEL. SPECIFIC FOR PARTITION AND PERIMETER WALLS.



Product composed of a panel of IsolFibtec pft (recycled fiber in technical polyester fabric with increasing density along the thickness, high thermal and acoustic performance) sandwiched with Isolmant Special 5 mm. Unlimited durability, non-toxic, environmentally friendly. Product with adhesive taping. Full-height panel for easy installation.

Product with over lap. To be installed with the screen-printed side (Isolmant logo) exposed.


✂ Nominal thickness: 30 - 50 mm



For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
PERFETTO30BV	Isolmant Perfetto Special 30 mm	1 m x 2.85 m panels	10-panel packs (28.5 m <sup>2</sup> )	41.90
PERFETTO50BV	Isolmant Perfetto Special 50 mm	1 m x 2.85 m panels	7-panel packs (19.95 m <sup>2</sup> )	48.60

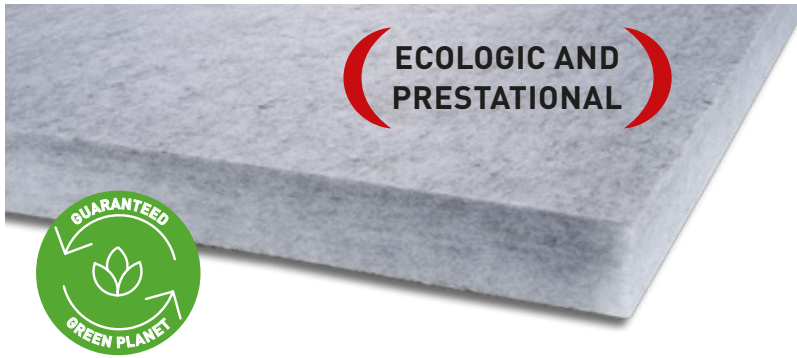

## ISOLMANT PERFETTO TR

FIBTEC TECHNOLOGY FOR ACOUSTIC INSULATION IN A SPECIFIC PRODUCT FOR PERIMETER AND PARTITION WALLS.

Product composed of a ISOLFIBTEC PFT (recycled fiber in technical polyester textile with increasing density along the thickness, high thermal and acoustic performance) panel. Unlimited durability, non-toxic, environmentally friendly. Full-height panel for easy installation.

Fire rating: B-s2,d0 Euro class.

✂️ **Nominal thickness: 30 - 50 mm (in stock)**

For more information visit the product page



Note: Non-standard thicknesses and heights can be ordered on request (20 working days' notice), for minimum mandatory quantities depending on thickness.

CODE	Description	Size	Pack	€/m <sup>2</sup>
PERFETTO30TR	Isolmant Perfetto TR 30 mm	1 m x 2.85 m panels	10-panel packs (28.5 m <sup>2</sup> )	30.85
PERFETTO50TR	Isolmant Perfetto TR 50 mm	1 m x 2.85 m panels	7-panel packs (19.95 m <sup>2</sup> )	35.25



# ISOLMANT FASCIA TAGLIAMURO STANDARD/STRONG



AVAILABLE IN VARIOUS WIDTHS, ESSENTIAL FOR A PROPER WALL ACOUSTIC SYSTEM.

10/15/30 cm strip of high-density Isolmant, calibrated in its composition to act as an "acoustic spring" below partitions, eliminating the transmission of noise from the wall to the floor and vice versa.

Available in two versions:


- Standard 50 kg/m<sup>3</sup> for soundproofing under lightweight partitions;
- Strong 70 kg/m<sup>3</sup> for soundproofing under heavy partitions.

✂ **Nominal thickness: 4 mm (Standard) and 6 mm (Strong)**

For more information visit the product page



CODE	Description	Size	Pack	€/m
FASTGM10	Isolmant Fascia Tagliamuro Standard	10 cm x 50 mstrips	15 rolls = 750 m	1.45
FASTGM15	Isolmant Fascia Tagliamuro Standard	15 cm x 50 m strips	10 rolls = 500 m	2.15
FASTGM30	Isolmant Fascia Tagliamuro Standard	30 cm x 50 mstrips	5 rolls = 250 m	4.10
FASTGM70H10	Isolmant Fascia Tagliamuro Strong	10 cm x 50 mstrips	15 rolls = 750 m	2.90
FASTGM70H15	Isolmant Fascia Tagliamuro Strong	15 cm x 50 mstrips	10 rolls = 500 m	4.20
FASTGM70H30	Isolmant Fascia Tagliamuro Strong	30 cm x 50 mstrips	5 rolls = 250 m	8.40

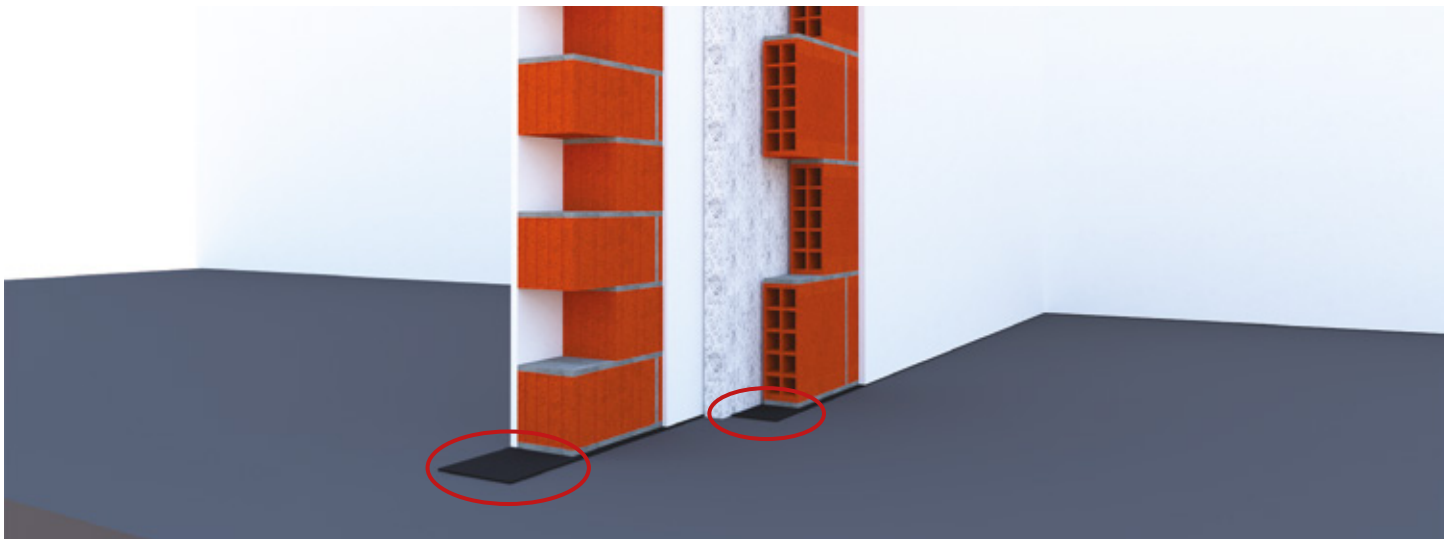

# THE ISOLMANT4YOU LINE



Isolmant revolutionizes the renovation concept by modulating its technology to the needs and requirements of each individual project and application.

**In fact, Isolmant's innovative soundproofing technologies are combined with various plasterboard panels to create customized solutions for every room and renovation intervention. An efficient, sustainable, healthy, quick and easy to apply dry system, which requires no demolition work, and provides excellent and long-lasting results.**

The Isolmant4you dry system consists of four main products, each available in four versions (**Standard, Hydro, D+ Salus e D+ Resisto**):

- **IsolGypsum Special**
- **IsolGypsum Perfetto**
- **IsolGypsum Telogomma**
- **IsolGypsum Duo**

Each product is thus characterized by a specific area of application and responds to various soundproofing requirements, perfectly meeting the installer's and end consumer's needs.

**The versatility of the range makes it possible to find the perfect solution** both in the presence of reduced thicknesses, where it is possible to work simply by placing a sandwiched panel, and in the presence of larger spaces, where it is possible to intervene with complex structures (e.g. counter walls with framing).

Included in the Isolmant4You system is the brand new **IsolGypsum Special Super Green**, made with **Isolmant Special Serie R Fossil Free** coupled with a special panel with high recycled content.

Isolmant4you was created to meet the comfort requirements of private users with specific renovation and restoration solutions which can also be included in the design of new structures to increase the soundproofing power of partition or perimeter walls.

It is a system designed to enhance the distributor's and installer's value, as they can propose targeted, specific and high-performance solutions, and to please the end user, who will be able to have a completely tailor-made solution for their home and environment.



# ISOLGYPSUM SPECIAL SUPER GREEN

## THE SANDWICHED PANEL WITH THE HIGHEST LEVEL OF SUSTAINABILITY



IsolGypsum Special Super Green is a specific solution for the acoustic and thermal renovation of thin walls, created with a 10 mm thick **panel of Isolmant Special Serie R Fossil Free**, covered with a specific fabric sheet, sandwiched with a **35% recycled content sheet** (the one with the highest recycled percentage on the market).

**This special manufactured product has the highest sustainable standards on the market for sandwiched gypsum board panels.** The core of the sheet, with higher density and type D glass-fiber reinforced gypsum, ensures a high level of surface hardness and mechanical strength. Thanks to Activ'Air® technology, the panel can absorb and neutralize up to 70% of the formaldehyde in indoor air. Isolmant Special Serie R Fossil Free polyethylene is ISCC PLUS-certified and made with raw materials from renewable non-fossil sources.

### THE PANEL WITH THE HIGHEST PERCENTAGE OF RECYCLED MATERIALS ON THE MARKET

- Percentage of recycled materials = 35%
- Eurofins Indoor Air Comfort Gold certified
- 100% recyclable
- Reduces the level of formaldehyde in the air



### THE ONLY POLYETHYLENE DERIVED FROM NON-FOSSIL SOURCES

- Made from bio circular raw materials
- Blue Angel certified
- ISCC PLUS certified
- Unaffected by time




For more information visit the product page



A product for thermo-acoustic renovation consisting of a 12.5 mm thick D-type sheet (consisting of a rehydrated, high-density, gypsum hemihydrate core with glass fiber and wood fiber additives and an external paper covering) sandwiched with a 10 mm thick panel of Isolmant Special Serie R Fossil Free.

To be installed with the coated gypsum board exposed.

 Nominal thickness: 22.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPAA13GREEN48	IsolGypsum Special Super Green	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	51.25

# THE ISOLGYPSUM SPECIAL LINE

## ISOLGYPSUM SPECIAL

IsolGypsum Special is a 5 or 10 mm thick panel of Isolmant Special in the distinctive #isolmantred color and covered with a specific fabric sheet, sandwiched with four different types of plasterboard. A product with unique features, considered a universal 'wall saver', that restores walls both acoustically and thermally. A single solution for a low-thickness renovation which guarantees not only an improvement in the soundproofing capacity of the wall but also the significant energy efficiency of the premises.



For more information visit the product page

## ISOLGYPSUM SPECIAL STANDARD

THE UNIQUE ISOLMANT "SALVAMURO" WITH STANDARD SLAB.

A product for thermal-acoustic renovation consisting of a 12.5 mm thick type A slab (made up of a rehydrated hemihydrated gypsum core, covered on both sides with cellulose material acting as external reinforcement) sandwiched with a 5 or 10 mm thick Isolmant Special panel.

To be installed with the coated gypsum board exposed.

✂ Nominal thickness: 17.5 - 22.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPS13PE10M248	IsolGypsum Special S 10 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	35.40
GYPS13PE5M248	IsolGypsum Special S 5 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	28.60

All versions, with the exception of IsolGypsum Special Standard, require delivery times and payment to be agreed.

**NON-STANDARD SIZES AND PACKAGING** contact Customer Services directly to check feasibility and delivery times.

# GYPSTUMBOARD SHEET VARIANTS



## ISOLGYPSUM SPECIAL IDRO

IsolGypsum Special coupled with a special H2 type gypsum plasterboard of 12,5 mm thickness (with reduced water absorption). **Specific for humid environments.**

To be installed with the coated gypsum board exposed.

✂ Nominal thickness: 17.5 - 22.5 mm



CODE	Description	Size	Pack	€/ m <sup>2</sup>
GYPA13PE10M248	IsolGypsum Special D+S 10 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	43.40
GYPA13PE5M248	IsolGypsum Special D+S 5 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	36.70

## ISOLGYPSUM SPECIAL D+ SALUS

IsolGypsum Special coupled with a special sheet with increased density nucleus, sp. 12.5 mm (with plaster added with glass fibres). The special Activ Air technology allows the sheet to absorb and neutralize up to 70% of the formaldehyde present in the air. Covered with a special white paper which facilitates finishing operations. **Heavy plate that purifies the air.**

To be installed with the coated gypsum board exposed.

✂ Nominal thickness: 17.5 - 22.5 mm



CODE	Description	Size	Pack	€/ m <sup>2</sup>
GYPA13PE10M248	IsolGypsum Special D+S 10 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	43.60
GYPA13PE5M248	IsolGypsum Special D+S 5 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	36.70

## ISOLGYPSUM SPECIAL D+ RESISTO

IsolGypsum Special coupled with a special type of coated plaster sheet, th. 2.5mm (slab with increased core density, the gypsum of which is added with a high quantity of glass fibres). Covered with a special white paper that facilitates finishing operations. **Sheet with high load capacity and greater soundproofing power.**

To be installed with the coated gypsum board exposed.

✂ Nominal thickness: 17.5 - 22.5 mm



CODE	Description	Size	Pack	€/ m <sup>2</sup>
GYPHF13PE10M248	IsolGypsum Special D+R 10 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	56.60
GYPHF13PE5M248	IsolGypsum Special D+R 5 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	49.60

Discover all the solutions on:

# THE ISOLGYPSUM PERFETTO LINE

## ISOLGYPSUM PERFETTO

IsolGypsum Perfetto is a panel made of special Fibtec fiber with a thickness of 10 or 20 mm sandwiched with four different types of plasterboard sheets.

Its technical characteristics make it the material with the highest acoustic efficiency, as well as the highest level of sustainability. In fact, Fibtec is Isolmant's special patented polyester fiber: ecological, non-toxic and of unlimited durability. A high-performance product capable of increasing the soundproofing capacity of a weak wall by more than 10 dB. The 10 mm Fibtec version can be glue-applied or screwed to frames.



For more information visit the product page

## ISOLGYPSUM PERFETTO STANDARD

THE ACOUSTIC PERFORMANCE OF FIBTEC IN A STANDARD SANDWICHED PANEL.

Product for the acoustic renovation of walls composed of a 12.5 mm thick type A slab (consisting of a rehydrated hemihydrated gypsum core, covered on both sides with a cellulose material acting as external reinforcement) sandwiched with a 10 or 20 mm thick Isolmant Fibtec panel.

To be installed with the coated gypsum board exposed.

➡ Nominal thickness: 22.5 - 32.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPS13FIB10M248	IsolGypsum Perfetto S 10 mm screwable	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	31.30
GYPS13FIB20M248	IsolGypsum Perfetto S 20 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	37.60

Special compound FIBTEC 10 mm screwable

All versions, with the exception of IsolGypsum Perfetto Standard, require delivery times and payment to be agreed.

**NON-STANDARD SIZES AND PACKAGING** contact Customer Services directly to check feasibility and delivery times.

## ISOLGYPSUM PERFETTO IDRO

IsolGypsum Perfetto coupled with a special H2 type gypsum plasterboard of 12,5 mm thickness (with reduced water absorption). **Specific for humid environments.**

To be installed with the coated gypsum board exposed.

✂ Nominal thickness: 22.5 - 32.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
● GYPWP13F10M248	IsolGypsum Perfetto SI 10 mm screwable	1.2 m x 2.0 m (2.4 <sup>m<sup>2</sup></sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	38.70
● GYPWP13F20M248	IsolGypsum Perfetto SI 20 mm	1.2 m x 2.0 m (2.4 <sup>m<sup>2</sup></sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	45.30


Special compound FIBTEC 10 mm screwable

## ISOLGYPSUM PERFETTO D+ SALUS

IsolGypsum Perfetto coupled with a special sheet with increased density nucleus, sp. 12.5 mm (with plaster added with glass fibres). The special Activ Air technology allows the sheet to absorb and neutralize up to 70% of the formaldehyde present in the air. Covered with a special white paper which facilitates finishing operations. **Heavy plate that purifies the air.**

To be installed with the coated gypsum board exposed.

✂ Nominal thickness: 22.5 - 32.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
● GYPAAFIB10M248	IsolGypsum Perfetto D+S 10 mm screwable	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	39.00
● GYPAAFIB20M248	IsolGypsum Perfetto D+S 20 mm	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	45.50

Special compound FIBTEC 10 mm screwable

## ISOLGYPSUM PERFETTO D+ RESISTO

IsolGypsum Perfetto coupled with a special type of coated plaster sheet, th. 2.5mm (slab with increased core density, the gypsum of which is added with a high quantity of glass fibres). Covered with a special white paper that facilitates finishing operations. **Sheet with high load capacity and greater soundproofing power.**

To be installed with the coated gypsum board exposed.

✂ Nominal thickness: 22.5 - 32.5 mm



CODICE	Descrizione	Formato	Confezione	€/m <sup>2</sup>
● GYPHFFIB10M248	IsolGypsum Perfetto D+R 10 mm avvitabile	lastre da 1,2 m x 2,0 m (2,4 m <sup>2</sup> )	48 m <sup>2</sup> (bancale da 20 lastre)	51,90
● GYPHFFIB20M248	IsolGypsum Perfetto D+R 20 mm	lastre da 1,2 m x 2,0 m (2,4 m <sup>2</sup> )	48 m <sup>2</sup> (bancale da 20 lastre)	58,40

Speciale mescola FIBTEC 10 mm avvitabile

Discover all the solutions on:

# THE ISOLGYPSUM TELOGOMMA LINE

## ISOLGYPSUM TELOGOMMA

IsolGypsum Telogomma is Isolmant's solid coupling made from a special compound EPDM rubber-based panel with mineral fillers and a surface density of 4 kg/m<sup>2</sup> coupled with four different types of plasterboard. Suitable for enhancing soundproofing in lightweight structures, it becomes the ideal product as a second slab in double-slab structures. Its technical characteristics ensure high vibration absorption, as well as significant low-frequency soundproofing.



For more information visit the product page

## ISOLGYPSUM TELOGOMMA STANDARD

ISOLMANT TELOGOMMA TECHNOLOGY COUPLED WITH A STANDARD SLAB SPECIFICALLY DESIGNED FOR USE AS A SECOND SLAB IN COUNTER-WALL STRUCTURES.

Product for the acoustic insulation of walls composed of a 12.5 mm thick type A slab (consisting of a rehydrated hemihydrated gypsum core, covered on both sides with cellulose material acting as external reinforcement) coupled with a 2 mm thick 4 kg/m<sup>2</sup> surface density Isolmant Telogomma panel.

To be installed with the coated gypsum board exposed.

➡ Nominal thickness: 14.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYP513RBEPDM248	IsolGypsum Telogomma S	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	41.80

All versions, with the exception of IsolGypsum Telogomma Standard, require delivery times and payment to be agreed.

NON-STANDARD SIZES AND PACKAGING contact Customer Services directly to check feasibility and delivery times.

# GYPSUM BOARD VARIANTS



## ISOLGYPSUM TELOGOMMA IDRO

IsolGypsum Telogomma coupled with a special H2 type gypsum plasterboard of 12,5 mm thickness (with reduced water absorption). **Specific for humid environments.**

To be installed with the coated gypsum board exposed.

➡ Nominal thickness: 14.5 mm




CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPSWP13RB2M248	IsolGypsum Telogomma SI	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	50.10

## ISOLGYPSUM TELOGOMMA D+ SALUS

IsolGypsum Telogomma coupled with a special sheet with increased density nucleus, sp. 12.5 mm (with plaster added with glass fibres). The special Activ Air technology allows the sheet to absorb and neutralize up to 70% of the formaldehyde present in the air. Covered with a special white paper which facilitates finishing operations. **Heavy plate that purifies the air.**

To be installed with the coated gypsum board exposed.

➡ Nominal thickness: 14.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPAEPDM2M248	IsolGypsum Telogomma D+S	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	49.80

## ISOLGYPSUM TELOGOMMA D+ RESISTO

IsolGypsum Telogomma coupled with a special type of coated plaster sheet, th. 2.5mm (slab with increased core density, the gypsum of which is added with a high quantity of glass fibres). Covered with a special white paper that facilitates finishing operations. **Sheet with high load capacity and greater soundproofing power.**

To be installed with the coated gypsum board exposed.

➡ Nominal thickness: 14.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPHFEPDM2M248	IsolGypsum Telogomma D+R	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	62.70

Discover all the solutions on:

# THE ISOLGYPSUM DUO LINE

## ISOLGYPSUM DUO

IsolGypsum Duo is the newest solution in the IsolGypsum line, a combination of technical features that guarantee high acoustic efficiency.

The strength of two insulation technologies combined in a single product: IsolGypsum Duo is in fact a 24.5 mm thick panel that combines Isolmant Telogomma, a special compound of EPDM with mineral fillers and a surface density of 4 kg/m<sup>2</sup>, with 10 mm thick Isolmant Perfetto. An unbeatable duo available in four versions according to the type of panel to which it is sandwiched. Thanks to the combination of materials with various compositions and densities, IsolGypsum Duo provides strong noise reduction over the entire frequency range. It can be applied both with direct cladding and in metal-framed structures.



For more information visit the product page

## ISOLGYPSUM DUO STANDARD

**THE NEW SOLUTION THAT DOUBLES THE ACOUSTIC EFFECTIVENESS WITH STANDARD SLAB.**

Product for thermal and acoustic renovation consisting of a 12.5 mm thick type A panel (consisting of a rehydrated hemihydrated gypsum core, covered on both sides with cellulosic material acting as external reinforcement) sandwiched with a layer of Isolmant Telogomma, EPDM with a special compound with mineral fillers and surface density of 4 kg/m<sup>2</sup>, followed by a 10 mm thick layer of Isolmant Perfetto.

To be installed with the Isolmant Perfetto layer adhered to the existing wall.

➡ Nominal thickness: 24.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPS13DUOM248	IsolGypsum Duo S	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	61.10

**All versions, with the exception of IsolGypsum Duo Standard, require delivery times and payment to be agreed.**

**NON-STANDARD SIZES AND PACKAGING contact Customer Services directly to check feasibility and delivery times.**

# GYPSUM BOARD VARIANTS



## ISOLGYPSUM DUO IDRO

IsolGypsum Duo coupled with a special H2 type gypsum plasterboard of 12,5 mm thickness (with reduced water absorption). **Specific for humid environments.**

To be installed with the Isolmant Perfetto layer adhered to the existing wall.

✂ Nominal thickness: 24.5 mm




CODICE	Descrizione	Formato	Confezione	€/m <sup>2</sup>
GYPSWP13DUOM248	IsolGypsum Duo SI	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	70.20

## ISOLGYPSUM DUO D+ SALUS

IsolGypsum Duo coupled with a special sheet with increased density nucleus, sp. 12.5 mm (with plaster added with glass fibres). The special Activ Air technology allows the sheet to absorb and neutralize up to 70% of the formaldehyde present in the air. Covered with a special white paper which facilitates finishing operations. **Heavy plate that purifies the air.**

To be installed with the Isolmant Perfetto layer adhered to the existing wall.

✂ Nominal thickness: 24.5 mm




CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPA13DUOM248	IsolGypsum Duo D+S	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	72.30

## ISOLGYPSUM DUO D+ RESISTO

IsolGypsum Duo coupled with a special type of coated plaster sheet, th. 2.5m (slab with increased core density, the gypsum of which is added with a high quantity of glass fibres). Covered with a special white paper that facilitates finishing operations. **Sheet with high load capacity and greater soundproofing power.**

To be installed with the Isolmant Perfetto layer adhered to the existing wall.

✂ Nominal thickness: 24.5 mm



CODE	Description	Size	Pack	€/m <sup>2</sup>
GYPHF13DUOM248	IsolGypsum Duo D+R	1.2 m x 2.0 m (2.4 m <sup>2</sup> ) panels	48 m <sup>2</sup> (pallet of 20 panels)	83.00

Discover all the solutions on:

# MORE PRODUCTS FOR CLADDING INSULATION

## ISOLMANT INCOLLAFACILE

THE SEALING ADHESIVE SPECIFICALLY FOR BONDING AND SEALING BARE OR SANDWICHED PLASTERBOARD PANELS.



MS polymer-based elastic universal adhesive with high initial tack. Provides excellent grip on most materials, specific for bonding bare or sandwiched plasterboard panels. Non-corrosive and solvent-free. It provides good grip even on wet substrates.

290 ml cartridge

✂ Indicative yield: 1 cartridge per 1.2 x 2.0 m panel (1 cartridge/2.4 m<sup>2</sup>)

For more information visit the product page



CODE	Description	Size	Pack	€/cartridge
ISOLCOLLAHP	Isolmant HP Universal Adhesive	290 ml cartridge	single cartridge	19.40

## ISOLMANT FASCIA TAGLIAMURO ISOLGYPSUM

ESSENTIAL FOR THE CORRECT INSTALLATION OF THE ISOLGYPSUM RANGE ACOUSTIC SYSTEM.



High-density (70 kg/m<sup>3</sup>) 5-cm Isolmant adhesive strips specifically for installing pre-sandwiched plasterboard panels.

✂ Nominal thickness: 6 mm

For more information visit the product page



CODE	Description	Size	Pack	€/m
FADISTGMGYPS6H5	Isolmant Fascia Tagliamuro IsolGypsum	5 cm x 25 mstrips	10 strips = 250 m	1.85

# PLASTERBOARD WALL AND COUNTER- WALL INSULATION

## ISOLMANT POLIFIBRE BLOCCARUMORE

ISOLMANT TECHNOLOGY PACKED INTO A CAVITY PRODUCT SPECIFICALLY DESIGNED FOR RENOVATION. EASY TO INSTALL AND EASY TO HANDLE.



Product composed of red Isolmant Special, positioned between two panels in ISOLFIBTEC FLC with a thickness of approximately 20 mm each (recycled fiber in technical polyester fabric with high acoustic and thermal performance). Unlimited durability, non-toxic and environmentally friendly. The roll format makes installation quick and easy, to be placed in cavities for the soundproofing and thermal insulation of vertical partitions.

✂️ Nominal thickness: 40 mm



For more information visit the product page




CODE	Description	Size	Pack	€/m <sup>2</sup>
ISOLPOLIFIBRE	Isolmant Polifibre Bloccarumore	0.6 x 6 m roll	43.2 m <sup>2</sup> (12 rolls)	25.40
ISOLPOLIFIBREMAXI	Isolmant Polifibre Bloccarumore	0.6 x 24 m roll	43.2 m <sup>2</sup> (3 rolls)	25.40

Maxi roll ideal for large construction sites



## ISOLMANT PERFETTO CG



ENVIRONMENTALLY FRIENDLY AND HIGHLY PERFORMING, THE BEST FOR PLASTERBOARD STRUCTURES, IDEAL FOR BOTH VERTICAL STRUCTURES AND SUSPENDED CEILINGS.

Product consisting of a IsolFibtec pft panel (recycled fiber in technical polyester textile with increasing density along the thickness, high thermal and acoustic performance) specifically for plasterboard applications. Unlimited durability, non-toxic, environmentally friendly.

Fire rating: B-s2,d0 Euro class.

✂️ Nominal thickness: 25 - 45 mm



For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
PERFETTO25CG	Isolmant Perfetto CG 25 mm	0.6 m x 1 m panels	30-panel packs (18 m <sup>2</sup> )	12.00
PERFETTO45CG	Isolmant Perfetto CG 45 mm	0.6 m x 1 m panels	20-panel packs (12 m <sup>2</sup> )	19.90
PERFETTO60CG	Isolmant Perfetto CG 60 mm	0.6 m x 1 m panels	15-panel packs (9 m <sup>2</sup> )	23.20

# ACOUSTIC BAFFLES

Acoustic baffles are vertical partitioning elements to be used in the space of suspended ceilings or raised floors at the vertical partitions between units to improve the acoustic and thermal performance of these building elements.

Acoustic baffles reduce insulation losses due to the formation of acoustic bridges (losses can be estimated at around 10 dB) at the upper or lower vertical joints at partitions.



## ISOLMANT SETTO ACUSTICO FIBRA

THE MOST FLEXIBLE SOLUTION, CAN BE SHAPED AROUND EXISTING PIPES AND DUCTS.

Acoustic baffle for interior mobile or plasterboard walls to be positioned in the space between the wall and the lower floor or between the wall and the upper floor. Consisting of a panel of IsolFIBTEC FLC, a high-density recycled and thermobonded polyester fiber (60 kg/m<sup>3</sup>).

✂️ Nominal thickness: 8 cm

Length: 120 cm

Height: on request, maximum h 1 m

Reaction to fire: Euroclass B, s1-d0


For more information visit the product page



■ N.B.: Product only available for order with 10 working days' notice.

\* To calculate the price of the custom size use this formula -> [(price per piece:100) x desired height in centimeters] + 20%.  
Ex: Desired height 80 cm -> [(55.14:100) x 80] + 20%.

CODE	Description	Size	Pack	€/piece*
ISOLSETTOFIBRA	Isolmant Setto Acustico Fibra LC	1.20 m x 1 m	single	55.14

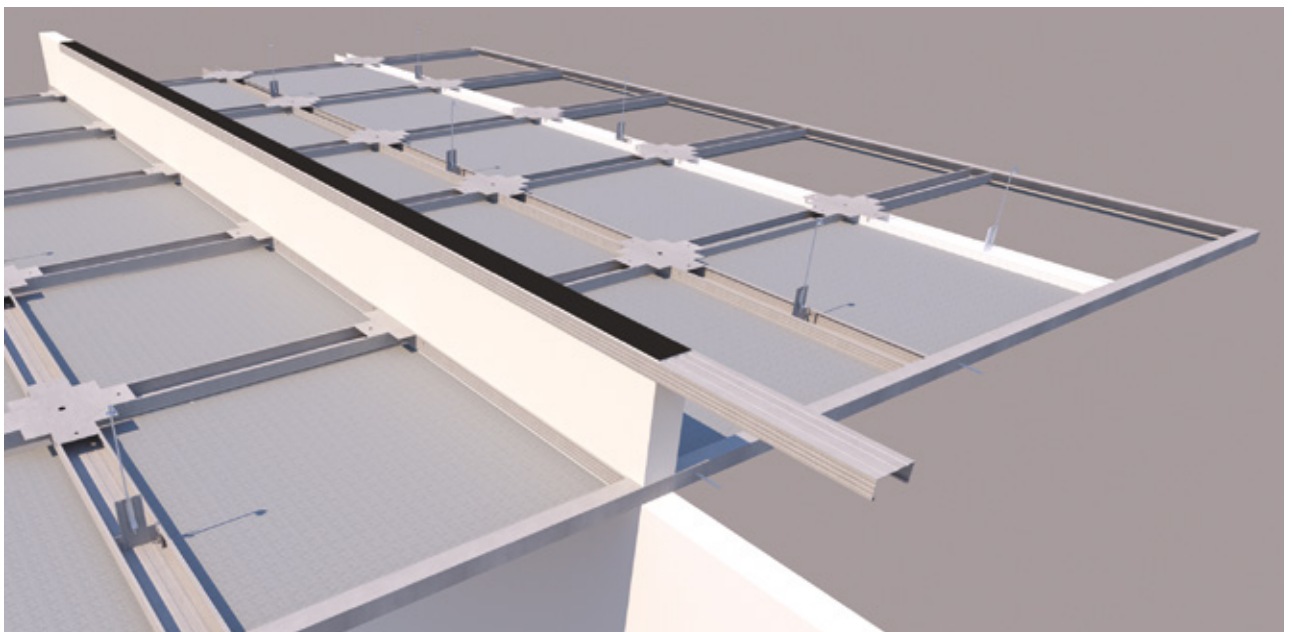



## ISOLMANT SETTO ACUSTICO CG

THE MOST HIGH PERFORMANCE SOLUTION WITH  
 $R_w = 48$  DB soundproofing power.

Acoustic baffle to complement interior movable or plasterboard walls to be placed in the plenum between the wall itself and the lower floor or between the wall and the upper floor. Made by sandwiching two 12.5 mm gypsum board panels and 80-mm IsolFIBTEC FLC (recycled, heat-bonded polyester fiber) panel.

➤ **Nominal thickness: 10.5 cm**

**Length: 120 cm**

**Height: on request, maximum h 1 m**

**Reaction to fire: Euroclass B, s1-d0**




For more information visit the product page



■ N.B.: Product only available for order with 10 working days' notice.

\* To calculate the price of the custom size use this mode -> [(price per piece:100) x desired height in centimeters] + 20%.  
Ex: Desired height 80 cm -> [(108.25:100) x 80] + 20%.

CODE	Description	Size	Pack	€/piece*
ISOLSETTOAC80	Isolmant Setto Acustico CG	1.20 m x 1 m	single	108.25

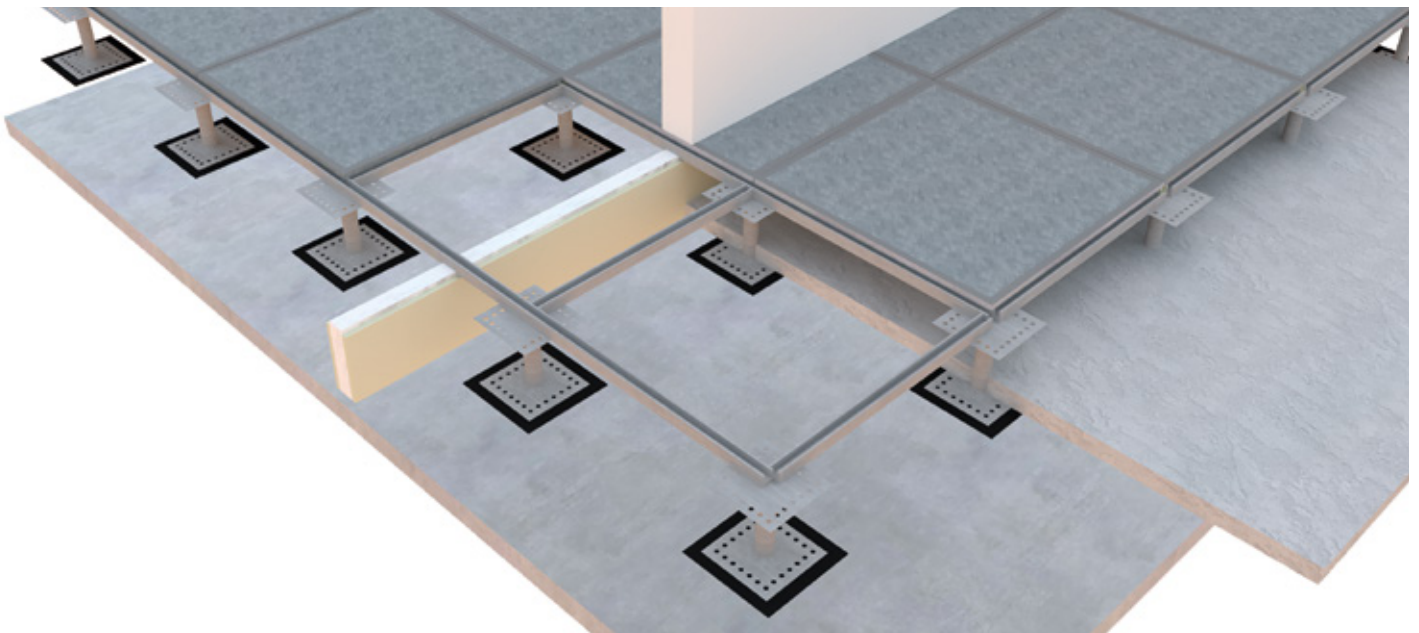



MASSIVE  
**PRODUCTS**






# SYSTEM MASSIVE

## The perfect combination of mass and elasticity: the new tailor-made solutions for lightweight structures.

Over the years, the "mass-spring-mass" principle, according to which effective acoustic systems are made in the construction industry, has demonstrated limitations in the presence of extremely light or weak structures.

Extensive research and worksite experience have shown that to achieve optimal results, it is not enough to use acoustic products whose only characteristic is their solidity. This was the starting point for **the development of Sistema Massa by Isolmant**, which consists of products with an optimal ratio of elasticity to mass for total acoustic comfort. These solutions meet **the needs of all "light" structures that not only need greater solidity but also good vibration damping capacities. Three comprehensive and well-calibrated products to cover major construction site needs:**

- **Isolmant Telogomma Classic**, the new Telogomma product from Isolmant upgraded with a new elastodynamic compound specifically for acoustic insulation and vibration damping in lightweight structures
- **Isolmant Telogomma E+45**, made with the new Telogomma inserted between two layers of Isolmant Special, particularly suitable for the acoustic insulation of wooden or lightweight slabs where good airborne noise insulation is also required
- **Isolmant Telogomma Plus**, a soft and flexible multi-purpose product suitable for insulating pipes, shutter boxes and small components with uneven surfaces

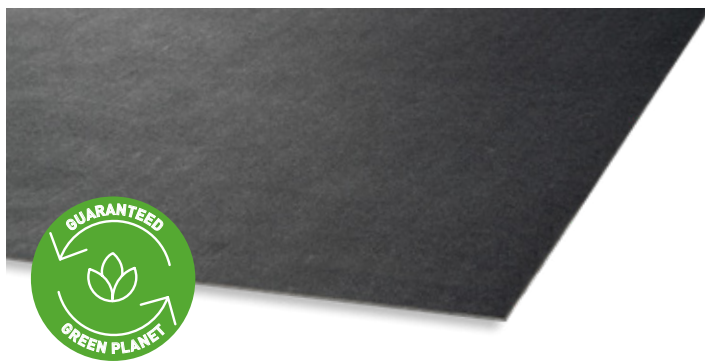

## ISOLMANT TELOGOMMA CLASSIC

UPGRADED VERSION WITH IMPROVED PERFORMANCE LEVELS. THE IDEAL PRODUCT FOR SOUNDPROOFING AND VIBRATION DAMPING IN LIGHTWEIGHT STRUCTURES.

New rubber-based elastodynamic compound with calibrated amounts of mineral fillers for increased surface mass without compromising the elastic capabilities that are essential for optimum acoustic comfort. Covered on both sides with an innovative non-stick gauze.

On request, also available in an adhesive version (minimum quantity 1 pallet).

✂ Nominal thickness: 1.7 mm

For more information visit the product page



CODE	Description	Size	Pack	€/ m <sup>2</sup>
TELOG02KG4	Isolmant Telogomma	1 m x 3 m rolls	30-roll pallets (90 m <sup>2</sup> )	34.45

■ Note: on request Isolmant Telogomma Classic is also available with other mass sizes, both in the standard and adhesive versions. For information on minimum quantities, prices and delivery times, contact customer services at [export@isolmant.it](mailto:export@isolmant.it).



## ISOLMANT TELOGOMMA E+45

**SPECIFICALLY FOR LIGHTWEIGHT SLABS WHERE A COMPLETE PRODUCT (SPRING + MASS) IS REQUIRED, WHICH ALSO REDUCES AIRBORNE NOISE.**

Product composed of the new Isolmant Telogomma Classic coupled on both sides with Isolmant Special. Telogomma E+45 is particularly suitable for the soundproofing of wooden or lightweight slabs. The product combines the excellent impact sound insulation provided by the Isolmant Special layer with the excellent characteristics of the massive elastodynamic compound of the new Telogomma Classic.

For more information visit the product page



✂️ **Nominal thickness: 8 mm**

CODE	Description	Size	Pack	€/m <sup>2</sup>
ISOL45	Isolmant Telogomma E+45	1 m x 3 mrolls	3 m <sup>2</sup> (1 roll)	58.20

## ISOLMANT TELOGOMMA PLUS

**SPECIFIC FOR INSULATING LARGER OR SMALLER COMPONENTS SUCH AS PIPES, SHUTTER BOXES, FOILS ETC DUE TO ITS ABILITY TO DAMPEN EVEN LARGE VIBRATIONS. SOFT AND ADHESIVE, THANKS TO ITS CONFORMABILITY IT ADAPTS TO ALL SURFACES, EVEN NON-PLANAR ONES.**



Flexible adhesive product consisting of the new Isolmant Telogomma Classic coupled with closed-cell, elastic polyolefin polymer compound foam. Thanks to its conformability and adhesive side, it is ideal for application on surfaces of different sizes, also non-planar surfaces. Easily cut with a cutter.

For more information visit the product page




The product is adhesive-coated on one side.

✂️ **Nominal thickness: 7.5 mm**

CODE	Description	Size	Pack	€/m <sup>2</sup>
TELOGOMMAPLUS	Isolmant Telogomma Plus	1 m x 3 m roll	3 m <sup>2</sup> (1 roll)	60.30



# VIBRATION DAMPING PRODUCTS

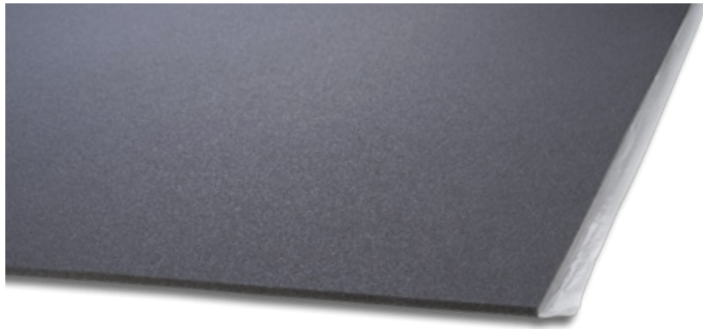

## ISOLMANT CEMENTO ARMATO

SPECIFIC PRODUCT FOR COATING  
REINFORCED CONCRETE STRUCTURES.

Isolmant product adhesive-coated on one side, for lining reinforced concrete structures (stairwells, lift shafts and pillars in general).

✂ Nominal thickness: 5 - 10 mm

For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
ISAD05N	Isolmant Reinforced Concrete 5 AD	1.5 m x 100 m rolls	150 m <sup>2</sup> (1 roll)	12,40
ISAD10N120R	Isolmant Reinforced Concrete 10 AD	1.2 m x 60 m rolls	72 m <sup>2</sup> (1 roll)	21,85

## ISOLMANT DAMP

VIBRATION DAMPER SPECIFICALLY FOR  
HORIZONTAL STRUCTURES SUBJECT TO HIGH  
LOADS.




A product consisting of a selected agglomerate of vulcanized rubber granules with a density of approx. 700 kg/m<sup>3</sup> for application as vibration damping under equipment or high loads.

✂ Nominal thickness: 5 - 10 - 20 mm

For more information visit the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
DAMP5H1L10	Isolmant Damp 5 mm	1 m x 10 m (10 m <sup>2</sup> ) rolls	10 m <sup>2</sup> (1 roll)	23.20
DAMP10H1,2L1	Isolmant Damp 10 mm	1 m x 1.20 m (1.2 m <sup>2</sup> ) panels	120 m <sup>2</sup> (pallet of 100 panels)	42.45
DAMP20H1,2L1	Isolmant Damp 20 mm	1 m x 1.20 m (1.2 m <sup>2</sup> ) panels	60 m <sup>2</sup> (pallet of 50 panels)	76.15

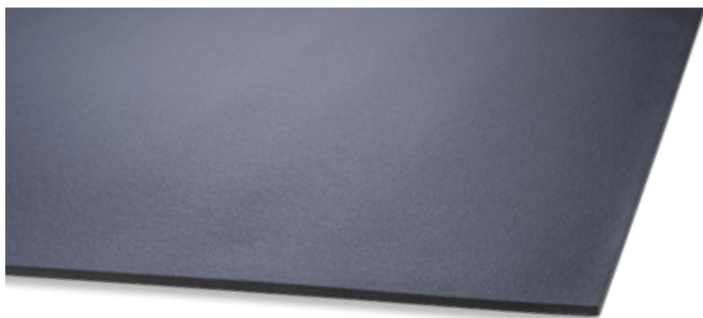

## ISOLMANT STRONG

FOR SOUNDPROOFING AND VIBRATION  
CONTROL.

Materassino in Isolmant ad elevata densità (circa 70 kg/m<sup>3</sup>) per applicazioni particolari, ove sia richiesta una elevata resistenza a compressione, anche in strutture non residenziali.

✂ **Nominal thickness: 6 mm**

For more  
information visit  
the product page



CODE	Description	Size	Pack	€/m <sup>2</sup>
ISOL1406N50	Isolmant Strong	1.50 m x 50 m rolls	75 m <sup>2</sup> (1 roll)	16.90

## BONDING AND CUTTING



Depending on the type of material (standard, density, thickness, etc.), it is possible to request adhesive coating on one side or both sides and longitudinal cutting (in strips), indicating this in due time before ordering. The time required for the requested processing will be communicated on a case-by-case basis. The minimum quantity that can be processed is one roll or one package.

CODE	Description	€/m <sup>2</sup>
60ADES	Adhesive bonding for all thicknesses (if possible on product)	1.80 net
60TAGLIO	Longitudinal cut (in strips) (if possible on the product)	+ 10%*

\*Note: The surcharge for cutting is to be applied to the list price of the standard size material.

# TRANSPORT CONDITIONS AND PAYMENT METHODS

We prefer to quote prices excluding transport, the costs of which will be covered by the buyer. It is also possible to request quotations that include transport to the final destination, in which case the transport costs will be indicated on the invoice

## SPECIAL CONDITIONS

<b>4YOU line by Isolmant (IsolGypsum range)</b>	All versions with Idro, D+ Salus and D+ Resisto sheets, both in the price list formats and in particular formats require delivery times to be agreed with the customer office and payment in advance.
<b>Custom made products</b>	Any special and/or customized product and/or which has any type of variation compared to what is specifically indicated in the price list (non-standard) requires delivery times to be agreed with the customer office and payment in advance.

### NOTE

The information provided is based on our best current experience, but is still indicative. The user will be responsible for determining whether the product is suitable for its intended use and for assuming all responsibility associated with its use.

The technical information in this document replaces previous technical information.

Tecnasfalti reserves the right to change product sizes and packaging without notice.

**For more information, please visit [www.isolmant.it](http://www.isolmant.it)**

**Due to the unstable market situation related to the increase in raw material costs, energy costs, and additional production and transport costs, the price list may be subject to price changes during the year, either for a single product or for some products, with immediate effect at the time of communication.**

to place an order:  
[export@isolmant.it](mailto:export@isolmant.it)

for sales information:  
[export@isolmant.it](mailto:export@isolmant.it)

for technical information on products:  
[tecnico@isolmant.it](mailto:tecnico@isolmant.it)

for general information:  
[export@isolmant.it](mailto:export@isolmant.it)

Follow us on



[www.isolmant.it/en](http://www.isolmant.it/en)  
[www.sistemapavimento.it](http://www.sistemapavimento.it)  
[www.isolmant4you.it](http://www.isolmant4you.it)

# ISOLMANT

A world of acoustic **comfort**



## Tecnasfalti

Via dell'Industria, 12 | 20074 Carpiano (MI)  
VAT 01043991007 | TAX CODE 02328560582

isolmant.it | export@isolmant.it  
Tel. +39 029885701 | fax +39 0298855702

