





PRICE LIST

BUILDING - March 2022

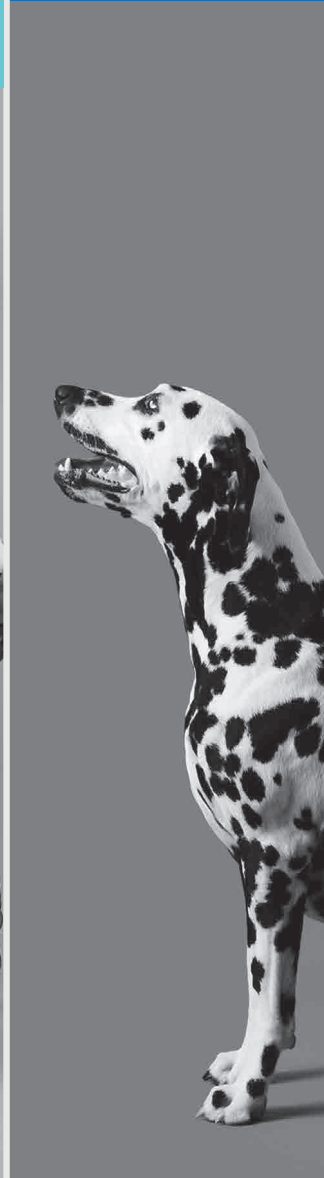

isolmant



ABOUT US

Since 1976, Tecnasfalti has been a successful player in the construction market: a leader in acoustic & thermal insulation. A strong and relevant presence that has always been characterised by innovative construction systems and products, which has strongly encouraged the introduction and promotion of new concepts that today are particularly appreciated by all those involved in the construction and building industry.

Tecnasfalti provides operators of the construction industry with a range of innovative solutions for acoustic and thermal insulation. Always committed to developing the new solutions, Tecnasfalti is always in the field alongside designers, companies and final customers to support them in finding the best solution for their needs. Tecnasfalti is a full-service company for quality constructions.

- over 70 different solutions
- 56 Countries serviced worldwide
- more than 100 million m³ of insulating underlay sold
- 7,000 sqm warehouse
- more than 10 product developments launched on the market

REFERENCE

- **Designers/Engineers**
They appreciate the quality of our products and the expertise of our technicians
- **Retailers**
They promote our products: not simple retailers but part of the sales operations system
- **Companies**
They appreciate our products' distinctive features and their easy installation
- **Individual users**
They experience the acoustic comfort of our Isolmant solutions

OUR WEBSITE

isolmant.it
sistemapavimento.it
isolmant4you.it
isolSPACE.it

isolmant

BUSINESS EXPERIENCES

Leader in acoustic insulation

Leader in the sector for 40 years thanks to a wide range of innovative products

- Isolmant | 1976 - to date

EXPERTISE

- Underscreed
- Underlay
- Solutions for airborne noise
- New buildings
- Renovations

OBJECTIVES



Car owners - Promotional Events

Isolmant is well-known for its training offer. We annually propose and organise a large number of events throughout the country: workshops, conferences and seminars thanks to which we are able to spread our know-how. In addition to presence training programmes, Isolmant also proposes a rich calendar of on-line conferences.

GENERAL INFO


- Via dell'Industria, 12
Loc. Francolino - 20074 Carpiano (MI)
- +39 02 9885701
- marketing@isolmant.it

SOCIAL

- Isolmant SistemaPavimento
- Isolmant
- Tecnasfalti Isolmant
- Tecnasfalti

I N D E X

APPLICATION	PRODUCT	PAGE
IMPACT SOUND		
Under screed insulation	Isolmant Special	11
	Isolmant Special Plus	11
	Isolmant UnderPlus Black.E	12
	Isolmant Radiante	12
	Isolmant UnderSpecial	13
	Isolmant UnderSpecial EVO	13
	Isolmant UnderSpecial EVO BV	13
	Isolmant BiPlus	14
	Isolmant Super BiPlus	14
	Isolmant Fibra HD	15
	Isolmant D311	15
Under screed and under flooring insulation	Isolmant IsolTile Classic	17
	Isolmant IsolTile AD	17
	Isolmant IsolTile BV	17
Under flooring insulation	Isolmant 3mm Parquet	18
	Isolmant Special 2 mm Serie R	18
	Isolmant Parquet Film	18
	Isolmant Top	19
	Isolmant Top Incollapavimento	19
	Isolmant Cover	20
	Isolmant Cover Plus	20
Stairwell insulation	Kit Scale	21
Accessories	Isolmant Fascia Perimetrale Pratica	23
	Isolmant Fascia Perimetrale Stacca/Attacca	23
	Isolmant Fascia Perimetrale Tecnica Reticolata	23
	Isolmant Fascia Perimetrale Tecnica Doppio Spessore	24
	Isolmant Fascia Perimetrale Tecnica Radiante	24
	Isolmant Fascia Nastro	24
	Isolmant Nastro Telato	24
	Isolmant Nastro Alluminio	25
	Isolmant Angolo e Spigolo	25
	Isolmant Telaio Porte	25
AIRBORNE SOUND		
Insulation with cavity	Isolmant Polimuro	29
	Isolmant Perfetto Special	29
	Isolmant Polifibre Bloccarumore	29
	Isolmant Perfetto TR	31
	Isolmant Fascia Tagliamuro Standard/Strong	31

APPLICATION	PRODUCT	PAGE
AIRBORNE SOUND		
 Wall insulation with plasterboard	IsolGypsum Special	34 -35
	IsolGypsum Perfetto	36-37
	IsolGypsum Telogomma	38-39
	IsolGypsum Gomma XL	40
	Isolmant Fascia Tagliamuro IsolGypsum	40
	Isolmant Incollafacile	40
Insulating plasterboard linings and wall	Isolmant Perfetto CG	41
	Isolmant Setto Acustico Fibra	42
	Isolmant Setto Acustico CG	43
EXTERNAL NOISE		
Insulation of small elements of the facade	Isolmant Tubo HP	45
	Isolmant Tubo	45
Roller shutter insulation	Isolmant Telogomma Cassonetti	45
EQUIPMENT NOISE		
Equipment noise	Isolmant Telogomma Tubi	47
MASSIVE PRODUCTS		
	Isolmant Telogomma	49
	Isolmant Telogomma E+45	49
	Isolmant Telogomma TT	49
	Isolmant Cemento Armato	50
	Isolmant Damp	50
	Isolmant Strong	50
	Adhesive film and trim	52
	Shipping terms and conditions	52

N.B.

Due to the unstable market situation linked to the increase in the costs of raw materials, energy and ancillary production and transport, the price list during the year could undergo variations even for the cost of a single product, or a few products originated from the same raw material, with immediate effect at the time of communication.

WE BUILD OUR GREEN PLANET TOGETHER

Sustainability for Isolmant is a world of daily gestures. A look at a future that is built with the actions of the present. A path that we have undertaken and that we follow day after day with greater responsibility, and with the awareness that the journey is as important as the destination.

RESEARCH AND DEVELOPMENT

Isolmant's Research & Development department works every day with two important focuses: sustainability of its solutions and the well-being of those who live there. With these goals in mind, new products are designed and existing ones improved. A daily research that is not only attentive to new technologies but even anticipates them, thanks to constant collaboration with Italian major universities and with European research institutes.

The technicians of Isolmant, engaged in research for the tomorrow's products, are also engaged daily in the field for the products of today, alongside the designer, the company or the end customer, to help him in the choice that best suits his needs. A full service in favor of correct and good construction.

Isolmant solutions follow the GreenPlanet philosophy with products that respect living beings and the environment:

- Sustainable
- Ecological
- Recyclable
- Low environmental impact productionConsumo energetico ridotto
- Reduced energy consumption
- Reduction of waste

Isolmant and Italian CAM

The objective of the CAM (Criteri Ambientali Minimi - Minimum Environmental Criteria) is to make the national policy on public procurement more effective "Green", promoting sustainable production and consumption models and circular economy, enhancing quality environmental and compliance with social criteria.

Isolmant products are developed in accordance with the requirements of the Minimum Environmental Criteria for materials for acoustic and thermal insulation in relation to the percentage of recycled materials and the absence of hazardous substances.

They are also VOC A + certified (certifying the absence of volatile organic compound), a characteristic that qualifies the product for the purpose of obtaining credits for the environmental certification of a building according to the protocols LEED or ITACA.



ECOLOGICAL



SUSTAINABLE



NON-TOXIC



HEALTHY

PRODUCT AND PROCESS SUSTAINABILITY

All Research and Development actions aimed at improving, update, certify and innovate our production and our offer to the market



ENVIRONMENTAL SUSTAINABILITY

All actions taken and aimed at reducing our company ecological footprint and to reduce CO₂ emissions



CORPORATE RESPONSIBILITY

All business choices that respect the principles of responsibility and transparency in company management, in choice of suppliers and in customer relations



SOCIAL RESPONSABILITY

All the choices to support the realities of the area, the approach to corporate welfare and the spread of ours know-how to the market



SUSTAINABILITY OF PRODUCT AND PROCESS

All Isolmant Research & Development activities are aimed at improving, updating, certifying and innovating the range of products and solutions offered to the market.

The characteristics of our products are periodically tested to ensure high technical characteristics and high characteristics of healthiness, as well as the maximum possible performance.

OUR PRODUCTS CERTIFICATIONS

QUALITY CERTIFICATES:

- Acoustic certificates
- Reaction to fire certificates
- Reflected Walking Sound (RWS)
- Heat resistance

HEALTH CERTIFICATES:

- VOC
- Blue Angel
- Indoor Air Comfort Gold

CERTIFICATI DI SOSTENIBILITÀ:

- Content certificates of recycled subscribed by ICMQ
- ISCC PLUS

FIND OUT MORE ABOUT OUR CERTIFICATIONS



Indoor Air Comfort Gold certifies the lowest VOC emissions in category a guarantee of the best indoor air quality, ensuring the compliance of products to EU specifications, to the criteria imposed by the most relevant ecological labels and international certifications of sustainable buildings such as LEED, BREEAM etc.



www.blauer-engel.de/uz156

The German Blue Angel eco-label, born in 1978, is among the most recognized product certifications at European level. It defines rigorous standards for selection of products with high requirements in terms of sustainability and performance.



Certificate issued by the certification body ICMQ, certifying the values regarding the material content recycled and / or recovered and / or by-product through the clarification of mass balance and in compliance with ISO 14021.



THE GREEN GENERATION PROJECT

With the Green Generation project, Isolmant's Research & Development has conducted important studies on the possibility of make a bio-based cross-linked polyethylene foam. Following this aim, we are introducing in our production materials for acoustic insulation a raw material of non-fossil origin that keep the same promise of comfort and quality as the rest of the Isolmant range.

THE MILES STONES OF THE PROJECT

- **Continuous research on raw materials:**
use of new raw materials and alternatives to fossil fuels as required by the 2030 SDGs (Sustainable Development Goals);
- **Optimization of the supply chain of raw materials:**
soil protection, use of renewable sources, recovery of raw materials avoiding deforestation and competition with food crops;
- **Sustainable logistics chain:**
local procurement, certification of raw materials, processes and products;
- **Reduction of hazardous emissions:**
reduction of CO₂ and consumption of non-renewable energy.

CERTIFIED SUSTAINABLE PRODUCTION



ISCC is a world-leading certification system that aims to contribute the implementation of environment, social and economical sustainable production and use of all types of biomass in global supply chains.

ISCC certification confirms the highest sustainability requirements for the production, logistics and distribution chain by Isolmant. ISCC PLUS certifies the entire raw material supply chain made from non-fossil sources.



FIND OUT MORE
on the Green project
Generation
by visiting our site

DOWNLOAD the
brochure dedicated
to the project



IMPACT **SOUND**



ISOLMANT SPECIAL

THE CORE PRODUCT FOR ACOUSTIC INSULATION.

Second-generation Isolmant with embossed and screen-printed upper side, featured by a better and calibrated quality of the polyethylene cellulation. To be installed with the embossed and screen-printed side facing upwards.

◆ Nominal Thickness: 3 - 5 - 10 - 15 mm

10- and 15-mm thick products
come with their overlapping fabric



www.blauer-engel.de/uz156



CODE	Description	Size	Package	€/m ²
ISOL03NS	Isolmant Special 3 mm	rolls of 1.50 m x 50 m	75 m ² (1 roll)	4.30
ISOL05NS50	Isolmant Special 5 mm	rolls of 1.50 m x 50 m	75 m ² (1 roll)	7.20
ISOL10NS	Isolmant Special 10 mm	rolls of 1.50 m x 50 m	75 m ² (1 roll)	15.10
ISOL15NS	Isolmant Special 15 mm	rolls of 1.50 m x 30 m	45 m ² (1 roll)	22.60

ISOLMANT SPECIAL PLUS

FIBRE REINFORCED ISOLMANT SPECIAL FOR ENHANCED ON-SITE PERFORMANCE

Second-generation 5 mm Isolmant featured by a better and calibrated quality of the polyethylene cellulation.


This product is joined to FIBTEC XT1 a reinforced screen- printed fabric which is anti-tearing and makes Isolmant special high resistance to foot traffic and tearing.

To be positioned with the fibre reinforced fabric facing upwards.

◆ Nominal Thickness: 5 mm



CODE	Description	Size	Package	€/m ²
ISOLSPECIALPLUS	Isolmant Special Plus 1.50X50	rolls of 1.50 m x 50 m	75 m ² (1 roll)	8.20

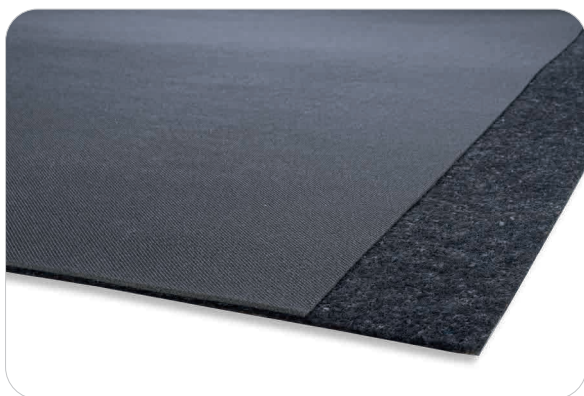ISOLMANT UNDERPLUS BLACK.E**THE MOST COST-EFFECTIVE DOUBLE LAYER PRODUCT.**


Product made of 3 mm Isolmant joined on the underside to FIBTEC XF1 (special needle-worked fibre produced according to specifications designed to provide a better noise reduction).

To be positioned with the fibre side facing down.

◆ Nominal Thickness: 6 mm



CODE	Description	Size	Package	€/m ²
ECOUNPLUSBL.E	Isolmant UnderPlus Black.E	rolls of 1.50 m x 50 m	75 m ² (1 roll)	7.90
ECOUNPLUSBL.25	Isolmant UnderPlus Black.E	rolls of 1.50 m x 25 m	37.5 m ² (1 roll)	8.10

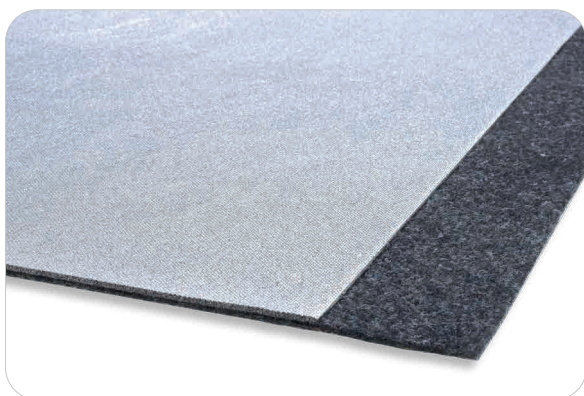ISOLMANT RADIANTE**THIS PRODUCT IS SUITABLE FOR HOT WATER UNDERFLOOR HEATING.**


Product made of 5 mm Isolmant joined on the upper side to a radiant tear-proof, embossed and aluminate film and on the underside to FIBTEC XF1 (special needle-worked fibre produced according to specifications designed to provide a better noise reduction). This product comes with overlaps for an easy installation. To be installed with the aluminate-coated side facing upwards. For a better system efficiency, it is recommended to use this product together with Isolmant Fascia Perimetrale Radiante in case of a hot water underfloor heating.

◆ Nominal Thickness: 8 mm



CODE	Description	Size	Package	€/m ²
ISOLRADIANT	Isolmant Radiante	rolls of 1.50 m x 25 m	37.5 m ² (1 roll)	12.40
ISOLRADIANT50	Isolmant Radiante	rolls of 1.50 m x 50 m	75 m ² (1 roll)	12.10

ISOLMANT UNDERSPECIAL

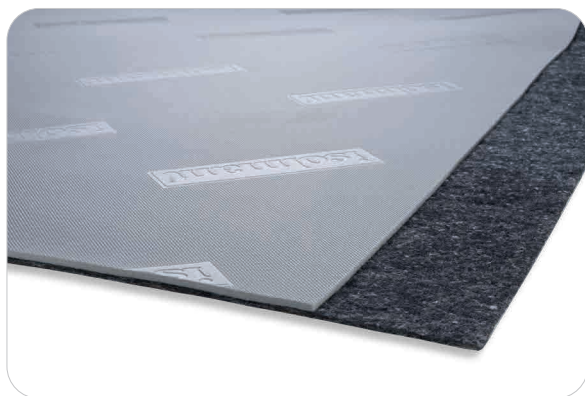

TOP-OF-THE-LINE DOUBLE LAYER PRODUCT FOR UNDER SCREED ACOUSTIC INSULATION.

Product made of 5 or 10 mm Isolmant Special joined on underside to FIBTEC XF1 (special needle-worked fibre produced according to specifications designed to provide a better noise reduction). This product comes with overlaps for an easy installation. To be positioned with the fibre side facing down.

◆ Nominal Thickness: 8 - 13 mm



CODE	Description	Size	Package	€/m ²
UNDERSPECIAL8	Isolmant UnderSpecial 8 mm	rolls of 1.50 m x 50 m	75 m ² (1 roll)	11.80
UNDERSPECIAL8.25	Isolmant UnderSpecial 8 mm	rolls of 1.50 m x 25 m	37.5 m ² (1 roll)	12.20
UNDERSPECIAL13	Isolmant UnderSpecial 13 mm	rolls of 1.50 m x 25 m	37.5 m ² (1 roll)	19.60

ISOLMANT UNDERSPECIAL EVO



ISOLMANT TECHNOLOGY FOR STRUCTURES WITH LOW THICKNESS SCREEDS (BETWEEN 3 AND 5 CM).


Product made of HD 1.5 mm Isolmant joined on the underside to FIBTEC XF2 (special needle-worked fibre produced according to specifications designed to provide a better noise reduction). To be positioned with the fibre side facing down.

◆ Nominal Thickness: 4 mm



CODE	Description	Size	Package	€/m ²
UNDERSPECIAL EVO	Isolmant UnderSpecial EVO	rolls of 1 m x 20 m	20 m ² (1 roll)	11.80

ISOLMANT UNDERSPECIAL EVO BV

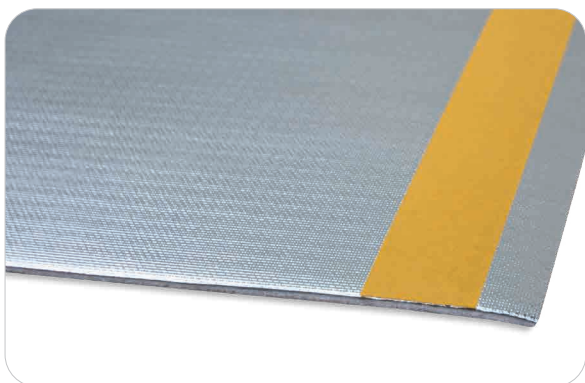

UNDERSPECIAL EVO VAPOUR BARRIER, WITH 10 CM OVERLAPPING FABRIC AND ADHESIVE TAPE.


Product made of high density 1.5 mm Isolmant joined on the underside to FIBTEC XF2 (special needle-worked fibre produced according to specifications designed to provide a better noise reduction). Isolmant UnderSpecial EVO comes with reflecting side that acts as protection against vapour. To be positioned with the fibre side facing down.

◆ Nominal Thickness: 4 mm



CODE	Description	Size	Package	€/m ²
UNDERSPECIAL EVO BV	Isolmant UnderSpecial EVO BV	rolls of 1 m x 20 m	20 m ² (1 roll)	15.20

ISOLMANT BIPLUS

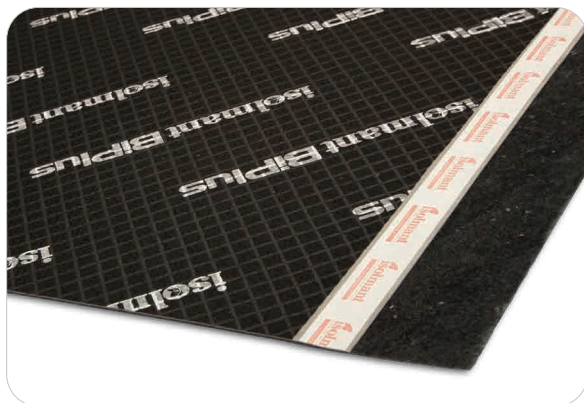

TOP RANGE PRODUCT WITH SPECIAL ANTI TEARING TECHNICAL FABRIC. ALLOWS TO OBTAIN HIGH ACOUSTIC SPECIFIC FOR UNDERFLOOR SOUND INSULATION IN SINGLE-LAYER STRUCTURES.

High performance resilient layer made of 5 or 10 mm polyethylene Isolmant Special joined on the upper side to FIBTEC XT1 FIBRE-REINFORCED (screen printed anti-tearing fibre). Equipped with self adhesive overlap for joining and sealing the sheets.

To be installed with the screen-printed side facing upwards.

◆ Nominal Thickness: 9 - 14 mm



CODE	Description	Size	Package	€/m ²
ISOL9BPLUS	Isolmant BiPlus 9 mm	roll of 1.50 m x 50 m	75 m ² (1 roll)	15.50
ISOL14BPLUS	Isolmant BiPlus 14 mm	roll of 1.50 m x 25 m	37.5 m ² (1 roll)	23.30

ISOLMANT SUPER BIPLUS



FOR THE ACOUSTIC INSULATION OF LIGHT INSTALLATIONS THAT REQUIRE MORE MASS CAPACITY.

Product made of 5 mm Isolmant Special joined on the underside to FIBTEC XF1-EL (high performance elastic needle-worked fibre) and on the upper side to Isolmant TeloGomma (specially calibrated in the massive value) coated with an anti-tearing TNT sheet.

To be positioned with the rubber side facing upwards.

◆ Nominal Thickness: 10 mm



CODE	Description	Size	Package	€/m ²
ISOL10SUPBPLUS	Isolmant Super BiPlus 1x10	roll of 1 m x 10 m	10 m ² (1 roll)	22.30

ISOLMANT FIBRA HD

FOR THE ACOUSTIC INSULATION IN DRY INSTALLATIONS AND/OR WITH WOODEN SLABS EVEN UNDER SCREED.

Product made of a FIBTEC PHD polyester fibre panel (140 kg / m³), for impact sound insulation, in particular with dry screed system.
Non toxic, ecological, with unlimited duration.

● Nominal Thickness: 10 mm



CODE	Description	Size	Package	€/m ²
ISOLDRYSCREED10	Isolmant Fibra HD 10 mm thk.	panels of 1.0 m x 1.20 m	packs of 15 panels (18 m ²)	24.80

ISOLMANT D311

FOR ACOUSTIC AND THERMAL INSULATION, IN PARTICULAR FOR PILOTIS LEVELS.

This product consists of double-layer Isolmant joined on the upper side to a high resistance aluminate embossed anti-tearing film.
To be installed with the aluminate-coated side facing upwards.

● Nominal Thickness: 22 mm



CODE	Description	Size	Package	€/m ²
ISOLD311	Isolmant D311	panels of 1 m x 1.50 m	packs of 15 panels (22.5 m ²)	26.40

isolmant
isoltile
www.isolmant.it



**ISOLTILE PERFECT FOR
RENOVATION PROJECTS**

Isolmant IsolTile is a resilient acoustic layer featured by elastic and dynamic strength. This product is disjointing and reinforcing acoustic insulation and it is designed for under screed and under floor applications (over tile or wooden flooring). Today this product is available in three versions designed to meet the needs of specific applications.

ISOLMANT ISOLTILE CLASSIC



Isolmant IsolTile Classic is made of HD expanded polypropylene material which is coated on both sides with special Isolmant screen-printed, black FIBTEC XP1 (black screen-printed and calendered polypropylene fabric for technical application).

This version comes with:

- Fascia per giunte (h 7.5 cm x 20 m)
- Fascia perimetrale (h 3 cm x L 20 m)



● Nominal Thickness: 2 mm



CODE	Description	Size	Package	€/m ²
ISOL2TILE	IsolTile Classic	rolls of 1 m x 20 m	20 m ² (1 rotolo)	20.70

ISOLMANT ISOLTILE AD



Isolmant IsolTile AD is made of HD expanded polypropylene material which is coated on upper side with special FIBTEC XP1 fabric (black screen-printed and calendered polypropylene fabric for technical application) and removable adhesive on the lower side for installations on the existing flooring.

This version comes with:

- Fascia per giunte (h 7.5 cm x 20 m)
- Fascia perimetrale (h 3 cm x L 20 m)



● Nominal Thickness: 2 mm



CODE	Description	Size	Package	€/m ²
ISOL2TILEADSA	IsolTile AD adesivo	rolls of 1 m x 20 m	20 m ² (1 roll)	21.40

ISOLMANT ISOLTILE BV



Isolmant IsolTile BV is made of HD expanded polypropylene material which is coated on upper side with special FIBTEC XP1 fabric (black screen-printed and calendered polypropylene fabric for technical application) and on the underside with FIBTEC XF2 (black screen-printed and calendered polypropylene fabric with an integrated protection against vapour - $S_d > 40$ m).

This version comes with:

- Fascia per giunte (h 7.5 cm x 20 m)
- Fascia perimetrale (h 3 cm x L 20 m)



● Nominal Thickness: 2 mm



CODE	Description	Size	Package	€/m ²
ISOL2TILEBV	IsolTile BV	rolls of 1 m x 20 m	20 m ² (1 roll)	23.40

PRODUCTS TO INSTALL UNDER WOODEN, LAMINATE AND LVT FLOORING


ISOLMANT 3 mm PARQUET



CLASSIC PRODUCT FOR FLOATING INSTALLATION OF WOODEN AND LAMINATED FLOORING.

HQPO polyethylene insulating underlay with embossed and screen-printed upper side. To be installed with the embossed and screen-printed side facing upwards.

◆ Nominal Thickness: 3 mm



www.blauer-engel.de/uz156

CODE	Description	Size	Package (pallet)	€/m²
ISOL03SH1L20	Isolmant 3 mm Parquet	rolls of 1.05 m x 20 m	252 m² (12 roll)	4.60

■ Note: the product can be ordered in pallets (no loose rolls)

ISOLMANT SPECIAL 2 mm SERIE R




ISOLMANT SPECIAL R SERIES FROM RENEWABLE SOURCES, FOR SOUND INSULATION UNDER FLOATING FLOORING

Isolmant Special Series R polyethylene insulating mat, completely sustainable and from renewable sources, characterized by a better and calibrated quality of polyethylene cellulation.

To be laid with the embossed and screen-printed side facing up

◆ Nominal Thickness: 2 mm



www.blauer-engel.de/uz156

CODE	Description	Size	Package (pallet)	€/m²
ISOL02GREEN15	Isolmant Special 2 mm Serie R	rolls of 1.00 m x 15 m	360 m² (24 roll)	6.00

■ Note: the product can be ordered in pallets (no loose rolls)

ISOLMANT PARQUET FILM



FOR THE ACOUSTIC INSULATION WITH AN INTEGRATED PROTECTION AGAINST VAPOUR.

High Density NPE Polyethylene insulating underlay coated by a high vapour resistance PE film. The product comes with adhesive fabric to connect and seal the sheets.


To be installed with the film facing upwards.

◆ Nominal Thickness: 2 mm

CODE	Description	Size	Package (pallet)	€/m²
ISOLPARQUETFILM	Isolmant Parquet Film	rolls of 1 m x 15 m	300 m² (20 roll)	4.40

■ Note: the product can be ordered in pallets (no loose rolls)


ISOLMANT TOP

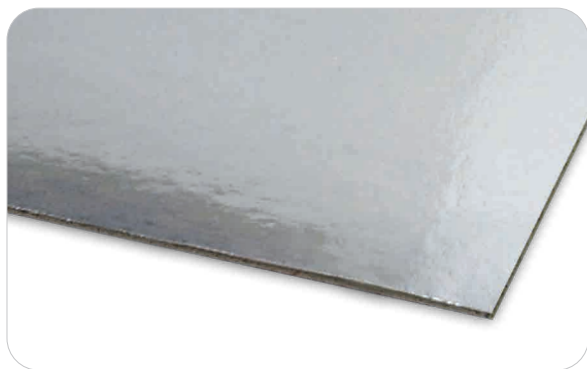

THE MOST COMPLETE, UNIVERSAL AND MULTIPURPOSE PRODUCT FOR UNDERFLOOR INSTALLATIONS. MASSIVE PRODUCT, WITH FIRE REACTION CLASS SUITABLE IN CASE OF WATER UNDERFLOOR HEATING. 100% NATURAL PRODUCT WITH BLUE ANGEL ECOLABEL.

Insulating underlay made of HD thermal-conductive viscoelastic material, coated with an aluminated film to prevent rising moisture. To seal Isolmant Top sheets it is recommended to use this product together with Isolmant Nastro Alluminio.


◆ Nominal Thickness: 1.8 mm



CODE	Description	Size	Package (pallet)	€/m²
ISOLMANTOP1,8	Isolmant Top	rolls of 1 m x 8.5 m	340 m² (40 roll)	9.60

■ Note: the product can be ordered in pallets (no loose rolls)


ISOLMANT TOP INCOLLAPAVIMENTO

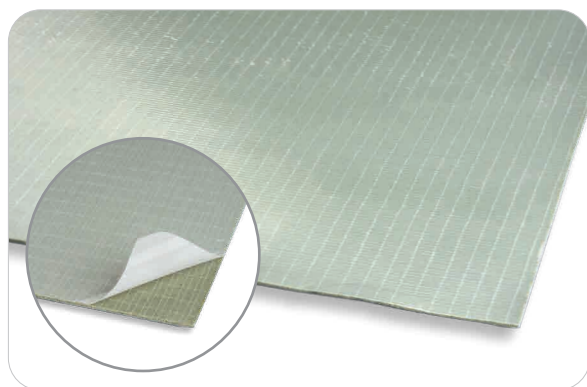

INSTALLING WITHOUT GLUE THANKS TO THIS INNOVATIVE PRODUCT FOR A WATERPROOF HYBRID LAYING THAT COMBINES THE STABILITY OF A GLUED INSTALLATION WITH A QUICK AND CLEAN FLOATING LAYING.

Insulating underlay made of high density thermally conductive viscoelastic material. The product adhesive-coated and protected by a silicon film is designed for wooden and laminate flooring.

◆ Nominal Thickness: 1.8 mm



CODE	Description	Size	Package (pallet)	€/m²
ISOLMANTOP1,8AD	Isolmant Top AD adesivo	rolls of 1 m x 6.5 m	260 m² (40 roll)	20.10

■ Note: the product can be ordered in pallets (no loose rolls)

NOT JUST A SIMPLE PRODUCT BUT A COMPLETE AND EFFECTIVE INSTALLATION SYSTEM!

Isolmant Top Incollapavimento is a clean, efficient and rapid method of installation. Its adhesive layer, which has been specifically designed for laying wooden flooring, laminates and LVT, ensures that the flooring is fixed directly onto the underlay without gluing. Isolmant Top Incollapavimento is suitable also for hot/cold water underfloor heating systems and it is a 100% natural product with Blue Angel ecolabel.



Installation
tutorials



ISOLMANT COVER



Protective, anti-split cover made of non-woven PE coated with a resistant, waterproof-breathable film.

◆ Nominal Thickness: 2.5 mm



CODE	Description	Size	Package	€/m ²
ISOLCOVER	Protective, anti-split cover 1 x 25	rolls h 1 m x 25 m (25 m ²)	pallets of 15 rolls (375 m ²)	4.60

ISOLMANT COVER PLUS



Protective, anti-split cover made of non-woven fabric coated with a waterproof-breathable blue film (70 g/m²/24h).

◆ Nominal Thickness: 2.5 mm



CODE	Description	Size	Package	€/m ²
ISOLCOVERPLUS	Protective, anti-split 1 x 25	rolls h 1 m x 25 m (25 m ²)	pallets of 15 rolls (375 m ²)	5.40

ISOLMANT KIT SCALE



Isolmant Kit Scale consists of standard IsolTile sheets for risers, steps and intermediate ledges, to be trimmed on site to adapt them to the specific surface. This KIT also contains all the accessories such as the junction band to connect Isolmant sheets and the side band to disjoint the staircase from the stairwell, indispensable for completing the acoustic insulation.

The kit includes:

- Isolmant IsolTile Telo Pedata ▶ h 33 x 125 cm ▶ 22 items
- Isolmant IsolTile Telo Alzata ▶ h 20 x 125 cm ▶ 22 items
- Isolmant IsolTile Telo Ripiano ▶ h 50 x 125 cm ▶ 4 items
- Isolmant Fascia IsolTile ▶ h 7,5 cm x 20 m ▶ 5 items
- Isolmant Fascia Laterale ▶ h 18,5 cm x 25 m ▶ 1 items
- Isolmant Fascia Tagliabattiscopa ▶ h 3 cm x 15 m ▶ 2 items


◆ Nominal Thickness: 2 mm




CODE	Description	Package	€/box
ISOL2TILESCALE	Kit IsolTile Scale	1 box	364.80

The phenomenon of impact sound on the internal stairs of a building is commonly known, mainly in residential buildings, where all too often there is discomfort due to the propagation and amplification of the impact sound of people who do not use the elevator. The unique and very stiff conformation of the stairwell and staircase, in fact, generates noise due to structural reasons that are rarely controlled at the design stage, or during the construction of the building, both because of lack of construction solutions and regulatory gaps.

This problem can be solved by installing resilient sheets (IsolTile Classic), cut to size by lift, tread and intermediate shelves. The sheets are glued on any support, and the covering material is glued on them.

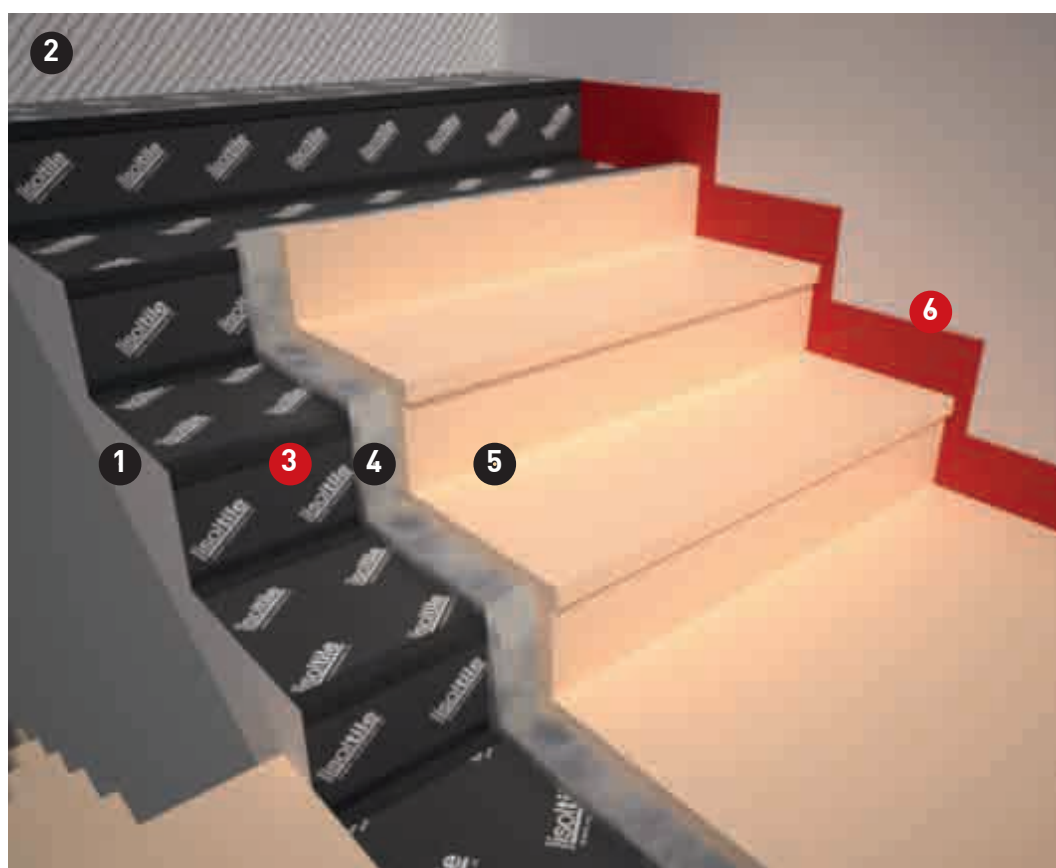

1. Staircase structure
2. Concrete glue
3. Isolmant Kit Scale
4. Concrete glue
5. Marble finish
6. Fascia Perimetrale Kit Scale

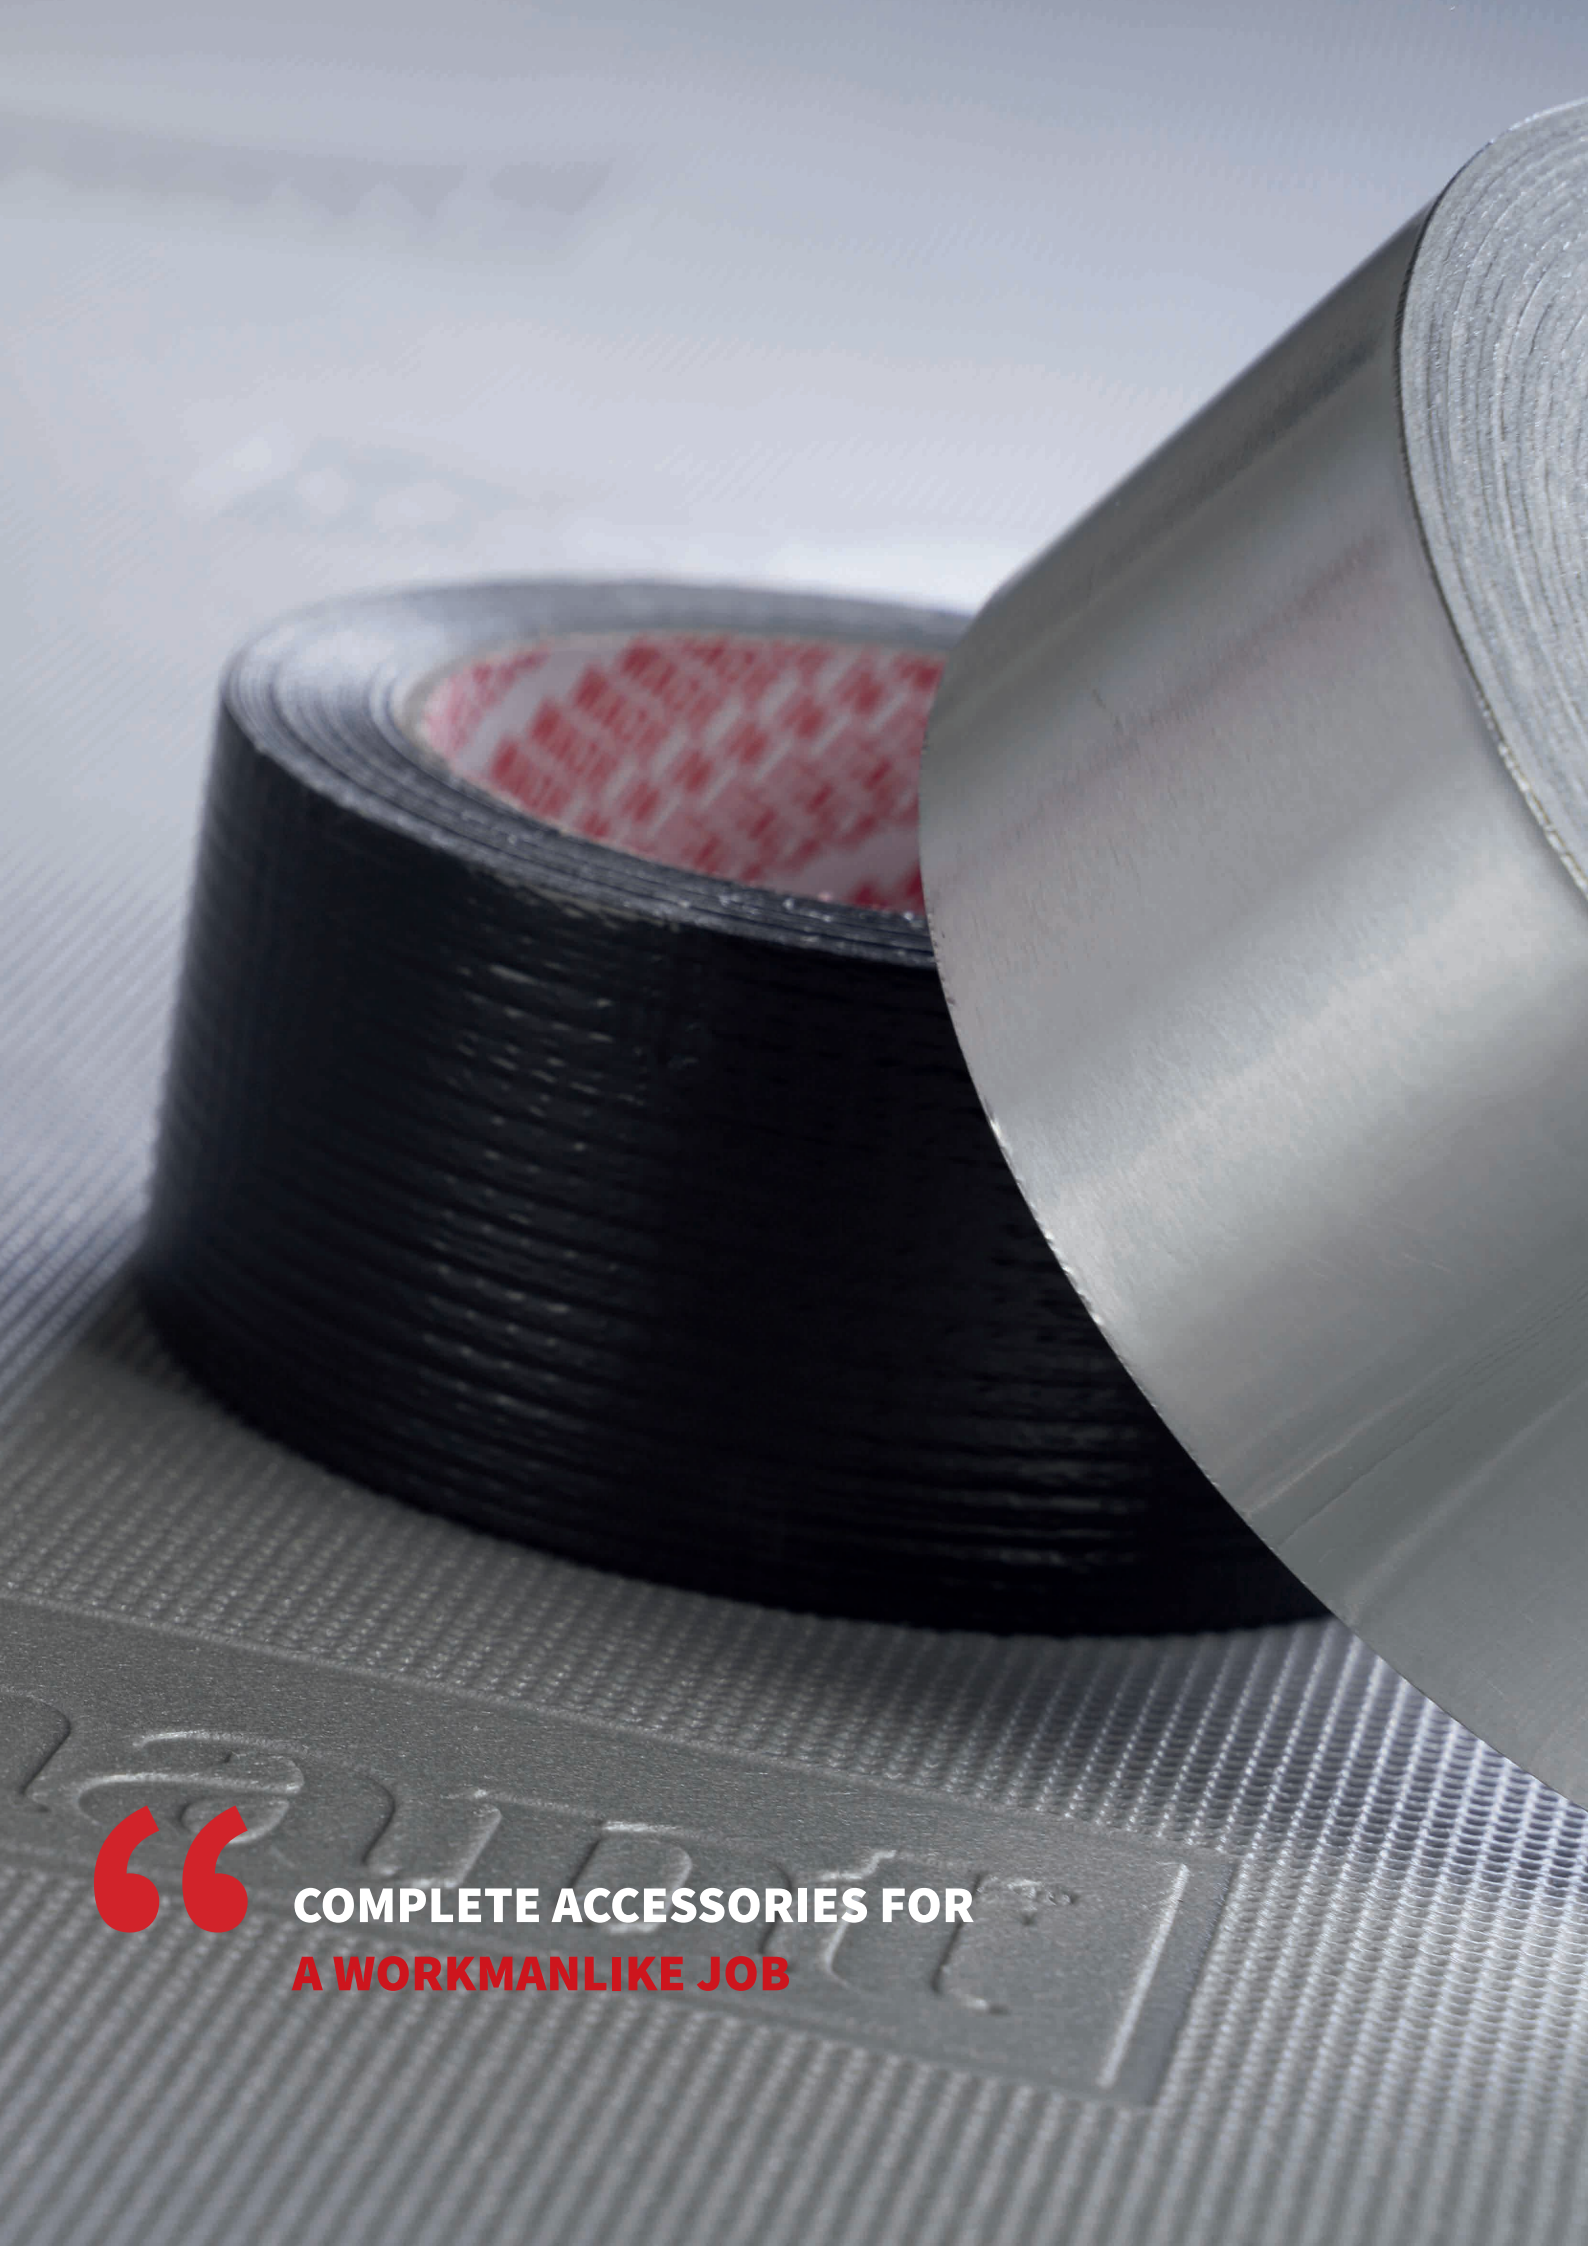

**COMPLETE ACCESSORIES FOR
A WORKMANLIKE JOB**

ISOLMANT FASCIA PERIMETRALE PRATICA



Adhesive bands in non-reticulated expanded polyethylene for an easy "L" installation. Available in sizes of h 15 cm and h 25 cm.

● Nominal Thickness: 5 mm

CODE	Description	Size	Package	€/m
FAPRATICPRM5H15	Fascia Perimetrale Pratica	15 cm x 50 m bands	10 bands = 500 m	1.60
FAPRATICPRM5H25	Fascia Perimetrale Pratica	25 cm x 50 m bands	6 bands = 300 m	2.20

ISOLMANT FASCIA PERIMETRALE STACCA/ATTACCA



15 cm adhesive bands made of physically reticulated expanded closed-cell polyethylene with Peel-and-Stick adhesive.

● Nominal Thickness: 3 mm

CODE	Description	Size	Package	€/m
FADISPRM3H15SA	Fascia Perimetrale Stacca/Attacca	15 cm x 100 m bands	10 bands = 1000 m	1.70

ISOLMANT FASCIA PERIMETRALE TECNICA RETICOLATA



FASCIA PERIMETRALE A "L" SHAPE FASCIA PERIMETRALE FOR EASY AND SAFE INSTALLATION.

Adhesive bands made of physically reticulated expanded closed-cell polyethylene with Peel-and-Stick adhesive for an easy "L" installation. Available in two sizes: 18.5 cm (11 cm on the wall and 7.5 cm on the slab) and h 25 cm (17.5 cm on the wall and 7.5 cm on the slab). These bands come with a screen-printed side with the installation instructions.

● Nominal Thickness: 5 mm

CODE	Description	Size	Package	€/m
FATECISOLPRM5AD	Fascia Perimetrale Tecnica reticolata	18.5 cm x 50 m bands	8 bands = 400 m	2.50
FATECISOL5H25AD	Fascia Perimetrale Tecnica reticolata	25 cm x 50 m bands	6 bands = 300 m	3.40

ISOLMANT FASCIA PERIMETRALE TECNICA DOPPIO SPESSORE

TECHNOLOGICALLY ADVANCED BAND WITH DOUBLE LAYER WHICH MAKES IT IDEAL ALSO IN LOW THICKNESS SYSTEMS.

Adhesive perimeter bands designed for an easy "L" installation, made of a vertical part in 5 m semi adhesive polyethylene to be applied to the wall and an horizontal one made of a 0.1 mm HDPE film with adhesive silicon paper on the lower side. Available in 28 cm (18 cm on the wall and 10 cm on the slab). These bands come with a screen-printed side with the installation instructions.

◆ Nominal Thickness: 5 mm

CODE	Description	Size	Package	€/m
FATECPRMDS	Fascia Perimetrale Tecnica doppio sp.	28 cm x 50 m bands	4 bands = 200 m	2.90

ISOLMANT FASCIA PERIMETRALE TECNICA RADIANTE

A BAND SPECIFIC FOR HOT WATER UNDERFLOOR HEATING.

White vertical bands in physically reticulated expanded closed-cell 8-mm thick and 15-cm high polyethylene. 7.5 cm adhesive bands, provided with transparent film to overlap the radiating panel. Product to be used with Isolmant Radiante.

◆ Nominal Thickness: 8 mm

CODE	Description	Size	Package	€/m
FARADIANT8H15	Fascia Perimetrale Radiante 8	15 cm x 50 m bands	8 bands = 400 m	2.00

ISOLMANT FASCIA NASTRO

TO TAPE THE UNDERLAY SHEETS, ENSURING A CORRECT ACOUSTIC SYSTEM.

7.5 cm Isolmant adhesive band. Suitable to joint Isolmant sheets together (suitable for all the under-screed range).

◆ Nominal Thickness: 3 mm

CODE	Description	Size	Package	€/m
NSAD3H7,5	Isolmant Fascia Nastro	7.5 cm x 50 m bands	4 bands = 200 m	0.90

ISOLMANT NASTRO TELATO

IDEAL FOR TAPING UNDERLAY SHEETS WHERE GREATER STRENGTH AND LESS THICKNESS ARE REQUIRED.

5 cm height HD aluminate adhesive strip. Suitable to joint Isolmant sheets together (suitable for the under-screed references).

◆ Nominal Thickness: < 1 mm

CODE	Description	Size	Package	€/m
NST	Isolmant Nastro Telato	rolls of 5 cm x 25 m	single rolls	15.50

ISOLMANT NASTRO ALLUMINIO



SPECIFIC TO STRUCTURES WITH HOT/COLD WATER UNDERFLOOR HEATING SYSTEMS; IT ENSURES CONTINUITY TO THE VAPOUR BARRIER.

5 cm height HD aluminium adhesive strip. Suitable for sealing all the sheets together, in particular Isolmant Radiante, Isolmant D311 and Isolmant Top.

◆ Nominal Thickness: < 1 mm

CODE	Description	Size	Package	€/rolls
NSTALU	Isolmant Nastro Alluminato	rolls of 5 cm x 50 m	single rolls	16.30

ISOLMANT ANGOLO E SPIGOLO



Special accessories made of pre-shaped and adhesive polyethylene to create corners.

◆ Nominal Thickness: 5 mm

CODE	Description	Size	Package	€/m
ISOLANGOLO	Isolmant Angolo (5 mm thk.)	50 pcs boxes (b 5 cm x h 10 cm)	1 box	221.60
ISOLSPIGOLO	Isolmant Spigolo (5 mm thk.)	50 pcs boxes (b 5 cm x h 10 cm)	1 box	221.60

ISOLMANT TELAIO PORTE



Special accessories in pre-shaped and adhesive polyethylene for application in correspondence of false frames. Inside opening approx. 11 cm.


◆ Nominal Thickness: 5 mm

CODE	Description	Size	Package	€/m
ISOLTELAIOPORTE	Isolmant Telaio Porte	30 pcs boxes (b 5 cm x h 10 cm)	1 box	176.30

ACOUSTIC ACCESSORIES

In the presence of pillars, doors and other movements of the walls, any Fascia Perimetrale Isolmant must be shaped without interruption to follow the perimeter faithfully of the premises. To make the installation of the "**Isolmant Acoustic System**" easier, faster and more effective, there are specific accessories that ensure the desolidarisation of the screed from the walls in correspondence with the closed corners (concave) or edges (open - convex corners). Adhesive isolmant **Angolo** and **Spigolo** and **Isolmant Telaio Porte** already pre-shaped to size avoid the cutting and bending operations of the Fascia Perimetrale in correspondence with non linear movements of the walls.

In the making of a floating under-screed it is always crucial to use Fascia Perimetrale, choosing the one best suited to the stratigraphy that is being put in place, and to use Isolmant Fascia Nastro for taping the sheets together.

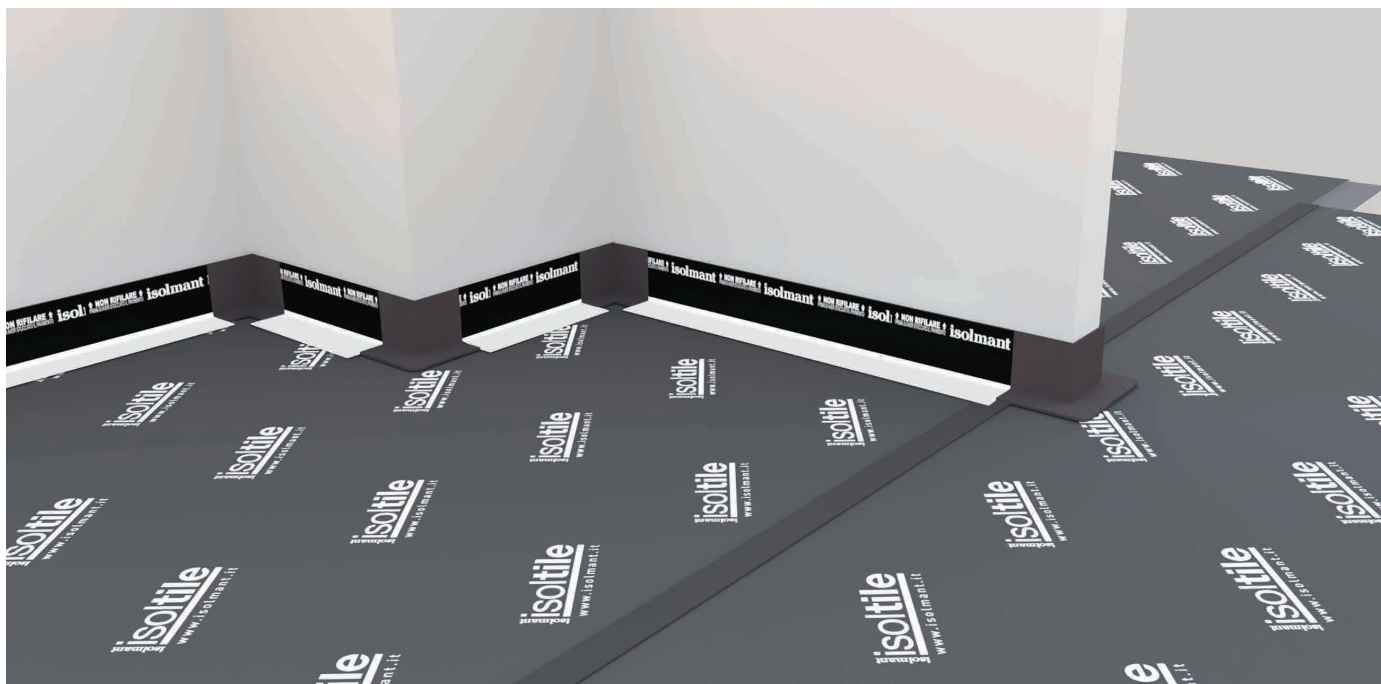

COMFORT SOLUTIONS OF THE HORIZONTAL STRUCTURES



The concept of the system is for Isolmant the basis of every reflection on the subject of living comfort: in the "floor system" the acoustic element works in synergy with the other elements of the structure to achieve the performance. On the sistemapavimento.it site you will find the Isolmant underfloor and under screed solutions that perfectly meet the needs of the market and many certified packages that can be downloaded for free.

>> FURTHER INFORMATION ON SISTEMAPAVIMENTO.IT



AIRBORNE **SOUND**



ISOLMANT POLIMURO



PRODUCT DESIGNED FOR THE ACOUSTIC INSULATION OF PARTITIONS WITH A REDUCED THICKNESS GAP.

Product made of 5 mm Isolmant joined on both sides to FIBTEC XF3 (special needle-worked fibre produced according to specifications designed to provide a better noise reduction).


This product comes with overlaps for an easy installation

◆ Nominal Thickness: 10 mm



CODE	Description	Size	Package	€/m ²
ISOLPOLIMURO25	Isolmant Polimuro	rolls of 1.5 m x 25 m	37.5 m ² (1 roll)	16.40
ISOLPOLIMURO	Isolmant Polimuro	rolls of 1.5 m x 50 m	75 m ² (1 roll)	16.00

ISOLMANT PERFETTO SPECIAL

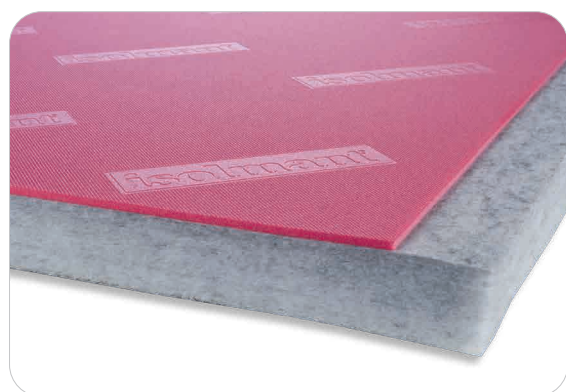

HIGH PERFORMANCES ARE COMBINED WITH THE EXTREME EASE OF INSTALLATION ON THE SITE, THANKS TO THE ADHESIVE BEATING AND THE LOAD-BEARING PANEL AT FULL HEIGHT. SPECIFIC FOR THE DIVIDING AND PERIMETER WALLS.

This product consists of a IsolFIBTEC PFT panel (recycled fibre of polyester for technical application whose density increase along the thickness. This fibre has high thermal and acoustic performance when joined to 5 mm Isolmant Special. Non-toxic, ecological, with unlimited duration. This product comes with overlaps and adhesive tape. Full-panel height for an easy installation.


To be positioned with the screen-printed side (logo Isolmant) in visible position.

◆ Nominal Thickness: 30 - 50 mm



CODE	Description	Size	Package	€/m ²
PERFETTO30BV	Isolmant Perfetto Special 30 mm	panels of 1 m x 2.85 m	packs of 10 panels (28.5 m ²)	34.60
PERFETTO50BV	Isolmant Perfetto Special 50 mm	panels of 1 m x 2.85 m	packs of 7 panels (19.95 m ²)	40.10

ISOLMANT POLIFIBRE BLOCCARUMORE

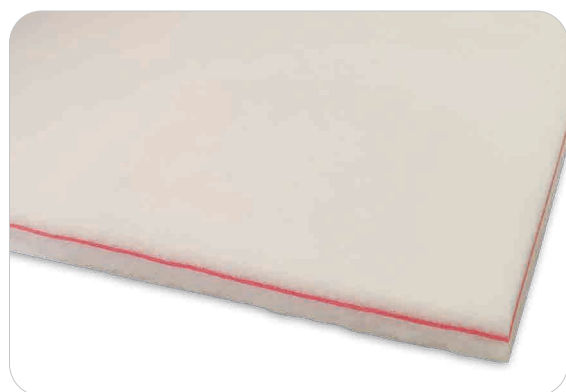

ALL THE ISOLMANT TECHNOLOGY (FIBTEC + SPECIAL) IN A PRODUCT FOR THE CAVITY WALLS SPECIFIC FOR RENOVATION. EASY TO INSTALL AND TO HANDLE.

This product consists of two ISOLFIBTEC EC panels (recycled fiber in polyester technical textile with high acoustic and thermal performances) each one 2 cm thick and an interposed red Isolmant Special layer. Non toxic, ecological, with unlimited duration. The product comes in roll to makes the application quick and easy; conceived for acoustic and thermal insulation of vertical partitions it must be placed into cavity wall.

◆ Nominal Thickness: 45 mm



CODE	Description	Size	Package	€/m ²
ISOLPOLIFIBRE	Isolmant Bloccarumore Polifibre h 0.6 x 6 m	rotolo da 0.6 x 6 m	pallets of 12 rolls (43,2 m ²)	19.90
ISOLPFIBREMAXI	Isolmant Bloccarumore Polifibre h 0.6 x 24 m	rotolo da 0,6 x 24 m	pallets of 3 rolls (43,2 m ²)	18.90

A close-up photograph of a cross-section of a concrete wall. A vertical crack runs down the center. A blue, fibrous reinforcement strip is embedded in the concrete, following the crack. The concrete is grey and textured, with some darker spots. The background is a blurred, warm-toned surface with circular patterns.

“

**FIBTEC:
YOU MUST HAVE THE RIGHT FIBRE
TO BE "PERFETTO"**

ISOLMANT PERFETTO TR



FIBTEC TECHNOLOGY IN A PRODUCT SPECIFIC TO PERIMETER WALLS.

This product consists of a IsolFIBTEC PFT panel (recycled fibre of polyester for technical application) whose density increase along the thickness. This fibre has high thermal and acoustic performance. Non-toxic, ecological, with unlimited duration. Full-panel height for an easy installation.
Reaction to fire: Euroclass B-s2,d0.


◆ Nominal Thickness: 30 - 50 mm (stored)



■ **Note:** Upon request (20 working days of notice), it is possible to order non-standard thickness and height products, for minimum mandatory quantities depending on the thickness.

CODE	Description	Size	Package	€/m ²
PERFETTO30TR	Isolmant Perfetto TR 30 mm	panels of 1 m x 2.85 m	packs of 10 panels (28.5 m ²)	25.80
PERFETTO50TR	Isolmant Perfetto TR 50 mm	panels of 1 m x 2.85 m	packs of 7 panels (19.95 m ²)	29.50

ISOLMANT FASCIA TAGLIAMURO STANDARD/STRONG

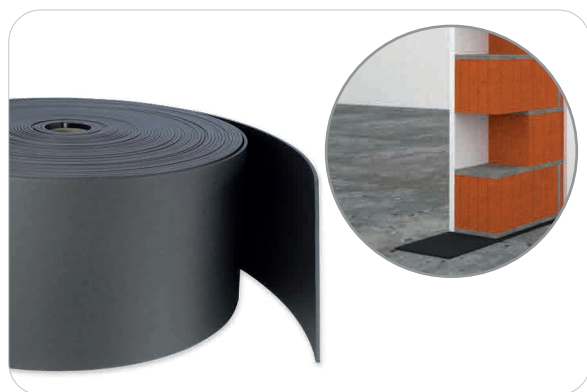

AVAILABLE IN DIFFERENT WIDTHS, INDISPENSABLE FOR A CORRECT SOUND SYSTEM OF THE WALLS.

HD Isolmant 10/15/30 cm bands: calibrated in its composition to work as an "acoustic spring" below the partitions and eliminate the transmission of noise from the wall to the slab and vice versa.

Available in two versions:

- Standard from 50 kg/m³ for light partition wall insulation;
- Strong from 70 kg/m³ for strong partition wall insulation.

◆ Nominal Thickness: 4 mm (Standard) and approx. 6 mm (Strong)

CODE	Description	Size	Package	€/m
FASTGM10	Isolmant Fascia Tagliamuro Standard (4 mm thk.)	10 cm x 50 m bands	15 rolls = 750 m	1.20
FASTGM15	Isolmant Fascia Tagliamuro Standard (4 mm thk.)	15 cm x 50 m bands	10 rolls = 500 m	1.80
FASTGM30	Isolmant Fascia Tagliamuro Standard (4 mm thk.)	30 cm x 50 m bands	5 rolls = 250 m	3.60
FASTGM70H10	Isolmant Fascia Tagliamuro Strong (6 mm thk.)	10 cm x 50 m bands	15 rolls = 750 m	2.50
FASTGM70H15	Isolmant Fascia Tagliamuro Strong (6 mm thk.)	15 cm x 50 m bands	10 rolls = 500 m	3.70
FASTGM70H30	Isolmant Fascia Tagliamuro Strong (6 mm thk.)	30 cm x 50 m bands	5 rolls = 250 m	7.30

ISOLMANT4YOU

Thanks to our new dry system isolmant4you Isolmant has changed the concept of renovation by adapting our technology to the needs and requirements of each single project and installation.

Isolmant's innovative acoustic insulation technology can be combined with different plasterboard boards to create tailored solutions to suit any environment and renovation project. An efficient, sustainable, healthy dry system that is fast and easy to install does not require demolition work, and guarantees excellent and long-lasting results.

The Isolmant4you dry system consists of **three main products** (Isolgypsum Special, Isolgypsum Perfetto and Isolgypsum Telogomma) each available in **four versions** (Standard, Hydro, D+ Salus and D+ Resisto). Thus, each product is designed for a specific installation, which perfectly meets the needs of the product applicator and the end consumer.



The versatility of the range makes it possible to find the right solution in case of low thickness, where it is possible to simply place a laminated board, and where it is possible to intervene with complex structures (e.g. lining with metal structures).

Isolmant4you was created to meet the comfort levels of single residential user with specific solutions for renovation and refurbishment, but which can also be included in the design of new structures to increase the sound insulation of the walls, whether they are partitions or perimeter walls.



ISOLGYPSUM SPECIAL

ISOLGYPSUM SPECIAL



IsolGypsum Special is a panel made of 10 mm Isolmant special, available in our unique #rossoisolmant colour and coated with a specific fabric sheet, joined to four different types of plasterboard. A unique product, considered a universal "wall saver", which is acoustically and thermally soundproofed. It is a unique solution for a global, low-thickness renovation, which guarantees not only an improvement in the soundproofing power of the wall, but also a significant energy efficiency of the rooms.



ISOLGYPSUM SPECIAL STANDARD

OUR CLASSIC ISOLMANT "SALVAMURO" WITH STANDARD BOARD.

Product for thermo-acoustic renovation composed of a type A 12.5 mm thk. panel (consisting of a rehydrated gypsum core, coated on both sides with cellulosic material with the function of external reinforcement) coupled with a panel of Isolmant Special 10 mm thk.

To install with the Isolmant Special layer over the existing wall.

◆ Nominal Thickness: 22.5 mm



CODE	Description	Size	Package	€/m ²
GYPS13PE10M248	IsolGypsum Special S	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	31.60
GYPS13PE5M248	IsolGypsum Special S 5 mm	1.2 m x 2.0 m (2.4 m ²) boards	48 m ² (pallet with 20 boards)	25.20


ISOLGYPSUM SPECIAL IDRO

THE CLASSIC ISOLMANT "SALVAMURO" WITH A SPECIFIC PLATE FOR HUMID ENVIRONMENTS.

Product for thermal-acoustic renovation made of a special H2 12.5 mm thk. plate (with reduced water absorption) joined to a panel of 10 mm thk.

To install with the Isolmant Special layer over the existing wall.

◆ Nominal Thickness: 22.5 mm



CODE	Description	Size	Package	€/m ²
GYPWP13PE10M248	IsolGypsum Special SI	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	39.30
GYPWP13PE5M248	IsolGypsum Special SI 5 mm	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	32.10


ISOLGYPSUM SPECIAL D+ SALUS

ISOLMANT'S CLASSIC "SALVAMURO" WITH A HEAVIER PLATE THAT PURIFIES THE AIR.

Product for thermal acoustic renovation made of a special 12,5 mm thk. panel (with gypsum with glass fiber added), joined to a panel of 10 mm thk. The special Activ Air technology absorbs and neutralises up to 70 % of the formaldehyde in the air Covered with a special white paper for easy finishing.

To install with the Isolmant Special layer over the existing wall.

◆ Nominal Thickness: 22.5 mm



CODE	Description	Size	Package	€/m ²
GYPA13PE10M248	IsolGypsum Special D+S	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	36.00
GYPA13PE5M248	IsolGypsum Special D+S 5 mm	1.2 m x 2.0 m (2.4 m ²) boards	48 m ² (pallet with 20 boards)	29.50

ISOLGYPSUM SPECIAL D+ RESISTO

THE CLASSIC ISOLMANT "SALVAMURO" WITH A HIGH LOAD-BEARING PLATE AND GREATER SOUND-INSULATING POWER.

To install with the Isolmant Special layer over the existing wall.

◆ Nominal Thickness: 22.5 mm



CODE	Description	Size	Package	€/m ²
GYPHF13PE10M248	IsolGypsum Special D+R	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	45.90
GYPHF13PE5M248	IsolGypsum Special D+R 5 mm	1.2 m x 2.0 m (2.4 m ²) boards	48 m ² (pallet with 20 boards)	39.00

* Products available in stock for a minimum quantity of 1 pallet.

FORMATS AND PACKAGING ON REQUEST (After confirmation of feasibility by our Sales Department)

- The 1.2 m x 3.0 m version is also available for all versions, for minimum quantities to be agreed and with a 5% surcharge.
- The Standard and Idro versions are available in 1.2 m x 1.0 m and 1.2 m x 2.5 m sizes, for minimum quantities to be agreed upon and with a 5% surcharge.
- IsolGypsum Special 10 in the format 1.2 m x 2.0 m is also available on pallets of 10 boards with a 5% surcharge.
- For all versions it is possible to request the fitting with 5 mm thk. Isolmant .
- For all versions it is possible to request custom heights, with minimum production quantities of 400 plates.

For further information, please contact Isolmant's Customer Service at clienti@isolmant.it.

ISOLGYPSUM PERFETTO

ISOLGYPSUM PERFETTO



IsolGypsum Perfetto is a 10 or 20 mm thick panel made with the special Fibtec fibre laminated to four different types of plasterboard.

Thanks to its technical characteristics, this material is considered to be the material with the highest acoustic efficiency, as well as the one with the highest sustainability value. Fibtec in fact, it is the special polyester fibre patented by Isolmant: ecological, non-toxic and of unlimited duration. A performing product able to increase the sound-insulating properties of a light wall by more than 10 db. The version with Fibtec 10 mm can be glued or screwed on the frame.



ISOLGYPSUM PERFETTO STANDARD

THE ACOUSTIC PERFORMANCE OF FIBTEC COUPLED WITH STANDARD PLATE.

Product for acoustic that is made of a type A 12.5 mm thk. panel (consisting of a rehydrated gypsum core, coated on both sides with cellulose material having the function of external reinforcement) coupled to a panel of Isolmant Fibtec 10 or 20 mm.

To install with the Isolmant Special layer over the existing wall.

◆ Nominal Thickness: 22.5 - 32.5 mm



CODE	Description	Size	Package	€/m ²
GYPS13FIB10M248	IsolGypsum Perfetto S 10 mm screwable	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	31.60
GYPS13FIB20M248	IsolGypsum Perfetto S 20 mm	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	36.20

Special Fibtec blend that can be screwed


ISOLGYPSUM PERFETTO IDRO

FIBTEC ACOUSTIC PERFORMANCE COUPLED WITH A SPECIFIC PLATE FOR HUMID ENVIRONMENTS

Product for acoustic renovation walls that is made of a special H2 12.5 mm thk. (with reduced water absorption) joined to an Isolmant Fibtec 10 or 20 mm thick.

To install with the Isolmant Special layer over the existing wall.

◆ Nominal Thickness: 22.5 - 32.5 mm

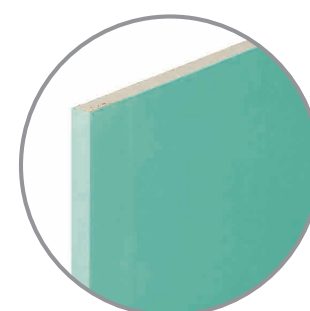

CODE	Description	Size	Package	€/m ²
GYPWP13F10M248	IsolGypsum Perfetto SI 10 mm screwable	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	39.30
GYPWP13F20M248	IsolGypsum Perfetto SI 20 mm	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	44.20

Special Fibtec blend that can be screwed


ISOLGYPSUM PERFETTO D+ SALUS

THE ACOUSTIC PERFORMANCE OF FIBTEC IN A PAIR WITH HEAVIER PLATE THAT PURIFIES THE AIR.

Product for acoustic wall restoration consisting of a special plate with increased core density, 12,5 mm thk. (with gypsum with glass fiber added), coupled to a panel of Isolmant Fibtec 10 or 20 mm thk. The special Activ Air technology absorbs and neutralises up to 70% of the formaldehyde in the air Covered with a special white paper for easy finishing.

To be positioned with the Isolmant Fibtec side in adherence to the adjacent wall.

● Nominal Thickness: 22.5 - 32.5 mm

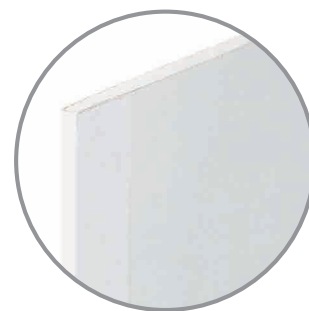

CODE	Description	Size	Package	€/m ²
GYPAAFIB10M248	IsolGypsum Perfetto D+S 10 mm screwable	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	36.00
GYPAAFIB20M248	IsolGypsum Perfetto D+S 20 mm	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	40.90

Special Fibtec blend that can be screwed

ISOLGYPSUM PERFETTO D+ RESISTO

THE ACOUSTIC PERFORMANCE IS ENHANCED BY A HIGH CAPACITY BOARD WITH A BETTER SOUND INSULATING LEVEL.

Product for acoustic wall restoration consisting of a special coated 12.5 mm thk. plasterboard (plate with increased core density, whose gypsum is added with a high quantity of glass fibres), joined to a panel of 10 mm Isolmant Fibtec sp. 10 or 20 mm thk. Covered with a special white paper for easy finishing.

To install with the Isolmant Special layer over the existing wall.

To be positioned with the Isolmant Fibtec side in adherence to the adjacent wall.

● Nominal Thickness: 22.5 - 32.5 mm



CODE	Description	Size	Package	€/m ²
GYPHFFIB10M248	IsolGypsum Perfetto D+R 10 mm screwable	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	45.90
GYPHFFIB20M248	IsolGypsum Perfetto D+R 20 mm	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	50.20

Special Fibtec blend that can be screwed

* Products stored for a minimum quantity of 1 pallet.

FORMATS AND PACKAGING ON REQUEST (After confirmation of feasibility by our Sales Department)

- The 1.2 m x 3.0 m version is also available for all versions, for minimum quantities to be agreed and with a 5% surcharge.
- The Standard and Idro versions are available in 1.2 m x 1.0 m and 1.2 m x 2.5 m sizes, for minimum quantities to be agreed upon and with a 5% surcharge.
- For all versions it is possible to request the fitting with Isolmant Perfetto 40 mm thk.
- For all versions it is possible to request custom heights, with minimum production quantities of 400 plates.

For further information, please contact Isolmant's Customer Service at clienti@isolmant.it.

ISOLGYPSUM TELOGOMMA

ISOLGYPSUM TELOGOMMA



IsolGypsum Telogomma è l'accoppiato massivo di Isolmant realizzato con un pannello a base di gomma EPDM a mescola speciale con cariche minerali e densità superficiale 4 kg/m² accoppiato a quattro differenti tipologie di lastra in cartongesso. Indicato per potenziare l'isolamento acustico in strutture leggere, diventa il prodotto ideale come seconda lastra in strutture a doppia lastra. Le sue caratteristiche tecniche garantiscono un elevato smorzamento delle vibrazioni, oltre che un importante isolamento acustico anche alle basse frequenze.



ISOLGYPSUM TELOGOMMA STANDARD

TELOGOMMA TECHNOLOGY COMBINED WITH A STANDARD BOARD THAT IS SPECIFIC TO BE USED AS A SECOND BOARD IN CASE OF LINING STRUCTURES.

Product for acoustic renovation of walls that is made of a type A version board 12.5 mm thk. (made of a rehydrated gypsum core, coated on both sides with cellulose material having the function of external reinforcement) joined to a 2 mm thk. Isolmant Telogomma Panel with 4 kg/m² surface density.

To be installed with the plasterboard in a visible position.

◆ Nominal Thickness: 14.5 mm



CODE	Description	Size	Package	€/m ²
GYPS13RBEPDM248	IsolGypsum Telogomma S	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	34.90


ISOLGYPSUM TELOGOMMA IDRO

THE TELOGOMMA TECHNOLOGY COMBINED WITH A HYDRO PLATE, SPECIFIC FOR LINING INSTALLATION IN HUMID ENVIRONMENTS.

Product for acoustic renovation of walls that is made of a type special H2 type 12.5 mm thick board (with reduced water absorption) joined to a 2 mm Isolmant Telogomma with 4 kg/m² surface density.

To be installed with the plasterboard in a visible position.

◆ Nominal Thickness: 14.5 mm



CODE	Description	Size	Package	€/m ²
GYPSWP13RB2M248	IsolGypsum Telogomma SI	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	42.00


ISOLGYPSUM TELOGOMMA D+ SALUS

TELOGOMMA TECHNOLOGY COMBINED WITH AIR PURIFYING BOARD THAT IS SPECIFIC TO BE USED AS A SECOND BOARD IN CASE OF LINING STRUCTURES

Product for acoustic renovation of walls that is made of a special type board H2 (12.5 mm thick) (with reduced water absorption) joined to a 2 mm Isolmant Telogomma with 4 kg/m² surface density. The special Activ Air technology absorbs and neutralises up to 70% of the formaldehyde in the air. Coated with a special white paper for easy finishing.

To be installed with the plasterboard in a visible position.

■ Nominal Thickness: 14.5 mm



CODE	Description	Size	Package	€/m ²
GYPAEPDM2M248	IsolGypsum Telogomma D+S	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	38,50


ISOLGYPSUM TELOGOMMA D+ RESISTO

TELOGOMMA TECHNOLOGY ENHANCED BY AN HD BOARD AND INCREASED SOUND INSULATION.

Product for acoustic renovation of walls that is made of a coated special plasterboard 12.5 mm thick with increased core density, whose gypsum is added with a high quantity of glass fibres), joined to a 2 mm panel of Isolmant Telogomma with 4 kg/m² surface density. Coated with a special white paper for easy finishing.

To be installed with the plasterboard in a visible position.

■ Nominal Thickness: 14.5 mm



CODE	Description	Size	Package	€/m ²
GYPHFEPDM2M248	IsolGypsum Telogomma D+R	1.2 m x 2.0 m (2.4 m ²) boards*	48 m ² (pallet with 20 boards)	48,10

* Products available in stock for a minimum quantity of 1 pallet.

FORMATS AND PACKAGING ON REQUEST (After confirmation of feasibility by our Sales Department)

■ For all versions it is possible to order customised heights, with minimum production quantities of 400 boards.

For further information, please contact Isolmant's Customer Service at clienti@isolmant.it.

ISOLGYPSUM GOMMA XL



Product for acoustic renovation of walls that is made of a type A version board 12.5 mm thk. (made of a rehydrated gypsum core, coated on both sides with cellulose material having the function of external reinforcement) joined to a 20 mm thick SBR rubber layer with 14 kg/m² surface density. To install with the SBR rubber layer over the existing wall.

◆ Nominal Thickness: 32.5 mm

CODE	Description	Size	Package	€/m ²
GYP13RBXL20M224	IsolGypsum GOMMA XL	1.2 m x 2.0 m (2.4 m ²) boards	24 m ² (pallet with 10 boards)	83.80

ISOLMANT FASCIA TAGLIAMURO ISOLGYPSUM



Bands with 5 cm HD Isolmant adhesive (70 kg/m³) specific to install laminated plasterboard boards.

◆ Nominal Thickness: 6 mm

CODE	Description	Size	Package	€/m
FADISTGMGYPS6H5	Isolmant Fascia Tagliamuro IsolGypsum	5 cm x 25 m bands	10 bands = 250 m	1.70

ISOLMANT INCOLLAFACILE



"SUCTION CUP EFFECT" SEALING ADHESIVE SPECIFIC FOR JOINING AND SEALING PLASTERBOARD PLATES, WHETHER BARE OR LAMINATED.

Universal elastic adhesive based on MS polymers with a high initial grip. This product offers an excellent grip on most materials and it is specific to install bare or laminated plasterboard boards. Non- corrosive and solvent free Ensures a good grip even on wet surfaces.

- ◆ 290 ml cartridge
- ◆ Performance: 1 cartridge per board

CODE	Description	Size	Package	€/box
ISOLCOLLAHP	Isolmant Adesivo Universale HP	290 ml cartridge	24 cartridge box	408.20

ISOLMANT PERFETTO CG


ECOLOGICAL AND EFFECTIVE THE TOP FOR PLASTERBOARD STRUCTURES, IDEAL BOTH IN VERTICAL STRUCTURES AND IN FALSE CEILINGS.

This product consists of a IsolFIBTEC PFT panel (recycled fibre of polyester for technical application) whose density increase along the thickness. This fibre has high thermal and acoustic performance and it is recommended for plasterboard installations. Non-toxic, ecological, with unlimited duration. Reaction to fire: Euroclass B-s2,d0.

◆ Nominal Thickness: 25 - 45 mm



CODE	Description	Size	Package	€/m ²
PERFETTO25CG	Isolmant Perfetto CG 25 mm	panels of 0.6 m x 1 m	pack of 30 panels (18 m ²)	15.30
PERFETTO45CG	Isolmant Perfetto CG 45 mm	panels of 0.6 m x 1 m	pack of 20 panels (12 m ²)	21.80

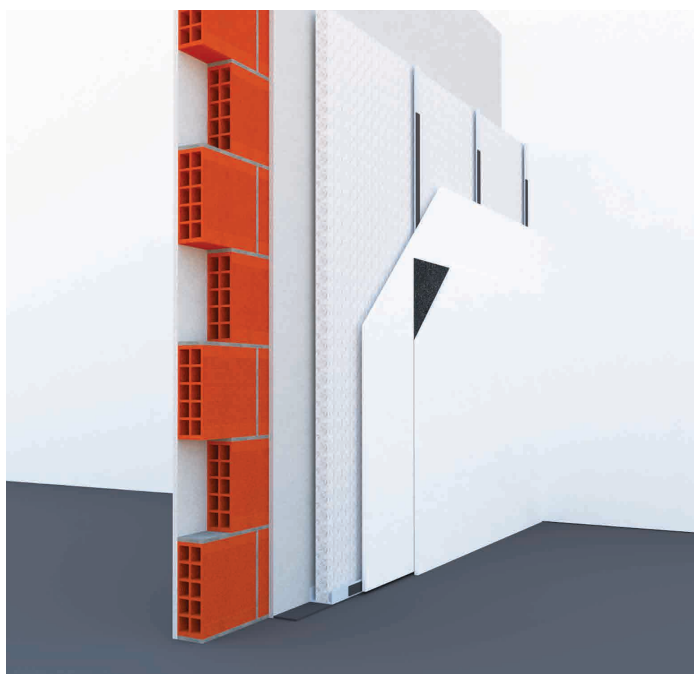

SETTO ACUSTICO

Acoustic laminated element that completes the internal partitions or plasterboard walls to be placed in the plenum between the wall and the lower slab or between the wall and the upper slab.

ISOLMANT SETTO ACUSTICO FIBRA



THE MOST FLEXIBLE SOLUTION CAN BE SHAPED AROUND THE EXISTING PIPES AND DUCTS.


Acoustic laminated element that completes the internal partitions or plasterboard walls to be placed in the plenum between the wall and the lower slab or between the wall and the upper slab. This consists of a IsolFIBTEC FLC panel (high density and thermo-bonded fibre of recycled polyester (60 kg/m³).

- Nominal Thickness: 8 cm
- Length: 120 cm
- Height: as per request



* Prices will be calculated upon ordering and based on the height chosen by our customer.

CODE	Description	Size	Package	€/item*
ISOLSETTOFIBRA	Isolmant Setto Acustico Fibra LC	1.20 m x 1 m	single	81.20

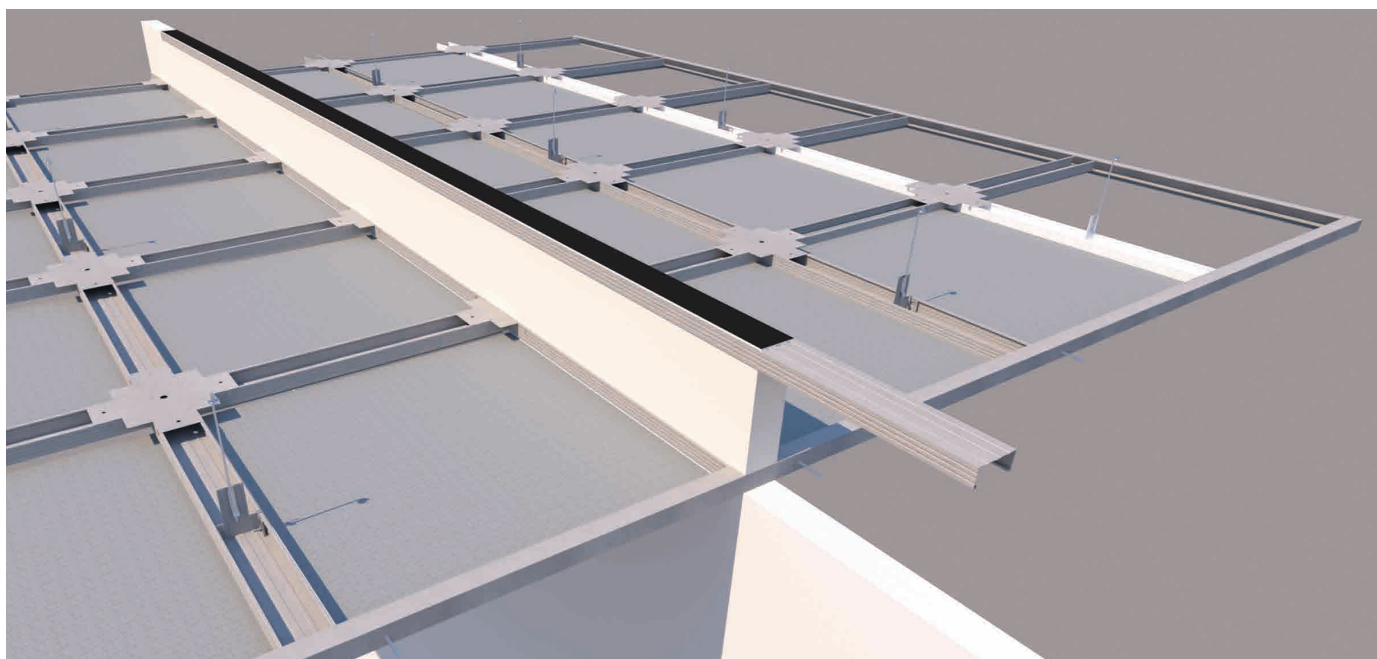

These elements can reduce insulation losses due to the formation of acoustic bridges (losses estimated at around 10 db) at the upper or lower vertical joints at the partitions.

ISOLMANT SETTO ACUSTICO CG

THE MOST EFFECTIVE SOLUTION, WITH SOUND INSULATING POWER $R_w = 48$ DB.



Acoustic laminated element that completes the internal partitions or plasterboard walls to be placed in the plenum between the wall and the lower slab or between the wall and the upper slab. Sandwiched with two 12.5 mm thick plasterboard boards and a IsolFIBTEC FLC panel (80 mm thermo-bonded fibre of recycled polyester).


- ◆ Nominal Thickness: 10.5 cm
- ◆ Length: 120 cm
- ◆ Height: as per request



■ Note: product manufactured only upon request and 10 working days' notice.

* Prices will be calculated upon ordering and based on the height chosen by our customer.

CODE	Description	Size	Package	€/item*
ISOLSETTOAC80	Isolmant Setto Acustico CG	1.20 m x 1 m	single	94.70

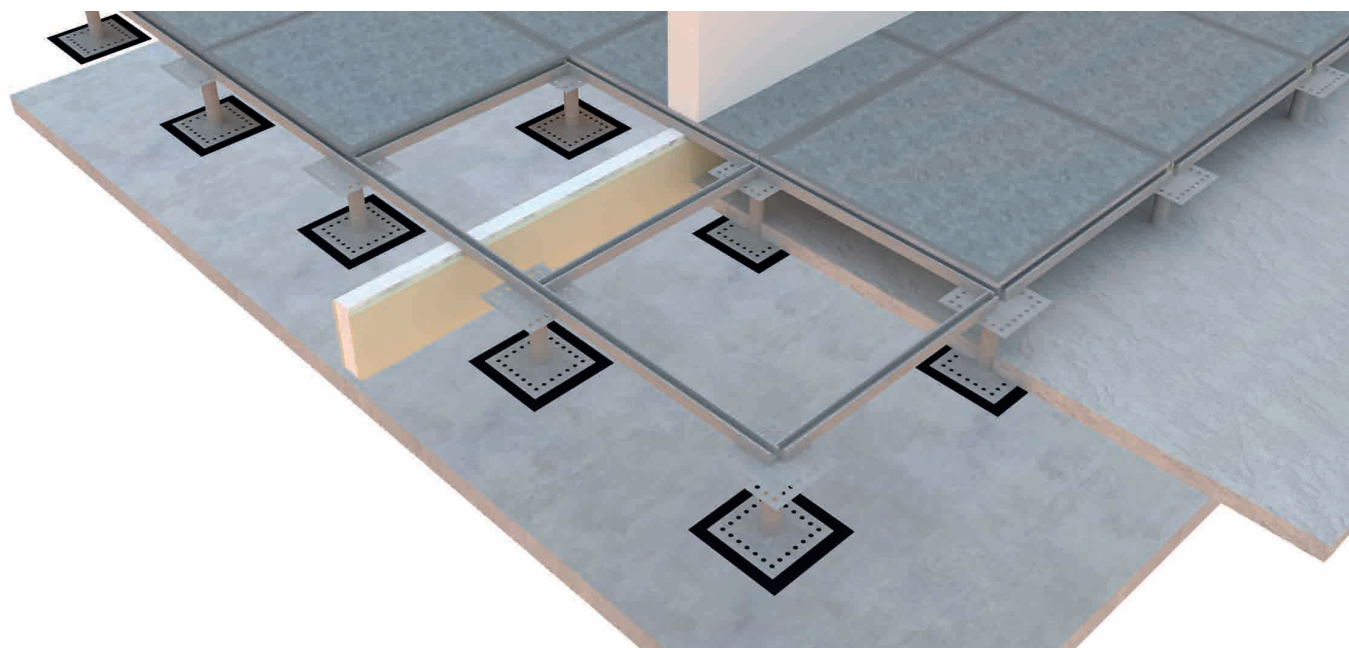



EXTERNAL NOISE



EXTERNAL NOISE

ISOLMANT TUBO HP



Patented acoustic silencer in porous expanded polypropylene (P-EPP) with high sound absorption performance and low thermal conductivity. Its cylindrical shape with decreasing diameters characterized by small dimensions (bigger diameter 160 mm, length 350 mm) allows a simple and quick installation. Meshes not included.

To be positioned with the opening towards the inside of the wall.

CODE	Description	Size	Package	€/item
ISOLTUBOHP	Isolmant Tubo HP	Boxes with 1 sound reducer	20 item boxes	81.50

ISOLMANT TUBO




Patented acoustic silencer in expanded porous polypropylene (P-EPP) with high sound absorption performance and low thermal conductivity. This element is cylindrical for a simple and quick installation. Length 32 cm, diameter 19.4 cm. Meshes not included.

The product is symmetrical (it can be installed in both directions).

CODE	Description	Size	Package	€/item
ISOLTUBO	Isolmant Tubo	boxes with 1 sound reducer	20 item boxes	75.70

ISOLMANT TELOGOMMA CASSONETTI

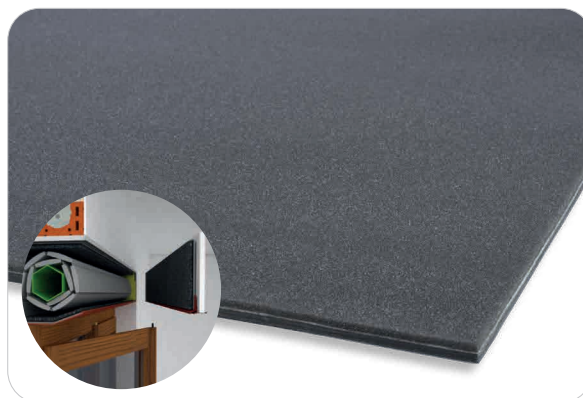


ADHESIVE-COATED PRODUCT FOR EASIER INSTALLATION

Product made of Isolmant TeloGomma joined on the lower side to a 3 mm Isolmant layer and on upper side with a 5 mm polyurethane sound absorption layer.

Adhesive film on the Isolmant layer.

◆ Nominal Thickness: 10 cm

CODE	Description	Size	Package	€/m ²
ISOLG02KG4LA5+3	Isolmant TeloGomma 5+3	rolls of 1 m x 10 m	pallets of 6 rolls (60 m ²)	58.00

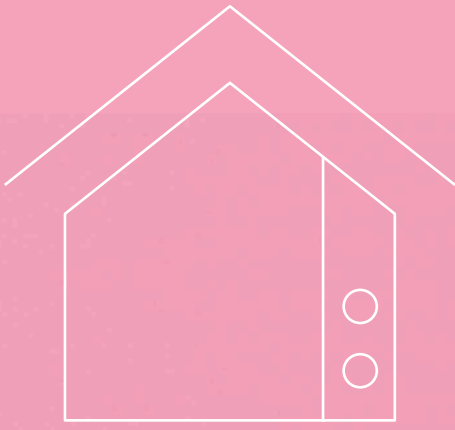


EQUIPMENT NOISE



EQUIPMENT NOISE

Proper acoustic design of the systems must provide for the passage of the pipes and drain columns in suitable insulated cables made of masonry. To prevent the noise generated by drainage ducts from passing through the walls, these pipes must be coated with sound-proofing and massive material. Isolmant Telogomma Tubi is ideal for wrapping pipes and ensuring high noise reduction, as well as avoiding rigid pipe contact with wall components (for this function it is advisable to wrap the pipes even when using silenced pipes).

ISOLMANT TELOGOMMA TUBI

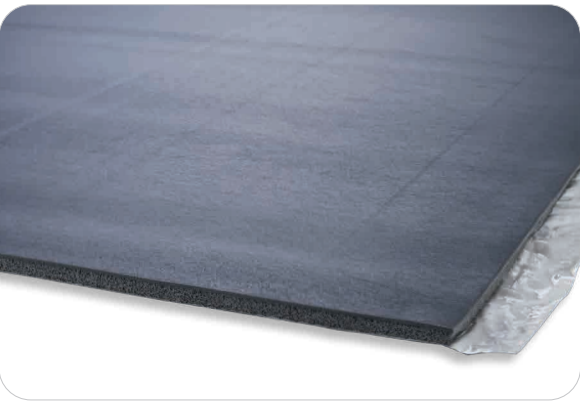


EASY TO LAY BECAUSE IT IS SOFT AND PROVIDED WITH AN ADHESIVE LAYER, IT IS SUITABLE FOR EVERY TYPE OF PIPE.

Flexible product made up of Isolmant Telogomma, suitably calibrated, and joined with 10 mm expanded rubber closed-cell mixed with elastic polyolefin polymers(thickness 10 mm).
Adhesive film on one layer.

◆ Nominal Thickness: 12 cm

CODE	Description	Size	Package	€/m ²
TELOGOMMATUBI	Isolmant Telogomma Fascia Tubi	rolls of 1 m x 3 m	3 m ² (1 roll)	47.90



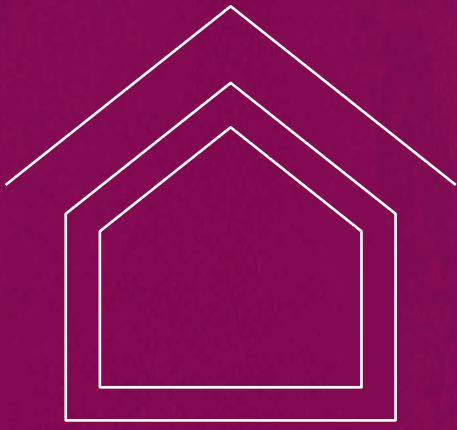

MASSIVE PRODUCTS



ISOLMANT **TELOGOMMA**

THE ORIGINAL PRODUCT OF THE TEOGOMMA LINE, SPECIFIC FOR ACOUSTIC INSULATION AND DAMPING THE VIBRATIONS IN LIGHT STRUCTURES (BOTH HORIZONTAL AND VERTICAL).

Massive elasto-dynamic covering based on special compound EPDM rubber with mineral fillers (surface density 4 kg/m²), coated on both sides with non-stick fibre. The adhesive version is available upon request.

◆ Nominal Thickness: 2 mm (4 kg/m²)



CODE	Description	Size	Package	€/m ²
TELOG02KG4	Isolmant TeloGomma 4 kg	rolls of 1 m x 3 m	pallets of 30 rolls (90 m ²)	29.80

■ Nota: upon order isolmant Telogomma is also available with thickness/mass (e.g. Telogomma 5 Kg/m², Telogomma 10 Kg/m² etc), in both standard and adhesive versions. For information on minimum order, prices and delivery times, please contact our customer service.

ISOLMANT **TELOGOMMA E+45**

SPECIFIC FOR LIGHT SLABS WHERE IT IS NECESSARY TO HAVE A COMPLETE PRODUCT (SPRING + MASS), FOR A GREATER AIRBORNE NOISE REDUCTION.

Product composed by Isolmant Telogomma (surface density 4 kg/m² approx) joined on both sides to 3 mm Isolmant.

◆ Nominal Thickness: 8 mm

CODE	Description	Size	Package	€/m ²
ISOL45	Isolmant E+45 h1 x 3 m	rolls of 1 m x 3 m	3 m ² (1 roll)	49.60

ISOLMANT **TELOGOMMA TT**

PARTICULARLY SUITABLE FOR LIGHTWEIGHT SLABS WITH LOW-THICK SCREED (NOT LOWER THAN 3 CM). IT IS ALSO SPECIFIC TO INSULATE BATHROOM FLOORS OR SHOWER TRAYS.


Product composed by Isolmant Telogomma (surface density 5 kg/m² approx) joined to 3 mm Isolmant on the upper side and coated with anti-stick fibre on the underside.

To install with the rubber side upwards in horizontal installations (or in a visible position in wall applications).

◆ Nominal Thickness: 5.5 mm

CODE	Description	Size	Package	€/m ²
ISOLG02	Isolmant TeloGomma TT (5 kg/m ²)	rolls of 1 m x 3 m	pallets of 20 rolls (60 m ²)	46.90

ISOLMANT CEMENTO ARMATO

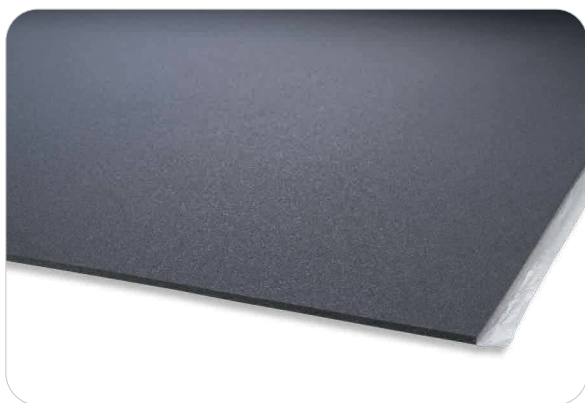

SPECIFIC PRODUCT FOR THE COATING OF REINFORCED CONCRETE STRUCTURES.

Physically reticulated expanded closed-cell polyethylene with one adhesive side to coat reinforced concrete structures (stairwells, elevator compartments and pillars in general).

◆ Nominal Thickness: 5 - 10 mm

CODE	Description	Size	Package	€/m ²
ISAD05N	Isolmant 5 N adesivo	rolls of 1.5 m x 100 m	150 m ² (1 roll)	10.90
ISAD10N120R	Isolmant 10 N adesivo	rolls of 1.2 m x 60 m	72 m ² (1 roll)	19.30

ISOLMANT DAMP



Product made of a selected agglomerate of vulcanized rubber granules with a density of about 700 kg m³ to be installed as anti-vibration underlay on systems or under heavy loads.

◆ Nominal Thickness: 5 - 10 - 20 mm

CODE	Description	Size	Package	€/m ²
DAMP5H1L10	Isolmant Damp 5 mm	rolls of 1 m x 10 m (10 m ²)	10 m ² (1 roll)	17.80
DAMP10H1,2L1	Isolmant Damp 10 mm	1 m x 1.20 m (1.2 m ²) boards	120 m ² (pallet with 100 boards)	33.10
DAMP20H1,2L1	Isolmant Damp 20 mm	1 m x 1.20 m (1.2 m ²) boards	60 m ² (pallet with 50 boards)	59.00

ISOLMANT STRONG



Isolmant HD underlay (approx. 70 kg/m³) for special installations.

◆ Nominal Thickness: 6 mm



CODE	Description	Size	Package	€/m ²
ISOL1406N50	Isolmant Strong	rolls of 1.50 m x 50 m	75 m ² (1 roll)	19.30

DRY INSTALLATIONS **isolmant** 4you

taylor-made

acoustic comfort



Isolmant4you is:
#customizable
#easy-to-use
#effective
#sustainable

Our new Isolmant4you drywall system changes the concept of renovation by adapting our technology to the needs of the market through tailored solutions for every environment and renovation project. Three main products (IsolGypsum Special, IsolGypsum Perfetto and IsolGypsum Telogomma) are available in four versions, to perfectly meet the needs of the user and the final consumer.

>> FURTHER INFORMATION ON ISOLMANT4YOU.IT

ADHESIVE FILM AND TRIM



Depending on the type of material (standard, density, thickness, etc.) it is possible to request one adhesive side or both and the longitudinal cut (in strips) in advance when ordering. The time required for the processing required will be communicated on a case-by-case basis. The minimum quantity that can be processed is a roll or a pack.

CODE	DESCRIPTION	€/m ²
60ADES	Adhesive film for all thickness products (if possible, on the product)	1.50 net
60BIAD	Double adhesive film all thickness products (if possible on the product)	3.00 net
60TAGLIO	Longitudinal cut (in strips) (if possible on the product)	+ 10%*

*Note: The extra cost for the cut will be applied based on the standard format price.

SHIPPING TERMS AND CONDITIONS and payment methods based on the value of the orders issued

	FOR ORDERS WITH TAXABLE VALUE UP TO € 400.00	FOR ORDERS WITH TAXABLE VALUE RANGING BETWEEN € 400.00 AND € 750.00	FOR ORDERS WITH TAXABLE VALUE HIGHER THAN € 750.00
 SHIPPING	PRODUCT COLLECTED AT SITE	FIXED SHIPPING FEE € 70.00	FREE OF CHARGE TRANSPORT
 PAYMENT	Advance payment upon confirmation (except for customers with multiple monthly invoicing)	30-day billing via bank order in a single instalment.	As per Customer process

N.B.

Although, these instructions are the result of our best expertise they are indicative. The user should establish whether the product is suitable for its intended application. The user will be also in charge of all the responsibility for the use of the product itself.

The technical information in this catalogue replace the previous one.

Tecnasfalti reserves to change product size and packaging without notice.

For further information please refer to the website www.isolmant.it

Due to the unstable market situation linked to the increase in the costs of raw materials, energy and ancillary production and transport, the price list during the year could undergo variations even for the cost of a single product, or a few products originated from the same raw material, with immediate effect at the time of communication.

The new way to well-being



Green Generation is Isolmant's project for the sustainable procurement of materials, which led the company to obtain the important international ISCC certification.

Thanks to this activity Isolmant is today able to introduce in our production, in compliance with the provisions and requirements of the SDGs 2030, materials for acoustic insulation a raw material of non-fossil origin.

Responsible sourcing of sustainable materials supports the contribution to the bioeconomy without changing the production process or the performance and technical characteristics of the final products.



GO TO GREEN
GENERATION

isolmant



Isolmant Green Generation: a journey to the same destination but from a new starting point.

Find out more on isolmant.it

For purchase orders, please contact:
ordini@isolmant.it

For commercial information:
clienti@isolmant.it

For technical information about our products:
tecnico@isolmant.it

For general information:
segreteria@isolmant.it

Follow us



www.isolmant.it
www.sistemapavimento.it
www.isolmant4you.it
www.isolspace.it



cod. Articolo D004

isolmant is a registered trademark of Tecnasfalti srl. All the trademarks in this catalogue are © Tecnasfalti. All rights reserved.
Copying, even partially is forbidden – In force since 07/03/2022 – This document supersedes and replaces all previous versions.

TECNASFALTI Srl | Via dell'Industria, 12 Loc. Francolino 20074 Carpiano (Mi)
Tel +39 02 9885701 | Fax +39 02 98855702 | clienti@isolmant.it | www.isolmant.it