

ISOLMANT ISOLMANT COVER

ACCESSORIES

PROTECTING, ANTI-SPLIT COVER CONCEIVED TO TEMPORARY PROTECT YOUR FLOORING.

WHAT IS ISOLMANT COVER?

Protecting, anti-split cover made of High quality non-woven fabric for temporary flooring protection. It is specially designed to protect floorings from post installation work. Isolmant Cover is featured by a upper side made of a transparent, liquid resistant PE film and a white self-adhesive lower side.

CAMPI DI APPLICAZIONE

Isolmant Cover is ideal for protecting your flooring during further steps after installing. It protects tile, wood or marble floorings and stairs or carpets. It can protect any surface from mechanical damage resulting from dripping of liquids or falling objects. It is re-usable.

ADVANTAGES

- Non-slip.
- Impervious to water and oils.
- Reusable.

SPECIFIC APPLICATIONS

- Easy and dust-free cutting using a utility knife or box cutter.
- Anti-slip layer that facilitates overlapping and sealing of sheets.
- No need to tape overlaps.
- When used on a ladder, it does not slip even if not taped.
- To be laid with the transparent PE film facing upwards.

ISOLMANT Green Planet

- Free of hazardous substances such as asbestos, formaldehyde, halogens and heavy metals.
- Solvent-free. It does not contain other ozone-depleting substances.
- It can be disposed of according to EWC No. 170604.



HEALTHY



ECOLOGICAL


> To be installed with the PE coating facing upwards.

NOMINAL THICKNESS:	2.5 mm
WATER RESISTANCE:	7.000 / mm water column
CE MARKING:	Harmonised standards for CE marking are NOT currently available for acoustic insulation products. This means that Isolmant products are currently NOT subject to CE marking, nor to the drawing up of a PDO (declaration of performance) or DDP (declaration of performance). All Isolmant products are placed on the market in compliance with the regulations in force in the country of destination and with the necessary certifications to guarantee their use in dedicated applications.
SIZE:	Rolls of: 1.0 m x 25 m equal to 25 m ²

ITEM SPECIFICATIONS

Multifunctional anti-slip protective cover made of high quality non-woven fabric 180gr/m² coated with waterproof transparent PE film (type IsolDrum Cover).

ISOLMANT COVER INSTALLATION

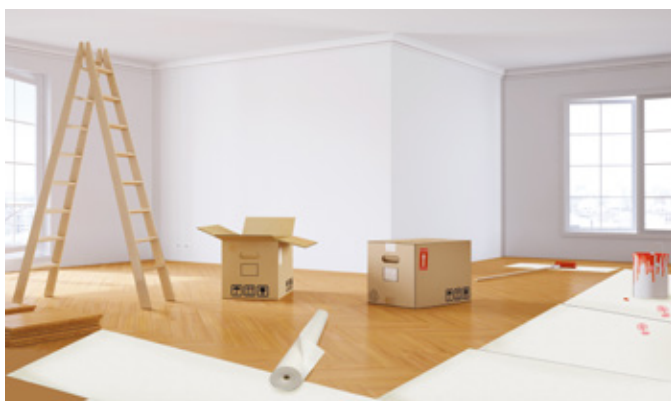

1

Isolmant Cover is installed with the non-slip side facing down and the transparent protective PE film facing up.

Clean the surface, by carefully removing dust and debris. Install IsolDrum Cover by overlapping the sheets by about 10 cm. It is not necessary to tape the product.

WARNINGS:

*This data sheet does not constitute a specification and, if it consists of several pages, please ensure that you have consulted the complete document. Although these instructions are the result of our best expertise they are indicative. The user should establish whether the product is suitable for its intended application. The user will be also in charge of all the responsibility for the use of the product itself.

**The sound insulation values given in this technical data sheet are the result of laboratory tests or tests carried out on site: they cannot be considered a predictive value for every situation that may occur on site. Acoustic performance is closely linked to the specific conditions of each site.

***Caution: do not expose the product to direct sunlight.

isolmant



Via dell'Industria 12, Località Francolino 20074 Carpiano (Mi) Tel. +39 02 9885701 Fax +39 02 98855702
 clienti@isolmant.it - www.isolmant.it - www.sistemapavimento.it - www.isolmant4you.it

Isolmant is a TECNASFALTI srl's registered trademark - © TECNASFALTI - All rights reserved - Copying, even partially, is forbidden - In force since November 2020 - This document supersedes and replaces all previous versions.