



ISOLMANT UNDERSPECIAL BIPLUS


UNDERSCREED INSULATION

High performance product, with special anti tearing technical fabric fibre-reinforced specific for underfloor sound insulation in single-layer structures with finishing screed \geq 5 cm.

WHAT IS ISOLMANT UNDERSPECIAL BIPLUS

High performance resilient layer made of polyethylene Isolmant Special joined on the upper side to FIBTEC XT1 FIBRE-REINFORCED (screen printed anti-tearing fibre) and on the lower side to FIBTEC XF3 (special needle-worked fibre produced according to specifications designed). It provides excellent impact sound and airborne insulation for horizontal partitions. 11 mm and 16 mm thicknesses available.

Available thicknesses:



SPECIFIC APPLICATIONS

Isolmant UNDERSPECIAL BIPLUS is specific for floating screeds as provided by UNI 11516:2013 standards with any type of slab. As well as being suitable for use in two screed layer solutions, the fibre-reinforced top layer can also be used as FIBRE-REINFORCED top layer can also be used as a top layer which guarantees the product's high resistance to foot traffic and tearing, makes it particularly suitable for creating floating screeds in single screed layer solutions. It requires the creation of a finishing screed at least 5 cm thick (for Biplus 11 mm) or 7 cm thick (for Biplus 16 mm). Screeds with lower thickness should be reinforced by means of a suitable metal mesh or fibres. In case of disjoining a floating screed from perimeter walls, it is recommended not to turn Isolmant UnderSpecial Biplus upside down but to use Isolmant Fascia Perimetrale. To install Isolmant UnderSpecial Biplus with the screen-printed side facing upwards.



All our products with the "Guaranteed Green Planet" logo are compliant with the sustainability criteria of the most important environmental protocols and certified according to the major national and international standards.



SUSTAINABLE



HEALTHY




ECOLOGICAL


UnderSpecial Biplus is REMADE IN ITALY certified ⁽¹⁾, product certification, under ACCREDIA accreditation, which attests to the recycled content in the product.

This certification is accepted during the tender and award phase, in accordance with the provisions of the public procurement regulations and the CAM.

RECYCLED CONTENT CERTIFICATE REMADE UNDERSPECIAL BIPLUS 11 mm N° IT335452 Issued on 03/09/2024			
Raw material	% of raw material in the product	% of recycled content in 1 kg of raw material	% of recycled content in the finished product
FIBTEC XF3	51%	62%*	31,6%
SPECIAL	38%	0%**	
FIBTEC XT1	11%	0%	



RECYCLED CONTENT CERTIFICATE REMADE UNDERSPECIAL BIPLUS 16 mm N° IT335452 Issued on 03/09/2024			
Raw material	% of raw material in the product	% of recycled content in 1 kg of raw material	% of recycled content in the finished product
FIBTEC XF3	37%	62%*	22,9%
SPECIAL	55%	0%**	
FIBTEC XT1	8%	0%	



* Minimum percentage required by CAM for this type of raw material 50%.

** For polyethylene, in CAM, a minimum recycled content is not required, in fact cross-linked polyethylene is not recyclable with current technologies due to its thermosetting structure and the complexity of the separation process (visit the site for further information). If you care about the topic, look at Fossil Free products!

OTHER SUSTAINABILITY CHARACTERISTICS



Result to VOC emission test:
- Indoor Air Comfort;



It helps achieve credits for a building's **environmental certification according to the following protocols:**



Low environmental impact.












Can be disposed according to **EWC No. 170604** insulation materials NON-HAZARDOUS plastics.






⁽¹⁾ The central aspect of the REMADE® certification is the preparation of a traceability model of material flows in the production process and transparency of the operations carried out and the relevant documentation.

It is an effective tool to respond to the growing attention paid to materials deriving from recycling, recovery and by-products, which comes from the recent global model of sustainable development of the circular economy, characterized by the maintenance, for the longest possible time, of the value of products, materials and resources in the system, which are returned to the product cycle at the end of their use, so that the generation of waste is minimized, to help develop a sustainable, low-carbon, resource efficient and competitive.

ADVANTAGES

-  Excellent acoustic impact sound insulation.
-  Optimal airborne noise reduction.
-  Suitable for use in both renovation and new construction.
-  High resistance to foot traffic and tearing.
-  Better load distribution.
-  Low thermal conductivity.
-  Unalterable over time unlimited durability.
-  Contact with water does not affect performance or characteristics.
-  Mould and insects resistant.

INSTALLATION ADVANTAGES

-  Easy to lay products.
-  Easy to trim: can be easily cut with a utility knife or box cutter.
-  This product comes with adhesive to seal the overlapping fabric.

ISOLMANT UNDERSPECIAL BIPLUS > TECHNICAL SPECIFICATIONS

To be positioned with the screen printed fabric facing upwards.

NOMINAL THICKNESS:	11 mm	16 mm
DYNAMIC STIFFNESS:	$s'_t = 9 \text{ MN/m}^3$ ⁽¹⁾	$s'_t = 8 \text{ MN/m}^3$ ⁽²⁾
IMPACT SOUND INSULATION:	$\Delta L_w = 35 \text{ dB}$	$\Delta L_w = 37 \text{ dB}$
"IN SITU" IMPACT SOUND INSULATION:	$L'_{n,w} = 50 \text{ dB}$ ⁽³⁾	$L'_{n,w} = 47 \text{ dB}$ ⁽⁴⁾
COMPRESSION CLASS:	CP2 ⁽⁵⁾	
CONDUCTIVITY:	$\lambda = 0.035 \text{ W/mK}$	
THERMAL RESISTANCE:	$R_t = 0.314 \text{ m}^2\text{K/W}$	$R_t = 0.457 \text{ m}^2\text{K/W}$
SPECIFIC HEAT CAPACITY:	$c = 2100 \text{ J/kgK}$	
VAPOUR RESISTANCE:	$\mu = 3600$	
EMISSION OF VOLATILE ORGANIC COMPOUNDS:	Indoor Air Confort ⁽⁶⁾	
CE MARKING:	Harmonised standards for CE marking are NOT currently available for acoustic insulation products. This means that Isolmant products are currently NOT subject to CE marking, nor to the drawing up of a DOP (declaration of performance). All Isolmant products are placed on the market in compliance with the regulations in force in the country of destination and with the necessary certifications to guarantee their use in dedicated applications.	
SIZE:	Rolls of: 1.50 m x 50 m (h x L) = 75 m ²	Rolls of: 1.50 m x 25 m (h x L) = 37.5 m ²
	This product comes with adhesive to seal the overlapping fabric.	
PACKAGE:	Single rolls	

(1) Istituto Giordano test report no. 359510

(2) Test report no. 1015_1618

(3) Value measured on site - see structure at page 5 of this technical data sheet

(4) Value measured on site - see structure at page 6 of this technical data sheet


(5) Test report No. 1002_1410 - Test report No. 1010_1501

(6) Istituto Giordano test report no. 378402

ITEM SPECIFICATIONS

Resilient layer made of physically reticulated expanded closed-cell polyethylene, joined on the upper side with a special needle-worked FIBRE-REINFORCED tear-proof film and on the lower side with a special needle-worked fibre that is conceived to enhance the acoustic performance (Isolmant UnderSpecial Biplus type). 11 or 16 mm nominal thickness. Dynamic stiffness $s'_t = 9 \text{ MN/m}^3$ for the 11 mm version (certified value) and $s'_t = 8 \text{ MN/m}^3$ for the 16 mm version. Impact sound insulation $\Delta L_w = 35 \text{ dB}$ and 37 dB for versions 11 or 16 mm respectively. Indoor Air Confort test report by Eurofins. Classified B & C for 11 mm and 16 mm versions by Remade in Italy for recycled content and compliant with the requirements of the CAM Decree 2022. To be positioned with the screen printed fabric facing upwards. This product comes with adhesive to seal the overlapping fabric.

RESIDENTIAL BUILDING IN CASIER (TV)

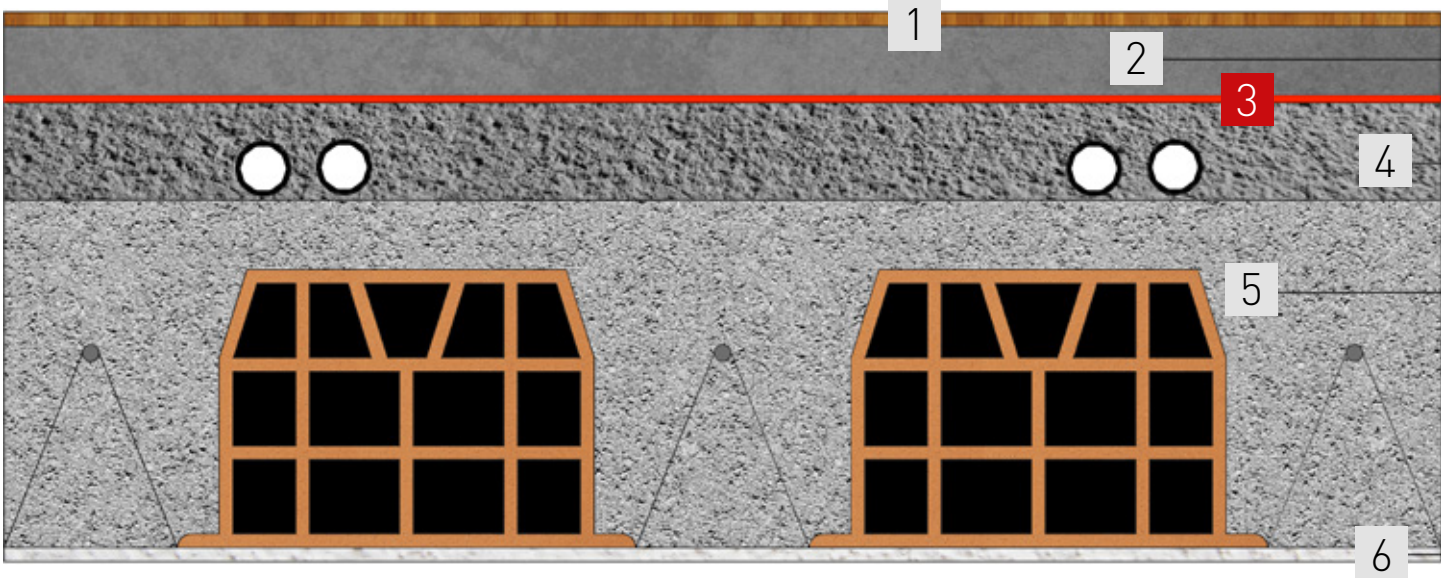


No.	Layer	Material	Thickness (m)	Surface mass (kg/m ²)
1	Flooring	Wooden flooring	0.01	
2	Supporting screed	Sand and cement	0.05	90
3	Resilient material	Isolmant UNDERSPECIAL BIPLUS	0.011	
4	Levelling Screed	Lightweight concrete	0.08	24
5	Structural slab	Concrete	0.24	290
6	Plaster	Premix	0.01	14
Total thickness:			0.401	

$$L'_{n,w} (C_1) = 50 (-3) \text{ dB}$$


FREQUENCY IMPACT SOUND INSULATION

— Measured curve
— Reference curve

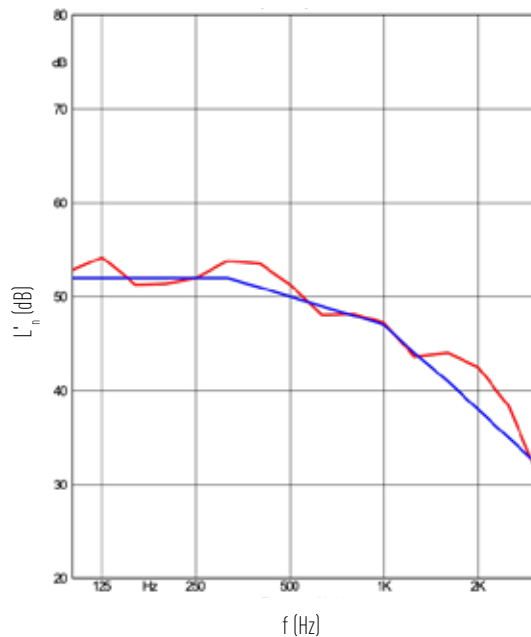

Frequency (Hz)	L' _n (dB)
100	52,8
125	54,2
160	51,3
200	51,4
250	52
315	53,8
400	53,5
500	51,3
630	48,1
800	48,2
1000	47,2
1250	43,6
1600	44
2000	42,5
2500	38,4
3150	30,6

RESIDENTIAL BUILDING IN CIMADOLMO (TV)

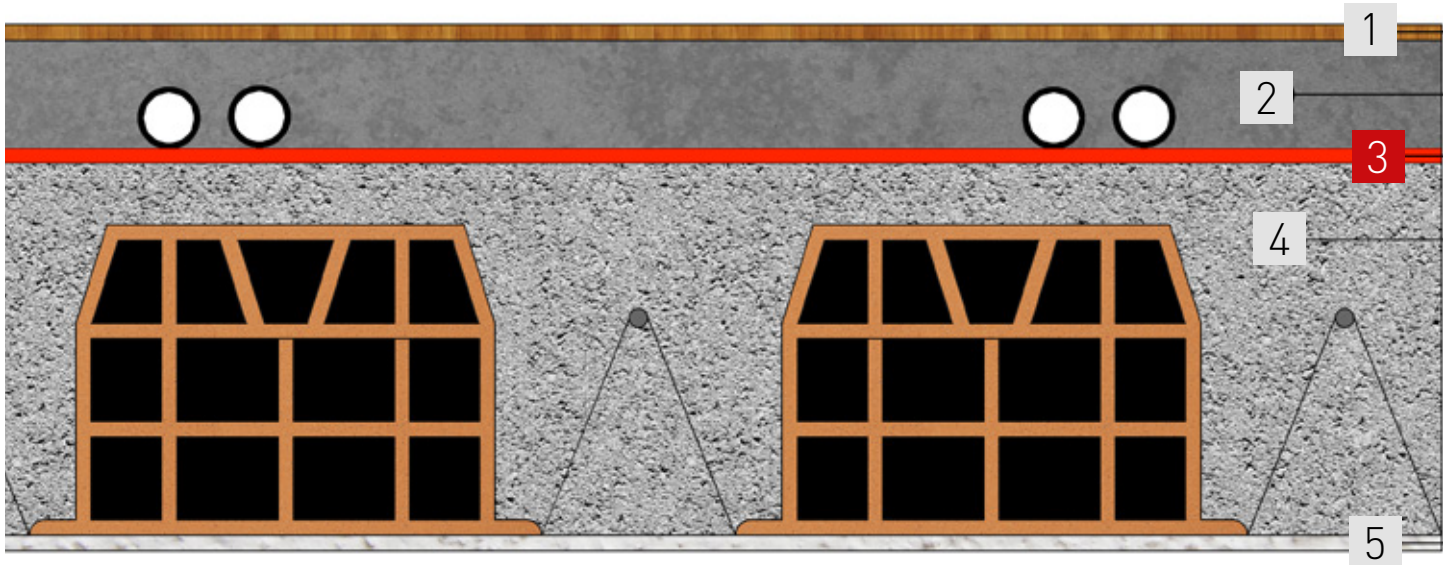


No.	Layer	Material	Thickness (m)	Surface mass (kg/m ²)
1	Flooring	Wooden flooring	0.01	
2	Supporting screed	Sand and cement	0.08	144
3	Resilient material	Isolmant UNDERSPECIAL BIPLUS	0.016	
4	Structural slab	Concrete	0.25	300
5	Plaster	Premix	0.01	14
Total thickness:			0.366	

$$L'_{n,w} (C_1) = 47 (-2) \text{ dB}$$

FREQUENCY IMPACT SOUND INSULATION


— Measured curve
— Reference curve

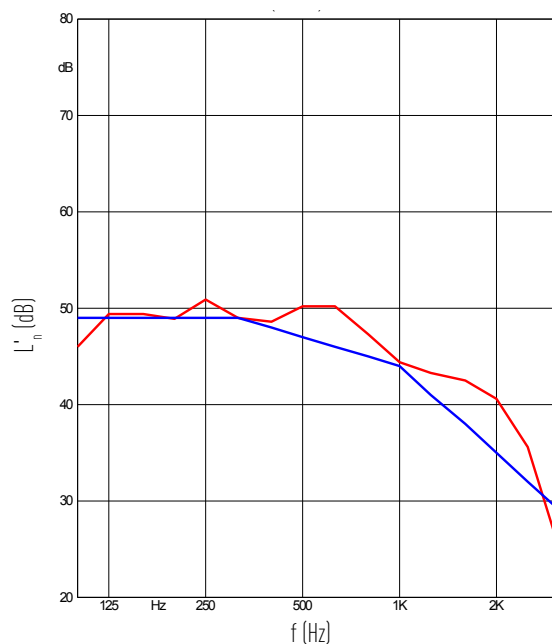

Frequency [Hz]	L' _n [dB]
100	46
125	49,4
160	49,4
200	48,9
250	50,9
315	49
400	48,6
500	50,2
630	50,2
800	47,3
1000	44,4
1250	43,3
1600	42,5
2000	40,6
2500	35,6
3150	24,8

STEP 1

INSTALLING FASCIA TAGLIAMURO

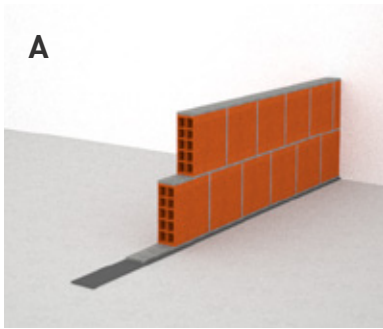

Before installing all the partitions, Isolmant Fascia Tagliamuro must be laid. This high density, reticulated polyethylene foam accessory is specifically designed to disjoint partitions and slabs, thereby helping to reduce the structural sound transmission from the walls to the slab. This band is available in different thicknesses and densities depending on the weight of the partitions (fig. A).


STEP 2 DISJOINTING OF REINFORCED CONCRETE STRUCTURES

In the presence of stairwells, elevator compartments and pillars (even if contained within the vertical partitions) that rigidly connect all the structural elements from the foundations to the last floor, it is necessary to cover them with elastic material (such as Isolmant Cemento Armato) and then finish them, where possible, with a 4/5 cm board or with coated plaster panels. With a reduced thickness element, it is possible to fix a strong plaster-holding net directly onto the elastic insulating material with nylon plugs, and then plaster it over, paying particular attention to the cracks (fig. B).



STEP 3



INSTALLING ISOLMANT UNDERSPECIAL BIPLUS RESILIENT LAYER

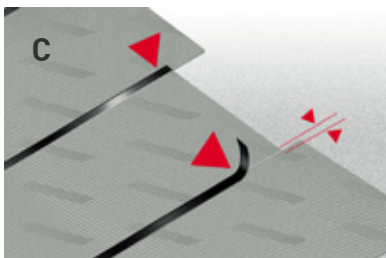

Isolmant UnderSpecial Biplus does not have an anti-tearing layer and is therefore not recommended for single-layer bases. In this case, since no levelling screed is provided (which is always advisable), Isolmant UnderSpecial Biplus must be laid directly onto the slab (which must have a flat, even surface) and then the systems must be laid in order to avoid the risk of tearing and the possible formation of air bubbles underneath. The sheets of Isolmant UnderSpecial Biplus must be accurately joined using the entire batten and sealed using the adhesive selvage on the sheet (Figure C). It is also necessary to be careful to start flush with the wall with the polyethylene, avoiding leaving visible strips of fibre near the walls: the fibre, in fact, absorbs the cement and stiffens, generating a dangerous and continuous acoustic bridge. It is therefore necessary to trim only the fibre flush with the wall in order to guarantee the presence of both layers of product over the entire surface of the floor (Fig. D).

STEP 4 INSTALLING FASCIA PERIMETRALE

To avoid acoustic bridges, the use of Isolmant Fascia Perimetrale is recommended, to be laid along the entire perimeter of the room without interruption. The height of Isolmant Fascia Perimetrale must be chosen by the designer/contractor, taking into account the actual height at each site, in order to guarantee that the band is about 2/3 cm higher than the flooring level. This excess must be trimmed after laying the floor (fig. E). The continuity of the installation must also be ensured along the thresholds of entrance doors and French windows, as well as in technical niches for housing the manifolds of the heating system, pillars, pilasters, doors and other wall movements. Specific accessories are available to facilitate this task: Isolmant Angoli e Spigoli e Isolmant Telaio Porte (fig. F1 - fig. F2). It is also necessary to avoid a gap between the band and the walls at the corners (fig. G) where cementitious material can penetrate, as well as ensuring that the perimeter band also adheres continuously along the slab-wall connection: the formation of the shell (fig. H) causes a reduction in the thickness of the screed resulting in a lack of flooring support at that point, risking cracking over time. In conclusion, before proceeding with the laying of the finishing screed, the contractor must be reasonably certain that he has created a perfect watertight tank in which the cement screed he is going to lay can "float" without establishing any rigid connection either with the load-bearing layers underneath or with the walls to its sides. Any uncovered points that could constitute an "acoustic bridge" must be covered with Isolmant Fascia Nastro.

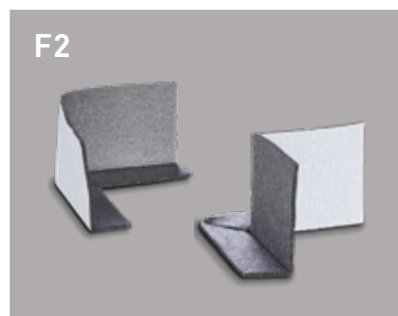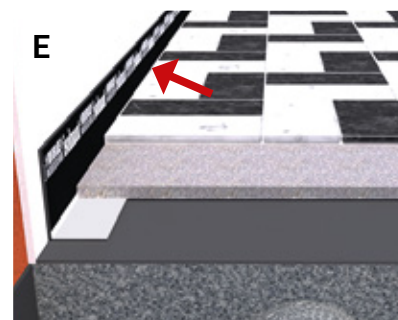



SCREED CONSTRUCTION

STEP 5

The finishing screed must guarantee adequate mechanical resistance according to the actual laying and loading conditions. Appropriate safety measures must be taken, such as assessing the adequate consistency of the mix, the curing time, the possible need to use collaborating elements (wire mesh or fibres), the sufficient compactness of the surface and the possible surface treatment with consolidating products (as indicated by the manufacturer of the screed and the reference standards). With reference to the thickness of the finishing screed, it is advisable to create a minimum thickness of no less than 4.5 cm in the case of the laying of Isolmant Underspecial 8 mm and no less than 7 cm in the case of the laying of Isolmant Underspecial 13 mm. If the thickness is less than 4.5 cm in some places, it is advisable to reinforce the screed with galvanised electro-welded mesh. In all cases, the screed must be well trodden (especially at the sides and corners), compacted throughout, smoothed and trowelled (by hand or by helicopter) to a high standard (fig. I). When pouring the screed, special care must be taken not to tear or puncture the elastic material.

STEP 6 INSTALLING FLOORING AND SKIRTING BOARDS

It is essential to inform all site operators that the excess of the perimeter band must be trimmed only after the flooring has been laid and grouted (fig. L) and before laying the skirting board. The direct contact of the flooring with the walls creates an acoustic bridge, which impedes the “floating” of the screed on the elastic underlay and causes a loss of insulation of several decibels. Therefore, the flooring should be joint to the perimeter band, ensuring the system elastic functioning. In particular, a skirting board made of tile should not be laid on the flooring but should be raised by a few millimetres and grouted with an elastic silicone-based binder or a flexible mortar (fig. M). If the joint were rigid, it would prevent the floor from floating and would escape.





WARNINGS:

* This data sheet does not constitute a specification and, if it consists of several pages, please ensure that you have consulted the complete document. Although, these instructions are the result of our best expertise they are indicative. The user should establish whether the product is suitable for its intended application. The user will be also in charge of all the responsibility for the use of the product itself.

**The sound insulation values given in this technical data sheet are the result of laboratory tests or tests carried out on site: they cannot be considered a predictive value for every situation that may occur on site. Acoustic performance is closely linked to the specific conditions of each site.

***Caution: do not expose the product to direct sunlight and bad weather.



Via dell'Industria 12, Località Francolino 20074 Carpiano (Mi) Tel. +39 02 9885701 Fax +39 02 9885702
clienti@isolmant.it - www.isolmant.it - www.sistemapavimento.it - www.isolmant4you.it

Isolmant is a TECNASFALTI srl's registered trademark - © TECNASFALTI - All rights reserved - Copying, even partially, is forbidden - In force since July 2023 - This document supersedes and replaces all previous versions.